





Test Report issued under the responsibility of:



LCIE

<b>TEST REPORT</b> <b>IEC 60335-2-80 and IEC 60335-2-98</b> <b>Safety of household and similar electrical appliances</b> <b>Part 2-80 : Particular requirements for fans</b> <b>Part 2-98: Particular requirements for humidifiers</b>	
<b>Report Number.....</b>	BXKV-ESH-P25100710
<b>Date of issue.....</b>	2025-12-31
<b>Total number of pages .....</b>	204
<b>Name of Testing Laboratory preparing the Report .....</b>	LCIE CHINA COMPANY LIMITED Building 4, No. 518, Xin Zhuan Road, CaoHejing Songjiang High-Tech Park, Shanghai P.R.C (201612)
<b>Applicant's name .....</b>	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.
<b>Address.....</b>	No.17 West section of West Street, West District of Industrial Park, Guanhaiwei Town, Cixi, Ningbo, Zhejiang Province, China.
<b>Test specification:</b>	
<b>Standard .....</b>	IEC 60335-2-80:2015 and IEC 60335-2-98:2002, AMD1:2004, AMD2:2008 for use in conjunction with IEC 60335-1:2010, COR1:2010, COR2:2011, AMD1:2013, AMD2:2016
<b>Test procedure .....</b>	CB Scheme
<b>Non-standard test method .....</b>	N/A
<b>Test Report Form No. ....</b>	IEC60335_2_80&98F
<b>Test Report Form(s) Originator ....</b>	CQC
<b>Master TRF .....</b>	Dated 2019-02-04
<b>Copyright © 2019 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b> This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. <b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

<b>Test item description</b> ..... :	Air cooler
<b>Trade Mark</b> ..... :	None
<b>Manufacturer</b> .....	ZhiYin(Ningbo) Electrical Appliance Co., Ltd. No.17 West section of West Street, West District of Industrial Park, Guanhaiwei Town, Cixi, Ningbo, Zhejiang Province, China.
<b>Model/Type reference</b> .....	KFT2001J, KFT2001D, KFT2103J, KFT2103D, KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J.
<b>Ratings</b> .....	220-240 V~, 50-60 Hz, 80 W, climate class T, Class II, IPX0


Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	LCIE CHINA COMPANY LIMITED
<b>Testing location/ address.....:</b>		Building 4, No. 518, Xin Zhuan Road, CaoHejing Songjiang High-Tech Park, Shanghai P.R.C (201612)
<b>Tested by (name, function, signature).....:</b>		Project Engineer Eavan SHI 
<b>Approved by (name, function, signature)....:</b>		Project Manger Tim Guo 
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name, function, signature).....:</b>		
<b>Approved by (name, function, signature)....:</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name + signature).....:</b>		
<b>Witnessed by (name, function, signature) .:</b>		
<b>Approved by (name, function, signature)....:</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	
<b>Testing location/ address.....:</b>		
<b>Tested by (name, function, signature).....:</b>		
<b>Witnessed by (name, function, signature) .:</b>		
<b>Approved by (name, function, signature)....:</b>		
<b>Supervised by (name, function, signature) :</b>		

<p><b>List of Attachments (including a total number of pages in each attachment):</b></p> <p>Appendix 1: Photographs (total 62 pages)</p> <p>Appendix 2: EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A2:2019+A14:2019+A15:2021+A16:2023 EN IEC 60335-2-80:2024 + A11:2024; EN 60335-2-98:2003+A1:2005+A2:2008+A11 :2019; EN 62233 :2008 (total 27 pages)</p> <p>Appendix 3: equipment list (3 pages)</p>	
<p><b>Summary of testing:</b></p>	
<p><b>Tests performed (name of test and test clause):</b></p> <p>IEC 60335-2-80:2015 IEC 60335-2-98:2002 + A1:2004 + A2:2008 IEC 60335-1:2010+A1:2013+A2:2016 EN 60335-1: 2012+A11:2014+A13:2017+A1: 2019+A14:2019+A2:2019+A15:2021+A16:2023 EN IEC 60335-2-80:2024+A11:2024 EN 60335-2-98:2003 +A1:2005+A2:2008+ A11:2019 EN 62233: 2008</p> <p>After check, full tests were performed on model KFT2001D, KFT2407D.</p> <p>Clause 6-8, 10, 11(PCB part),19.11, 20-29 were performed on model KFT2103D, KFT2605D, KFT2605D-S.</p> <p>Clause 6-8, 10, 11(switch), 20-29were performed on model KFT2001J, KFT2103J, KFT2407J, KFT2605J.</p>	<p><b>Testing location:</b></p> <p>LCIE CHINA COMPANY LIMITED Building 4, No. 518, Xin Zhuan Road, CaoHejing Songjiang High-Tech Park, Shanghai P.R.C (201612)</p>
<p><b>Summary of compliance with National Differences (List of countries addressed):</b></p> <p>The deviations EU Group differences have also been considered during this examination.</p>	

**Copy of marking plate:**

**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

English

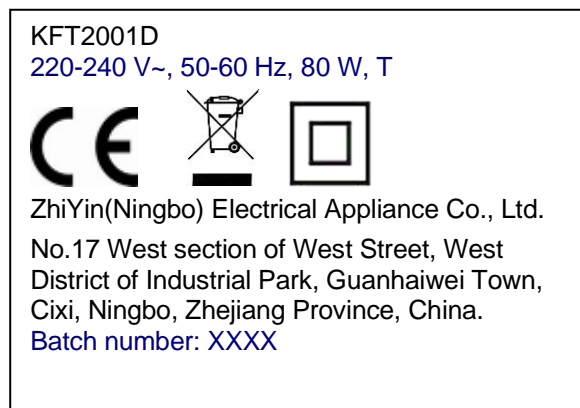

Other models are same as the above ones except the model names and power ratings.

**Note:**

- 1, For EUROPEAN market the name and address of EUROPEAN importer also should list in the marking plate. The height of CE symbol shall be no less than 5mm, WEEE symbol shall be no less than 7mm.
- 2, The separate label which indicates the name, registered trade name or registered trade mark and the postal address of the importer or authorized representatives shall also be clearly discernible from the outside of the appliance when the appliance is installed as in normal use. The postal address shall be a single point at which the importer or authorised representatives can be contacted and in the European Union countries.
3. The serial no. on above label shall include the content about a type, batch or serial number or other element allowing its identification.

<b>Test item particulars</b> .....: Air cooler	
<b>Classification of installation and use</b> .....: Class II and Portable appliance	
<b>Supply Connection</b> .....: Type Y .....:	
<b>Possible test case verdicts:</b> - test case does not apply to the test object.....: N/A - test object does meet the requirement.....: P (Pass) - test object does not meet the requirement.....: F (Fail)	
<b>Testing</b> .....:	
<b>Date of receipt of test item</b> .....: 2025-10-16	
<b>Date (s) of performance of tests</b> .....: 2025-10-16 to 2025-12-30	
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-2-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)</b> .....: ZhiYin(Ningbo) Electrical Appliance Co., Ltd. No.17 West section of West Street, West District of Industrial Park, Guanhaiwei Town, Cixi, Ningbo, Zhejiang Province, China.	

**General product information and other remarks:**

The appliances tested in this report are Air Cooler for household and indoor use only.

220-240 V~, 50-60 Hz, 80 W, climate class T, Class II, IPX0 for all models.

All models share with similar construction and electric component, the differences between them are:

Model	Control mode	Motor	Pump	Out-lookings
KFT2001J	Mechanical	YYHS-12-4 (1)	BZH-500	
KFT2001D	Electrical	YYHS-12-4 (1)	BZH-500	
KFT2103J	Mechanical	YYHS-12-4 (1)	BZH-500	
KFT2103D	Electrical	YYHS-12-4 (1)	BZH-500	
KFT2407J	Mechanical	YYHS-12-4 (2)	BZH-300	
KFT2407D	Electrical	YYHS-12-4 (2)	BZH-300	
KFT2605D-S	Electrical	YYHS-12-4 (2)	BZH-300	
KFT2605D	Mechanical	YYHS-12-4 (2)	BZH-300	
KFT2605J	Mechanical	YYHS-12-4 (2)	BZH-300	

After checked, clauses need to be performed refer to the “summary of testing”, finally only the most unfavourable results were recorded.

After testing, the samples are considered to comply with the requirements of relevant standards.

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5</b>	<b>GENERAL CONDITIONS FOR THE TESTS</b>		--
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.	50-60 Hz	P
5.6	Humidistats are short-circuited or rendered inoperative (IEC 60335-2-98)		N/A
5.7	Fans to be used in tropical climates, the tests of clause 10,11 and 13 are carried out at 40 °C +/- 2 °C (IEC 60335-2-80)	tropical climate	P
	Fans marked with ambient operating temperature, the tests of clause 10, 11 and 13 are carried out at marked value +/- 2 °C (IEC 60335-2-80)		N/A
<b>6</b>	<b>CLASSIFICATION</b>		--
6.1	Protection against electric shock: Class 0, 0I, I, II, III .....	Class II	P
	For a class III construction with a detachable power supply part the appliance is classified according to the detachable power supply part		N/A
	Protection against harmful ingress of water	IPX0	N/A
6.2	Duct fans shall be at least IPX2 (IEC 60335-2-80)		N/A
6.101	Fans shall be of one of the following classes with respect to climatic conditions (IEC 60335-2-80):		--
	- fans for temperature climates (IEC 60335-2-80)		N/A
	- fans for tropical climates (IEC 60335-2-80)	T	P
<b>7</b>	<b>MARKING AND INSTRUCTIONS</b>		--
7.1	Rated voltage or voltage range (V) .....	220-240	P
	Symbol for nature of supply, or .....	~	P
	Rated frequency (Hz).....	50-60	P
	Rated power input (W), or .....	Refer to label	P
	Electrode-type appliances shall be marked with their rated power input (IEC 60335-2-98)		N/A
	Rated current (A) .....		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark .....	Refer to label	P
	Model or type reference.....	Refer to label	P
	Symbol IEC 60417-5172, for class II appliances	Refer to label	P
	IP number, other than IPX0.....	IPX0	N/A
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol IEC 60417-5018, for class II and class III appliances incorporating a functional earth		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Symbol IEC 60417-5180 (2003-02), for class III appliances. This marking is not necessary for appliances operated only by batteries (primary batteries or secondary batteries recharged outside of the appliance) or appliances powered by rechargeable batteries recharged in the appliance.		N/A
	Fans for tropical climates shall be marked with letter T (IEC 60335-2-80)	T	P
	Fans intended for operation in location where the local temperature exceeds 40 °C shall be marked with the ambient operating temperature. (IEC 60335-2-80)		N/A
	Appliances that are manually filled shall have a level mark or other means to indicate when they are filled to their rated capacity, unless they cannot be filled beyond this capacity. This indication shall be visible when the appliance is being filled. (IEC 60335-2-98)	Level mark used	P
	If temperature of water vapour exceeds 60 °C, appliance marked with symbol IEC 60417-5597 (2002-10) or (IEC 60335-2-98/A2)	Not exceed	N/A
	with substance of the following: CAUTION: Hot water vapour (IEC 60335-2-98/A2)		N/A
7.2	Warning for stationary appliances for multiple supply		N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen	220-240V, 50-60 Hz	P
	Different rated values marked with the values separated by an oblique stroke		N/A
7.4	Appliances adjustable for different rated voltages or rated frequencies, the voltage or the frequency setting is clearly discernible		N/A
	Requirement met if frequent changes are not required and the rated voltage or rated frequency to which the appliance is to be adjusted is determined from a wiring diagram		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input or current are related to the arithmetic mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		P
	Units of physical quantities and their symbols according to international standardized system		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N/A
	correct mode of connection is obvious		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		--
	- marking of terminals exclusively for the neutral conductor (letter N)		N/A
	- marking of protective earthing terminals (symbol IEC 60417-5019)		N/A
	- marking of functional earthing terminals (symbol IEC 60417-5018)		N/A
	- marking not placed on removable parts		N/A
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means..... :	Refer to photo	P
	This applies also to switches which are part of a control		P
	If figures are used, the off position indicated by the figure 0		P
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		P
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Details concerning precautions during user maintenance		P
	The instructions state that:		--
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction		P
	- children being supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	For appliances for altitudes exceeding 2000 m, the maximum altitude is stated .....		N/A
	The instructions for appliances incorporating a functional earth states that the appliance incorporates an earth connection for functional purposes only		N/A
	If the instructions state that the guard has to be removed for cleaning purposes, the instructions shall state the substance of the following: (IEC 60335-2-80)		--
	Ensure that the fan is switched off from the supply mains before removing the guard. (IEC 60335-2-80)		N/A
	The instructions for ceiling fans shall include the substance of the following warning: (IEC 60335-2-80)		--
	WARNING: If unusual oscillating movement is observed, immediately stop using the ceiling fan and contact the manufacturer, its service agent or suitably qualified persons. (IEC 60335-2-80)		N/A
	The instructions for ceiling fans shall include the substance of the following: (IEC 60335-2-80)		--
	– the maintenance cycle and method of maintenance; (IEC 60335-2-80)		N/A
	– the weight of the appliance in kilograms; (IEC 60335-2-80)		N/A
	– that the replacement of parts of the safety suspension system device shall be performed by the manufacturer, its service agent or suitably qualified persons. (IEC 60335-2-80)		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions for fans incorporating motors containing brushes shall include the substance of the following: (IEC 60335-2-80)		--
	If it is necessary to replace the live or neutral brushes to ensure operation of the motor then both brushes and the earth brush shall be replaced at the same time. The brushes shall only be replaced by a suitably qualified person. (IEC 60335-2-80)		N/A
	The instructions shall include details regarding filling, cleaning and descaling (IEC 60335-2-98)		N/A
	The instructions shall state the substance of the following: (IEC 60335-2-98)		--
	– care should be taken when using the appliance due to the emission of hot water vapour; (IEC 60335-2-98)		N/A
	– unplug the appliance during filling and cleaning. (IEC 60335-2-98)		N/A
	The instructions for electrode-type appliances shall include the substance of the following (IEC 60335-2-98):		--
	– the composition and quantity of solution to be used and advice not to use an excessive amount of salt; (IEC 60335-2-98)		N/A
	– the appliance is not to be operated from a d.c. supply. (IEC 60335-2-98)		N/A
	If symbol IEC 60417-5597 (2002-10) used, meaning explained (IEC 60335-2-98/A2)		N/A
7.12.1	Sufficient details for installation supplied		N/A
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	The installation instructions for ceiling fans shall include the substance of the following: (IEC 60335-2-80)		--
	– the fixing means for attachment to the ceiling such as hooks or other devices shall be fixed with a sufficient strength to withstand 4 times the weight of the ceiling fan; (IEC 60335-2-80)		N/A
	– that the mounting of the suspension system shall be performed by the manufacturer, its service agent or suitably qualified persons; (IEC 60335-2-80)		N/A
	– that the fan is to be installed so that the blades are more than 2,3 m above the floor; (IEC 60335-2-80)		N/A
	– the model or type reference of a luminaire that may be installed in a fan constructed for this purpose. (IEC 60335-2-80)		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions for other fans shall include the substance of the following: (IEC 60335-2-80)		--
	– whether the fan is intended for mounting in outside windows or walls (for partition fans); (IEC 60335-2-80)		N/A
	– that the fan is to be installed so that the blades are more than 2,3 m above the floor (for fans intended to be mounted at high level); (IEC 60335-2-80)		N/A
	– that precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other fuel-burning appliances (for duct and partition fans). (IEC 60335-2-80)		N/A
	If different rated voltages or different rated frequencies are marked, the instructions state what action to be taken to adjust the appliance		N/A
	The installation instructions for appliances intended to be connected to the water mains shall state the maximum permissible water pressure in pascals. (IEC 60335-2-98)		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		--
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		--
	- max. inlet water pressure (Pa) .....		N/A
	- min. inlet water pressure, if necessary (Pa) .....		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.12.9	Instructions specified in 7.12 and from 7.12.1 to 7.12.8 appear together before any other instructions supplied with the appliance	Refer to manual	P
	These instructions may be supplied with the appliance separately from any functional use booklet		P
	They may follow the description of the appliance that identifies parts, or follow the drawings/sketches		P
	In addition, instructions are also available in an alternative format such as on a website or on request from the user in a format such as a DVD		P
	In addition, instructions are also available in an alternative format such as on a website or in a format such as a DVD.....		P
7.13	Instructions and other texts in an official language	English	P
7.14	Marking clearly legible and durable, rubbing test as specified		P
	Signal words WARNING, CAUTION, DANGER in uppercase having a height as specified.....		N/A
	Uppercase letter of the text explaining the signal word not smaller than 1,6 mm .....		N/A
	Moulded in, engraved, or stamped markings either raised above or have a depth below the surface of at least 0,25 mm, unless		N/A
	contrasting colours are used		N/A
	Markings checked by inspection, measurement and rubbing test as specified		P
7.15	Markings on a main part		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Marking clearly discernible from the outside, if necessary after removal of a cover		N/A
	For portable appliances, cover can be removed or opened without a tool		P
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P
	The symbol IEC 60417-5018 placed next to the symbol IEC 60417-5172 or IEC 60417-5180		N/A
	Symbol IEC 60417-5597 (2002-10) or (IEC 60335-2-98/A2)		N/A
	marking relating to hot water vapour near vapour outlet (IEC 60335-2-98/A2)		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N/A
<b>8</b>	<b>PROTECTION AGAINST ACCESS TO LIVE PARTS</b>		--
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
	Use of test probe B of IEC 61032 through openings, with a force of 20N: no contact with live parts		P
	Lamps are not removed. However, during insertion or removal of lamps, protection against contact with live parts of the lamp cap shall be ensured. (IEC 60335-2-80)		N/A
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N/A
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements or supporting parts		N/A
	For a single switching action obtained by a switching device, requirements as specified		N/A
	For appliances with a supply cord and without a switching device, the single switching action may be obtained by the withdrawal of the plug		N/A
8.1.4	Accessible part not considered live if:		--
	- safety extra-low a.c. voltage: peak value not exceeding 42.4 V		N/A
	- safety extra-low d.c. voltage: not exceeding 42.4 V		N/A
	- or separated from live parts by protective impedance		N/A
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0.7 mA		N/A
	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 $\mu$ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 $\mu$ C		N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		--
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	After the removal of detachable parts for the purposes of user maintenance, the basic insulation of internal wiring may be touched provided that it is electrically equivalent to the insulation of cords complying with IEC 60227 or IEC 60245. (IEC 60335-2-80)		N/A
<b>9</b>	<b>STARTING OF MOTOR-OPERATED APPLIANCES</b>		--
	Requirements and tests are specified in part 2 when necessary		N/A
<b>10</b>	<b>POWER INPUT AND CURRENT</b>		--
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1 .....	(see appended table)	P
	If the power input varies throughout the operating cycle and the maximum value of the power input exceeds, by a factor greater than two, the arithmetic mean value of the power input occurring during a representative period, the power input is the maximum value that is exceeded for more than 10 % of the representative period		N/A
	Otherwise the power input is the arithmetic mean value		N/A
	For electrode-type appliances, negative deviation not limited (IEC 60335-2-98/A1)		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value		P
	Appliances are tested with shutters or similar devices in the open position.(IEC 60335-2-80)		P
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2 .....	(see appended table)	N/A
	If the current varies throughout the operating cycle and the maximum value of the current exceeds, by a factor greater than two, the arithmetic mean value of the current occurring during a representative period, the current is the maximum value that is exceeded for more than 10 % of the representative period		N/A
	Otherwise the current is the arithmetic mean value		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	the rated current is related to the arithmetic mean value of the range		N/A
	Appliances are tested with shutters or similar devices in the open position. (IEC 60335-2-80)		N/A
<b>11</b>	<b>HEATING</b>		--
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described..... :	On floor	P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless	Fan motor, Synchronous motor, Pump	P
	the windings are non-uniform or it is difficult to make the necessary connections		N/A
11.4	Heating appliances operated under normal operation at 1.15 times rated power input (W) ..... :		N/A
	Electrode-type appliances are supplied at 1,06 times rated voltage (IEC 60335-2-98)		N/A
	If temperature rise limits are exceeded in appliances incorporating motors, transformers or electronic circuits, and the power input is lower than rated power input, the test is repeated with the appliance supplied at 1,06 times rated voltage. (IEC 60335-2-98)		N/A
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) ..... :	Both 0.94 and 1.06 times rated voltage tested, only the most severe result are recorded	P
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) ..... :		N/A
	Combined appliances are operated as heating appliances (IEC 60335-2-98)		N/A
11.7	Appliances are operated until steady conditions are established. (IEC 60335-2-80) & (IEC 60335-2-98)		P
11.8	Temperature rises monitored continuously and not exceeding the values in table 3 ..... :	(see appended table)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
	The temperature rise limits for appliances for tropical climates are reduced by 15 K. (IEC 60335-2-80)		P
	The temperature rise limits for fans marked with an ambient operating temperature are reduced by the difference between the marked value and 25 °C. (IEC 60335-2-80)		N/A
	The temperature rise limits of motors, transformers and components of electronic circuits, including parts directly influenced by them, may be exceeded when the appliance is operated at 1,15 times rated power input (IEC 60335-2-98)		N/A
<b>13</b>	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE</b>		--
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times the rated power input (W)..... :		N/A
	Motor-operated appliances and combined appliances supplied at 1.06 times the rated voltage (V)..... :	254,4V	P
	Protective impedance and radio interference filters disconnected before carrying out the tests		P
	Electrode-type appliances are supplied at 1,06 times rated voltage (IEC 60335-2-98)		N/A
13.2	For class 0, class II and class III appliances, and class II constructions, leakage current measured by means of the circuit described in figure 4 of IEC 60990		P
	For class 0I and class I appliances, a low impedance ammeter may be used		P
	Leakage current measurements ..... :	(see appended table)	P
	Electrode-type appliances, leakage current measured between metallic mesh placed in water vapour, 10 mm from outlet, and accessible metal parts including metal foil (IEC 60335-2-98/A1)		N/A
	Leakage current not exceed 0,25 mA (IEC 60335-2-98/A1)		P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4 ..... :	(see appended table)	P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	No breakdown during the tests		P
<b>14</b>	<b>TRANSIENT OVERVOLTAGES</b>		--
	Appliances withstand the transient over-voltages to which they may be subjected		N/A
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6 .....	(see appended table)	N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
<b>15</b>	<b>MOISTURE RESISTANCE</b>		--
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance		N/A
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N/A
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529.....	IPX0	N/A
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
	The outer part of fans to be installed in the external structure is subjected to subclause 14.2.4 (a) of IEC 60529:1989. The part of fans that is not mounted on the outside surface is protected against the spray water from the oscillating tube. (IEC 60335-2-80)		N/A
	The test is carried out with the appliance in the rest position and then in operation while supplied at rated voltage, shutters or similar devices being in the open position. (IEC 60335-2-80)		N/A
	Fans marked with the second numeral of the IP system are subjected to the appropriate test of IEC 60529 both at rest and in operation while supplied at rated voltage. (IEC 60335-2-80)		N/A
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		N/A
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N/A
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Detachable parts subjected to the relevant treatment with the main part		N/A
	However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed		N/A
15.2	Spillage of liquid does not affect the electrical insulation		P
	Spillage solution comprising water containing approximately 1 % NaCl and 0,6 % rinsing agent		P
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N/A
	Detachable parts are removed		P
	Overfilling test with additional amount of the solution, over a period of 1 min (I)..... :	0,75	P
	In case of doubt, the spillage test is carried out with the appliance deviating from the normal position of use by an angle not exceeding 5 ° (IEC 60335-2-98)		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances intended to be connected to the water mains are operated until maximum water level is reached. The inlet valve is held open and the filling continued for 15 min after the first evidence of overflow or (IEC 60335-2-98)		N/A
	until the inflow stops automatically (IEC 60335-2-98)		P
	The appliance withstands the electric strength test of 16.3		P
	No trace of water on insulation that can result in a reduction of clearances or creepage distances below values specified in clause 29		P
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet		P
	Reassembly of those parts that may have been removed		P
	The appliance withstands the tests of clause 16		P
<b>16</b>	<b>LEAKAGE CURRENT AND ELECTRIC STRENGTH</b>		--
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1.06 times rated voltage (V) .....	254,4	P
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ (V).....		N/A
	Leakage current measurements .....	(see appended table)	P
	Limit values doubled if:		--
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified .....	(see appended table)	P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
16.3	Electric strength tests according to table 7 .....	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified .....	(see appended table)	P
	No breakdown during the tests		P
<b>17</b>	<b>OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS</b>		--
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use.....	(see appended table)	N/A
	Appliance supplied with 1.06 or 0.94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V) .....		N/A
	Basic insulation is not short-circuited		N/A
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N/A
	Temperature of the winding not exceeding the value specified in table 8		N/A
	However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
<b>18</b>	<b>ENDURANCE</b>		--
	Requirements and tests are specified in part 2 when necessary		N/A
<b>19</b>	<b>ABNORMAL OPERATION</b>		--
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe .....	(see appended table)	P
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		N/A
	if the appliance also has a control that limit the temperature during clause 11 it is subjected to the test of 19.4, and		N/A
	if applicable, to the test of 19.5		N/A
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable	19.7	P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		P
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		P
	until steady conditions are established		N/A
	If a heating element or intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample		N/A
	If the control performs more than one function, only that aspect of the control under consideration is rendered inoperative. Other functions of the control may continue to operate normally.		N/A
	Fans incorporating shutters or similar devices operated by a control are also subjected to the test of 19.101 (IEC 60335-2-80)		P
19.2	Test of appliances with heating elements with restricted heat dissipation; test voltage (V), power input of 0.85 times rated power input (W) .....		N/A
	The container of electrode-type appliances is filled with a saturated solution of NaCl at 20 °C ± 5 °C, the appliance being supplied at rated voltage. NOTE 101 A solution is saturated when no more salt can be dissolved. (IEC60335-2-98)		N/A
19.3	Test of 19.2 repeated; test voltage (V), power input of 1.24 times rated power input (W) .....		N/A
	The test is not applicable to electrode-type appliances (IEC60335-2-98)		N/A
19.4	Test conditions as in clause 11, any control limiting the temperature during tests of clause 11 short-circuited		N/A
	Appliances are only filled with sufficient water to cover the heating elements (IEC60335-2-98)		N/A
	Fans are switched off (IEC60335-2-98)		N/A
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the sheath		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N/A
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N/A
	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures (V) .....		N/A
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque, or		P
	locking moving parts of other appliances		N/A
	Locked rotor, capacitors open-circuited one at a time		P
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	the capacitor is of class S2 or S3 of IEC 60252-1	S3	P
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed.....		N/A
	An electronic timer or programmer that operates to ensure compliance with the test before the maximum period under the conditions of Clause 11 is reached, is a protective electronic circuit		N/A
	Other appliances supplied with rated voltage for a period as specified .....	Thermal link in motor operated	P
	Winding temperatures not exceeding values specified in table 8 .....	(see appended table)	P
	Separate controls are mounted on a dull black-painted plywood board (IEC 60335-2-80)		N/A
	Approximately 50 % of the area of each ventilating opening is blocked. (IEC 60335-2-80)		N/A
	The temperature of windings shall not exceed the values specified in Table 8 and (IEC 60335-2-80)	(see appended table)	P
	The temperature rise of the board shall not exceed: (IEC 60335-2-80)		--
	– 50 K, for appliances with T marking; (IEC 60335-2-80)		N/A
	– 65 K, for other appliances. (IEC 60335-2-80)		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
19.8	Multi-phase motors operated at rated voltage with one phase disconnected		N/A
19.9	Not applicable. (IEC 60335-2-80)		N/A
19.10	Series motor operated at 1.3 times rated voltage for 1 min (V)..... :		N/A
	During the test, parts not being ejected from the appliance		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless		P
	they comply with the conditions specified in 19.11.1		N/A
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		N/A
	restarting does not result in a hazard		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		P
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		P
	During and after each test the following is checked:		--
	- the temperature of the windings do not exceed the values specified in table 8		P
	- the appliance complies with the conditions specified in 19.13		P
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		--
	- the base material of the printed circuit board withstands the test of Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		--

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/A
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage, duration of the tests as specified:		--
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		P
	b) open circuit at the terminals of any component		P
	c) short circuit of capacitors, unless		P
	they comply with IEC 60384-14	X2 capacitor	P
	d) short circuit of any two terminals of an electronic component, other than integrated circuits		P
	This fault condition is not applied between the two circuits of an optocoupler		N/A
	e) failure of triacs in the diode mode		P
	f) failure of microprocessors and integrated circuits		P
	g) failure of an electronic power switching device		P
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/A
19.11.3	If the appliance incorporates a protective electronic circuit that operates to ensure compliance with clause 19, the appliance is tested as specified		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		P
	a device that can be placed in the stand-by mode,		P
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		P
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		P
	Surge protective devices disconnected, unless		N/A
	They incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		P
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, at frequency ranges specified		P
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		P
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		P
	An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode		P
	An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling		N/A
	Earthed heating elements in class I appliances disconnected		N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		P
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11		P
	Appliances having a rated current exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-34		N/A
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		P
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		N/A
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A) .....	Tested > 10A, fused rated: 2A	P
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9.....	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		P
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in table 4:		--
	- basic insulation (V) .....	1000/1112,8*	P
	- supplementary insulation (V).....	1750/1862,8*	P
	- reinforced insulation (V).....	3000/3225,6*	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		P
.....	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		--
	- do not become operational, or		P
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		P
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		--
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited		N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
19.101	Fans incorporating shutters or similar devices that are operated automatically are supplied at rated voltage and operated with the shutters or similar devices held in the closed or open position, whichever is more unfavourable (IEC 60335-2-80)		P
<b>20</b>	<b>STABILITY AND MECHANICAL HAZARDS</b>		--
20.1	Appliances having adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		N/A
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N/A
	Portable pedestal fans having a height exceeding 1,7 m and a mass exceeding 10 kg are placed on a horizontal surface. A force of 40 N is applied to the appliance at a height of 1,5 m in the most unfavourable horizontal direction. NOTE 101 Suitable means can be used to prevent the appliance from sliding. (IEC 60335-2-80)	Less than 1,7m	N/A
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		P
	Protective enclosures, guards and similar parts are non-detachable, and		P
	have adequate mechanical strength		P
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		N/A
	Not possible to touch dangerous moving parts with the test probe described		P
20.101	Fan blades, other than those of fans for mounting at high level, shall be guarded unless their leading edges and tips are rounded with a radius of not less than 0,5 mm and: (IEC 60335-2-80)		P
	– they have a hardness less than D 60 Shore, or (IEC 60335-2-80)		N/A
	– they have a peripheral speed less than 15 m/s when the fan is supplied at rated voltage, or (IEC 60335-2-80)		N/A
	– the fan has a power output not exceeding 2 W when supplied at rated voltage. (IEC 60335-2-80)		N/A
20.102	There shall be no risk of entrapment or injury caused by movement of the oscillating head of pedestal fans or table fans. (IEC 60335-2-80)		P
	Unless the entrapment point is guarded so that it cannot be touched by test probe 18 of IEC 61032, the appliance is operated at rated voltage and test probe 18 is placed at the entrapment point across the width and height of its opening. (IEC 60335-2-80)		P
	If test probe 18 is touched by the moving part, it shall not be subjected to a force exceeding 15 N. (IEC 60335-2-80)		P
<b>21</b>	<b>MECHANICAL STRENGTH</b>		--
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J	(see appended table)	P
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances are also subjected to the test of 21.101. (IEC 60335-2-80)		P
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
21.101	Fan guards are subjected to a push and a pull force of 20 N applied along the axis of the fan motor. After the test, it shall not be possible to touch dangerous moving parts with a test probe that is similar to test probe B of IEC 61032, but having a circular stop face with a diameter of 50 mm instead of the non-circular face. (IEC 60335-2-80)		P
	The test probe is applied with a force not exceeding 5N. (IEC 60335-2-80)		P
21.102	Ceiling fans have adequate strength. (IEC 60335-2-80)		N/A
	Ceiling fans are mounted in accordance with the installation instructions. A load equal to four times the mass of the fan is suspended from the body of the fan for 1 min. A torque of 1 Nm is then applied to the fixed body of the fan for 1 min. The test is repeated with the torque applied in the reverse direction. (IEC 60335-2-80)		N/A
	The suspension system including any safety suspension system device shall not break and the fan shall not be damaged to such an extent that compliance with 8.1, 16.3 and Clause 29 is impaired. NOTE The intent is to test the parts of the ceiling fan and not the capability of the ceiling materials. (IEC 60335-2-80)		N/A
<b>22</b>	<b>CONSTRUCTION</b>		--
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled		N/A
	NOTE 101 The enclosure defined in IEC 60529 does not include guards for fan blades. (IEC 60335-2-80)		N/A
22.2	Stationary appliance: means to ensure all-pole disconnection from the supply being provided:		--
	- a supply cord fitted with a plug, or		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	- a switch complying with 24.3, or		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N/A
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Applied torque not exceeding 0.25 Nm		N/A
	Pull force of 50N to each pin after the appliance has been placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N/A
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A
22.5	No risk of electric shock when touching pins, for appliances having a capacitor with rated capacitance equal to or greater than 0,1 $\mu$ F, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V).....: 4V		P
	If compliance relies on the operation of an electronic circuit, the electromagnetic phenomena tests of 19.11.4.3 and 19.11.4.4 are applied		N/A
	The discharge test is then repeated three times, voltage not exceeding 34 V (V) .....		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of Class II appliances not affected if a hose ruptures or seal leaks		P
	In case of doubt, test as described		P
	Drain holes shall be at least 5 mm in diameter or 20 mm <sup>2</sup> in area with a minimum dimension of at least 3 mm (IEC60335-2-98)		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		P
	the substance has adequate insulating properties		P
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		P
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		P
	The 50 N force is not applied to clips used to fasten fan guards. (IEC 60335-2-80)		P
	Instead, a force of 15 N is applied in any direction to the clips in an attempt to release them. (IEC 60335-2-80)		P
	Tests as described		P
22.12	Handles, knobs etc. fixed in a reliable manner, if loosening result in a hazard		P
	Removing or fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible, if resulting in a hazard		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	A choking hazard does not apply to appliances for commercial use		N/A
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		P
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		P
	If the part is removed and can be contained within the small parts cylinder, it is considered to be a choking hazard		P
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		N/A
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts		N/A
	Cord reel tested with 6000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion		P
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N/A
	material used is non-corrosive, non-hygroscopic and non-combustible		N/A
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N/A
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		N/A
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water, separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Ceramic and similar porous material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts, or		P
	unearthed metal parts separated from live parts by basic insulation only		P
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		P
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		P
	Liquids may be heated using electrodes and may be in direct contact with their live parts(IEC60335-2-98)		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		P
	the shaft is not accessible when the part is removed		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances and cordless appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless		N/A
	they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		P
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		P
22.39	Lamp holders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		P
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N/A
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:		--
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.53	Class II appliances and class III appliances that incorporate functionally earthed parts have at least double insulation or reinforced insulation between live parts and the functionally earthed parts		N/A
22.54	Button cells and batteries designated R1 not accessible without the aid of a tool, unless		N/A
	the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously		N/A
22.55	Devices operated to stop the intended function of the appliance, if any, are be distinguished from other manual devices by means of shape, size, surface texture or position .....	Refer to photo	P
	The requirement concerning position does not preclude use of a push on push off switch		N/A
	An indication when the device has been operated is given by:		N/A
	– tactile feedback from the actuator or from the appliance, or		N/A
	– reduction in heat output; or		N/A
	– audible and visible feedback		P
22.56	Detachable power supply part provided with the part of class III construction		N/A
22.57	The properties of non-metallic materials do not degrade from exposure to UV-C radiation, as specified in Annex T		N/A
	This requirement does not apply to glass, ceramics or similar materials		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.101	Appliances having provision for attaching a luminaire incorporate appropriate terminals and internal wiring. The internal wiring associated with the luminaire shall have insulation at least equivalent to silicone rubber compound type IE2 complying with IEC 60245-3. This requirement is not applicable to fans incorporating a luminaire that cannot be replaced without breaking the appliance. (IEC 60335-2-80)		N/A
	The vapour outlet of appliances incorporating means for heating water be free from obstructions that could give rise to a significant pressure within container (IEC 60335-2-98)		N/A
	The container shall be vented to the atmosphere, the aperture being at least 5 mm in diameter or 20 mm <sup>2</sup> in area with minimum dimension of at least 3 mm (IEC 60335-2-98)		N/A
22.102	The ceiling fan shall be constructed so that a failure of the fixing device of the motor to the mounting rod could not give rise to risk of injury to the user or surroundings. (IEC 60335-2-80)		N/A
	Compliance is checked by the requirement and inspection or test of 22.102.1, 22.102.2, 22.102.3, 22.102.4 or 22.102.5, as appropriate for the design. After the test, the ceiling fan shall not be damaged to such an extent that compliance with Clause 8.1, 16.3, 29.1 and 29.2 are impaired. (IEC 60335-2-80)		N/A
	Appliances for wall mounting shall have reliable provision for fixing to a wall, independent of the connection to the water mains (IEC 60335-2-98)		N/A
22.102.1	The ceiling fan shall incorporate a device that disconnects the fan from the supply before the suspension system fails. An example of this construction is shown in Figure 101. (IEC 60335-2-80)		N/A
22.102.2	The ceiling fan shall be constructed so that the fan motor and blades do not fall more than 300 mm after failure of the suspension system and the fan shall be disconnected from the supply. An example of this construction is shown in Figure 103. (IEC 60335-2-80)		N/A
22.102.3	The ceiling fan shall be constructed so that the fan blades and motor are connected to the suspension system via a threaded down rod that is locked by means of one or more setscrews. An example of this construction is shown in Figure 104. (IEC 60335-2-80)		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
22.102.4	The ceiling fan shall be constructed so that an additional through bolt, lock washer and nut, or the like limits the distance of drop by no more than 75 mm in case of the suspension system failure. An example of this construction is shown in Figure 105. (IEC 60335-2-80)		N/A
22.102.5	The ceiling fan shall be constructed so that all components required to prevent the failure of the suspension system are treated or coated to resist corrosion. Any fixing bolts shall have a minimum diameter of 5 mm and a minimum tensile strength of 200 MPa. Any such bolts shall have provision to prevent them working loose due to vibration. An example of this construction is shown in Figure 106. (IEC 60335-2-80)		N/A
22.103	Electrode-type appliances shall be constructed to ensure that when filling aperture of the container is open, both electrodes are disconnected to provide all-pole disconnection under overvoltage category III conditions (IEC 60335-2-98)		N/A
	This requirement not apply to an appliance that requires withdrawal of an appliance connector in order to gain access to filling aperture (IEC 60335-2-98/A1)		N/A
22.104	Appliances intended to be connected to the water mains shall withstand the water pressure expected in normal use (IEC 60335-2-98)		N/A
	Compliance is checked by connection the appliance to a water supply having a pressure equal to twice the maximum inlet water pressure or 1,2 MPa, whichever is the higher, for a period of 5 min (IEC 60335-2-98)		N/A
	There shall be no leakage. (IEC 60335-2-98)		N/A
<b>23</b>	<b>INTERNAL WIRING</b>		--
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		N/A
	Wiring effectively prevented from coming into contact with moving parts		P
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		P
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	Fans with an oscillating mechanism are tested as follows. Fans are supplied at rated voltage and operated under normal operation, the angle of oscillation being the maximum allowed by the construction. The test is carried out for 100 000 cycles of oscillation. (IEC 60335-2-80)		P
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1000 V between live parts and accessible metal parts		P
	Not more than 10% of the strands of any conductor broken, and		P
	not more than 30% for wiring supplying circuits that consume no more than 15W		P
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		P
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
	For class II construction, the requirements for supplementary insulation and reinforced insulation apply,		P
	except that the sheath of a cord complying with IEC 60227 or IEC 60245 may provide supplementary insulation.		N/A
	A single layer of internal wiring insulation does not provide reinforced insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	be such that it can only be removed by breaking or cutting		P
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		P
<b>24</b>	<b>COMPONENTS</b>		--
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components.....: (see appended table)		P
	Motors not required to comply with IEC 60034-1, they are tested as part of the appliance		P
	Relays tested as part of the appliance, or		N/A
	alternatively acc. to IEC 60730-1, and meeting the additional requirements in IEC 60335-1		N/A
	The requirements of Clause 29 apply between live parts of components and accessible parts of the appliance		P
	Components can comply with the requirements for clearances and creepage distances for functional insulation in the relevant component standard		P
	30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections		P
	Components that have not been previously tested to comply with the IEC standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested to comply with the resistance to fire requirements in the IEC standard for the relevant component need not be retested provided the specified conditions are met		P
	If these conditions are not satisfied, the component is tested as part of the appliance.		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Power electronic converter circuits not required to comply with IEC 62477-1, they are tested as part of the appliance		N/A
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		N/A
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, comply with IEC 60384-14		P
	If the capacitors have to be tested, they are tested according to Annex F		N/A
24.1.2	Transformers in associated switch mode power supplies comply with Annex BB of IEC 61558-2-16		N/A
	Safety isolating transformers comply with IEC 61558-2-6		N/A
	If they have to be tested, they are tested according to Annex G		N/A
24.1.3	Switches comply with IEC 61058-1, the number of cycles of operation being at least 10 000		P
	If they have to be tested, they are tested according to Annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls comply with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		--
	- thermostats: .....	10 000	N/A
	- temperature limiters: .....	1 000	N/A
	- self-resetting thermal cut-outs: .....	300	N/A
	- voltage maintained non-self-resetting thermal cut-outs: .....	1 000	N/A
	- other non-self-resetting thermal cut-outs:	30	N/A
	- timers:.....	3 000	N/A
	- energy regulators:	10 000	N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
	Thermal cut-outs of the capillary type comply with the requirements for type 2.K controls in IEC 60730-2-9		N/A
24.1.5	Appliance couplers comply with IEC 60320-1		N/A
	However, for class II appliances classified higher than IPX0, the appliance couplers comply with IEC 60320-2-3		N/A
	Interconnection couplers comply with IEC 60320-2-2		N/A
24.1.6	Small lamp holders similar to E10 lampholders comply with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	The relevant standard for thermal links is IEC 60691	Thermal link in motor	P

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		N/A
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance .....		N/A
24.2	Appliances not fitted with:		--
	- switches, automatic controls or power supplies in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		P
	the solder has a melting point of at least 230 °C		N/A
	Appliances having a rated power input not exceeding 25 W may be fitted with a switch in the supply cord. (IEC 60335-2-80)		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly		P
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load	Motor running Capacitor rated 450V, tested: 344V	P
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V	Motor with basic insulation	N/A
	In addition, the motors comply with the requirements of Annex I		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		P
	One or more of the following conditions are to be met:		--
	- the capacitors are of class S2 or S3 according to IEC 60252-1	S3	P
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
24.101	Thermal cut-outs incorporated in duct fans in order to comply with Clause 19 shall not be self-resetting (IEC 60335-2-80)		N/A
	Thermal cut-outs incorporated in appliances for compliance with clause 19 shall not be self-resetting (IEC 60335-2-98)		N/A
<b>25</b>	<b>SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS</b>		--
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		--
	- supply cord fitted with a plug, the current rating and voltage rating of the plug being not less than the corresponding ratings of its associated appliance		N/A
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains		P

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		--
	- a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 (mm) .....		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		--
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment is allowed for portable fans (IEC 60335-2-80)		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		--
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		--
	light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg		N/A
	ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances	H05VVH2-F H05VV-F	P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		--
	heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg		N/A
	heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances		N/A
	- halogen-free, low smoke, thermoplastic insulated and sheathed		--
	- light duty halogen-free low smoke flexible cable (62821 IEC 101) for circular cable and (62821 IEC 101f) for flat cable		N/A
	- Ordinary duty halogen-free low smoke flexible cable (62821 IEC 102) for circular cable and (62821 IEC 102f) for flat cable		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm <sup>2</sup> ) .....	<2A, 2X0,75mm <sup>2</sup>	P
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
	In multi-phase appliances, the colour of the neutral conductor of the supply cord is blue.		N/A
	Where additional neutral conductors are provided in the supply cord:		--
	- other colours may be used for these additional neutral conductors;		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	- all of the neutral conductors and line conductors are identified by marking using the alpha numeric notation specified in IEC 60445		N/A
	- the supply cord is fitted to the appliance		N/A
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		P
25.13	Inlet openings so constructed as to prevent damage to the supply cord		P
	If it is not evident that the supply cord can be introduced without risk of damage, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N/A
	class 0, or		N/A
	a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing		P
	Flexing test, as described:		--
	- applied force (N) .....	5N	P
	- number of flexings .....	10 000	P
	The test does not result in:		--
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		P
	- breakage of more than 10% of the strands of any conductor		P
	- separation of the conductor from its terminal		P
	- loosening of any cord guard		P
	- damage to the cord or the cord guard		P
	- broken strands piercing the insulation and becoming accessible		P
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord:		--
	- fixed appliances: pull 100 N; torque (not on automatic cord reel) (Nm) .....		N/A
	- other appliances: values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm) .....	Max. 5,1kg, 100 N, 0,35 Nm	P
	Cord not damaged and max. 2 mm displacement of the cord	0,2 mm	P
25.16	Cord anchorages for type X attachments constructed and located so that:		--
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	Constructed so that the cord can only be fitted with the aid of a tool		N/A
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	The conductors of the supply cord for type Y and Z attachment insulated from accessible metal parts		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		--
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		--
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the supply cord is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		P
	- the thickness of the insulation may be reduced		P
	- for class I or class II appliance with class III construction, the cross sectional areas of the conductors need not comply with 25.8 if specified conditions are met		P
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		P
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A
<b>26</b>	<b>TERMINALS FOR EXTERNAL CONDUCTORS</b>		--
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N/A
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for the connection of cables to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		--
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm)..... :		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N/A
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm <sup>2</sup> ) ..... :		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		N/A
	conductors ends fitted with means suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For Class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A--
<b>27</b>	<b>PROVISION FOR EARTHING</b>		
27.1	Accessible metal parts of Class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		N/A
	Earthing terminals and earthing contacts not connected to the neutral terminal		N/A
	Class 0, II and III appliances have no provision for protective earthing	Class II	P
	Class II appliances and class III appliances can incorporate an earth for functional purposes		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		N/A
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm <sup>2</sup> , and		N/A
	- do not provide earthing continuity between different parts of the appliance, and		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	- conductors cannot be loosened without the aid of a tool		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
	The allowed travel of the live and neutral brushes due to wear shall be less than the allowed travel of the earth brush so that the earthing circuit is maintained even after the appliance ceases to operate due to live and neutral brush wear. (IEC 60335-2-80)		N/A
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		N/A
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		N/A
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N/A
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		N/A
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
	Resistance not exceeding 0,1 $\Omega$ at the specified low-resistance test ( $\Omega$ ).....:		N/A
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
	Requirements not applicable to class II appliances and class III appliances that incorporate an earth for functional purposes		N/A
<b>28</b>	<b>SCREWS AND CONNECTIONS</b>		--
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N/A
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		P
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		P
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in table 14.....:	(see appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	This requirement does not apply to electrical connections in circuits of appliances for which:		--
	30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		--
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
<b>29</b>	<b>CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION</b>		--
	Clearances, creepage distances and solid insulation withstand electrical stress		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), Annex J applies..... :		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation ..... :		N/A
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless ..... :	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		P
	However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		P
	For appliances intended for use at altitudes exceeding 2 000 m, the clearances in Table 16 is increased according to the relevant multiplier values in Table A.2 of IEC 60664-1		N/A
	Impulse voltage test is not applicable:		--
	- when the microenvironment is pollution degree 3, or		P
	- for basic insulation of class 0 and class 01 appliances, or		N/A
	- to appliances intended for use at altitudes exceeding 2 000 m		N/A
	Appliances are in overvoltage category II		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of table 16 or the impulse voltage test of clause 14 are applicable ..... :	(see appended table)	P

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		P
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16 .:	(see appended table)	P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage.....:	(see appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N/A
29.1.4	Clearances for functional insulation are the largest values determined from:		--
	- table 16 based on the rated impulse voltage.....:	(see appended table)	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		P
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		P
	Lacquered conductors of windings considered to be bare conductors		P
	However, clearances at crossover points are not measured		P
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		--
	- table 16 based on the rated impulse voltage.....:	Motor running capacitor	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		N/A
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree .....	(see appended table)	P
	Pollution degree 2 applies, unless		N/A
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		P
	The microenvironment is pollution degree 3 unless insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance. (IEC 60335-2-80)		P
	For electrode-type appliances, the microenvironment of the insulation supporting the electrodes is pollution degree 3 (IEC 60335-2-98)		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
29.2.1	Creepage distances of basic insulation not less than specified in table 17 .....	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17 .....		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14 .....		N/A
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in table 17, or.....	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable .....		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in table 17, or .....	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable .....		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18 .....	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18 .....		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		P
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		--
	- by measurement, in accordance with 29.3.1, or		P
	- by an electric strength test in accordance with 29.3.2, or		N/A
	- for insulation, other than single layer internal wiring insulation, by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N/A
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- by an assessment of the thermal quality of the material according to 29.3.3 combined with an electric strength test in accordance with 23.5, for each single layer internal wiring insulation touching each other, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation have a thickness of at least 1 mm		P
	Reinforced insulation have a thickness of at least 2 mm		P
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		N/A
	Supplementary insulation consist of at least 2 layers		N/A
	Reinforced insulation consist of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of clause 19 does not exceed the value specified in table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19 .....		N/A
<b>30</b>	<b>RESISTANCE TO HEAT AND FIRE</b>		--
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		P
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C) .....	(see appended table 30.1)	P
	Parts supporting live parts tested at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C) .....	(see appended table 30.1)	P

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C)..... :	(see appended table 30.1)	P
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		--
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		P
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		P
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		N/A
	- for unattended appliances, 30.2.3 applies		P
	For appliances for remote operation, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies	PCB	P
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550°C	(see appended table 30.2)	P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		P
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.2	Not applicable. (IEC 60335-2-80)&(IEC 60335-2-98)		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	The tests are not applicable to conditions as specified .....		N/A
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0,2 A during normal operation, and		P
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		P

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C	(see appended table 30.2)	P
	Glow-wire applied to an interposed shielding material, if relevant		P
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		P
30.2.3.2	Parts of non-metallic material supporting connections, and		P
	parts of non-metallic material within a distance of 3mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with appropriate severity level:	(see appended table 30.2)	P
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		P
	- 650 °C, for other connections		P
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		--
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	775 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	675 °C, for other connections		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		--
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		--
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		--
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of Annex E	(see appended table 30.2/30.2.4)	P
	Test not applicable to conditions as specified .....		N/A
<b>31</b>	<b>RESISTANCE TO RUSTING</b>		--
	Relevant ferrous parts adequately protected against rusting		P
<b>32</b>	<b>RADIATION, TOXICITY AND SIMILAR HAZARDS</b>		--
	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P
<b>A</b>	<b>ANNEX A (INFORMATIVE) ROUTINE TESTS</b>		--
	Description of routine tests to be carried out by the manufacturer		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
<b>B</b>	<b>ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES THAT ARE RECHARGED IN THE APPLIANCE</b>		--
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N/A
	This annex does not apply to battery chargers		N/A
	Three forms of construction covered:		--
	a) Appliance supplied directly from the supply mains or a renewable energy source, the battery charging circuitry and other supply unit circuitry incorporated within the appliance		N/A
	b) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source, via a detachable supply unit. The battery charging circuitry is incorporated within the part of the appliance containing the battery		N/A
	c) The part of the appliance incorporating the battery is supplied from the supply mains or a renewable energy source, via a detachable supply unit. The battery charging circuitry is incorporated within the detachable supply unit		N/A
3.1.9	Appliance operated under the following conditions:		--
	- the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N/A
	- the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N/A
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N/A
	- if the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N/A
5.B.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N/A
	Appliances intending to be supplied from a detachable supply unit marked with symbol IEC 60417-6181 and its type reference along with symbol ISO 7000-0790 (2004-01), or		N/A
	use only with <model designation> supply unit ... .....:		N/A
7.6	Symbols 60417-5005 and IEC 60417-5006		N/A
7.12	The instructions give information regarding charging		N/A
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N/A
	Details about how to remove batteries containing materials hazardous to the environment given		N/A
	Instructions for appliances containing non user-replaceable batteries state the substance of the following:		--
	This appliance contains batteries that are only replaceable by skilled persons		N/A
	Instructions for appliances containing non-replaceable batteries shall state the substance of the following:		N/A
	This appliance contains batteries that are non-replaceable		--
	WARNING: For the purposes of recharging the battery, only use the detachable supply unit provided with this appliance		N/A
	If the symbol for detachable supply unit is used, its meaning is explained		N/A
7.15	Markings placed on the part of the appliance connected to the supply mains		N/A
	The type reference of the detachable supply unit is placed in close proximity to the symbol		N/A
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N/A
	If the appliance can be operated without batteries, double or reinforced insulation required		N/A
11.7	The battery is charged for the period stated in the instructions or 24 h.....:		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
11.8	Temperature rise of the battery surface does not exceed the limit in the battery manufacturer's specification; measured (K); limit (K) .....		N/A
	If no limit specified, the temperature rise does not exceed 20 K; measured (K) .....		N/A
19.1	Appliances subjected to tests of 19.B.101, 19.B.102 and 19.B.103		N/A
19.10	Not applicable		N/A
19.B.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N/A
19.B.102	For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,		N/A
19.B.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N/A
19.13	The battery does not rupture or ignite		N/A
21.B.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength		N/A
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-31, the number of falls being:		--
	- 100, if the mass of the part does not exceed 250 g (g).....		N/A
	- 50, if the mass of the part exceeds 250 g .....		N/A
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N/A
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N/A
25.13	An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts		N/A
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A
	For other parts, 30.2.2 applies		N/A
<b>C</b>	<b>ANNEX C (NORMATIVE) AGEING TEST ON MOTORS</b>		--
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	The value of $p$ in Table C.1 is 2000 (IEC 60335-2-9)		N/A
<b>D</b>	<b>ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS</b>		--
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified		N/A
<b>E</b>	<b>ANNEX E (NORMATIVE) NEEDLE-FLAME TEST</b>		--
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		--
7	Severities		--
	The duration of application of the test flame is 30 s $\pm$ 1 s		P
9	Test procedure		--
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1		P
9.2	The first paragraph does not apply		N/A
	If possible, the flame is applied at least 10 mm from a corner		P
9.3	The test is carried out on one specimen		P
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		--
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s	PCB	P
<b>F</b>	<b>ANNEX F (NORMATIVE) CAPACITORS</b>		--
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		--
1.5	Terms and definitions		--
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		--

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Items a) and b) are applicable		N/A
3.4	Approval testing		--
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		--
	This subclause is applicable		N/A
4.2	Electrical tests		--
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		--
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		--
	This subclause is applicable		N/A
4.14	Endurance		--
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		--
	This subclause is applicable		N/A
4.18	Active flammability test		--
	This subclause is applicable		N/A
<b>G</b>	<b>ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS</b>		--
	The following modifications to this standard are applicable for safety isolating transformers:		--
7	Marking and instructions		--
7.1	Transformers for specific use marked with:		--
	-name, trademark or identification mark of the manufacturer or responsible vendor .....		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	-model or type reference..... :		N/A
17	Overload protection of transformers and associated circuits		--
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		--
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N/A
29	Clearances, creepage distances and solid insulation		--
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A
<b>H</b>	<b>ANNEX H (NORMATIVE) SWITCHES</b>		--
	Switches comply with the following clauses of IEC 61058-1, as modified below:		--
	The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		--
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		--
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		--
15.1	Not applicable		N/A
15.2	Not applicable		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
15.3	Applicable for full disconnection and micro-disconnection		N/A
17	Endurance		--
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335..... :		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K) ..... :		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		--
	Clause 20 is applicable to clearances across full disconnection and micro-disconnection		N/A
	It is also applicable to creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in Table 24		N/A
<b>I</b>	<b>ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE</b>		--
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		--
8	Protection against access to live parts		--
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		--

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		--
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N/A
19	Abnormal operation		--
19.1	The tests of 19.7 to 19.9 are not carried out		N/A
19.I.101	Appliance operated at rated voltage with each of the following fault conditions:		--
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		--
22.I.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A
<b>J</b>	<b>ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS</b>		--
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		--
5.7	Conditioning of the test specimens		--
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		--
	The test is carried out at -25 °C		N/A
5.7.3	Rapid change of temperature		--
	Severity 1 is specified		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
5.9	Additional tests		--
	This subclause is not applicable		N/A
<b>K</b>	<b>ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES</b>		--
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overtoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
<b>L</b>	<b>ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES</b>		--
	Information for the determination of clearances and creepage distances		P
<b>M</b>	<b>ANNEX M (NORMATIVE) POLLUTION DEGREE</b>		--
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		--
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		--

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		--
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		N/A
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
<b>N</b>	<b>ANNEX N (NORMATIVE) PROOF TRACKING TEST</b>		--
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		--
7	Test apparatus		--
7.3	Test solutions		--
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		--
10.1	Procedure		--
	The proof voltage is 100V, 175V, 400V or 600V ..:	175V	P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N/A
10.2	Report		--
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
<b>O</b>	<b>ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30</b>		--
	Description of tests for determination of resistance to heat and fire		P
<b>P</b>	<b>ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN TROPICAL CLIMATES</b>		--

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332		--
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a tropical climate and that are marked with symbol IEC 60417-6332, if liable to be connected to a supply mains that excludes the protective earthing conductor		--
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with symbol IEC 60417-6332		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N/A
	If symbol IEC 60417-6332 is used, its meaning is explained		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA):		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
<b>Q</b>	<b>ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS</b>		--
	Description of tests for appliances incorporating electronic circuits		P
<b>R</b>	<b>ANNEX R (NORMATIVE) SOFTWARE EVALUATION</b>		--
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		--

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		--
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		--
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		--
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		--
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N/A
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 and 22.115 is impaired (IEC 60335-2-9)		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 and 22.115 is impaired (IEC 60335-2-9)		N/A
R.3	Measures to avoid errors		--
R.3.1	General		--
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		--
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N/A
R.3.2	Specification		--
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		--

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N/A
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		--
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3.3	Software validation		--
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		--
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1 <sup>e</sup> – GENERAL FAULT/ERROR CONDITIONS						
Component <sup>a</sup>	Fault/error	Acceptable measures <sup>b, c</sup>	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1 CPU						N/A
1.1 Registers	Stuck at	Functional test, or periodic self-test using either: <ul style="list-style-type: none"> <li>- static memory test, or</li> <li>- word protection with single bit redundancy</li> </ul>	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			
1.2 VOID						N/A
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4. Memory						N/A
4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A

IEC 60335-2-80&98						
Clause	Requirement + Test		Result - Remark			Verdict
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.1 VOID						N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.1 VOID						N/A
6.2 VOID						N/A
6.3 Timing	Wrong point in time  Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator  Logical monitoring, or time-slot monitoring, or Scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.3  H.2.18.15 H.2.18.3  H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.1 VOID						N/A
7.2 Analog I/O 7.2.1 A/D and D/A-converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A

IEC 60335-2-80&98						
Clause	Requirement + Test			Result - Remark		Verdict
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						N/A
9 Custom chips <sup>d</sup> e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N/A
NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.						
<p>a) For fault/error assessment, some components are divided into their sub-functions.</p> <p>b) For each sub-function in the table, the Table R.2 measure will cover the software fault/error.</p> <p>c) Where more than one measure is given for a sub-function, these are alternatives.</p> <p>d) To be divided as necessary by the manufacturer into sub-functions.</p> <p>e) Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive.</p>						

<b>S</b>	<b>ANNEX S (NORMATIVE) BATTERY OPERATED APPLIANCES POWERED BY BATTERIES THAT ARE NON-RECHARGEABLE OR NOT RECHARGED IN THE APPLIANCE</b>			--
	The following modifications to this standard are applicable for battery-operated appliances where the batteries are either non-rechargeable (primary batteries), or			N/A
	rechargeable batteries (secondary batteries) that are not recharged in the appliance			N/A
5.8.1	If the supply terminals for the connection of the battery have no indication of polarity, the more unfavourable polarity is applied			N/A
5.S.101	Appliances intended for use with a battery box are tested with the battery box supplied with the appliance or with the battery box recommended in the instructions			N/A
5.S.102	Appliances are tested as motor-operated appliances.			N/A
7.1	Appliances marked with the battery voltage (V) and the polarity of the terminals, unless.....: .....			N/A
	the polarity is irrelevant			N/A
	Appliances also marked with:			--
	– name, trade mark or identification mark of the manufacturer or responsible vendor .....: .....			N/A
	– model or type reference .....: .....			N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	– IP number according to degree of protection against ingress of water, other than IPX0 .. .. .:		N/A
	– type reference of battery or batteries .....		N/A
	If relevant, the positive terminal is indicated by the symbol IEC 60417-5005 and the negative terminal by the symbol IEC 60417-5006		N/A
	If appliances use more than one battery, they are marked to indicate correct polarity connection of the batteries		N/A
7.6	Additional symbols		N/A
7.12	The instructions contain the following, as applicable:		--
	– the types of batteries that may be used .. .. .:		N/A
	– how to remove and insert the batteries		N/A
	– non-rechargeable batteries are not to be recharged		N/A
	– rechargeable batteries are to be removed from the appliance before being charged		N/A
	– different types of batteries or new and used batteries are not to be mixed		N/A
	– batteries are to be inserted with the correct polarity		N/A
	– exhausted batteries are to be removed from the appliance and safely disposed of		N/A
	– if the appliance is to be stored unused for a long period, the batteries are removed		N/A
	– the supply terminals are not to be short-circuited		N/A
11.5	Appliances are supplied with the most unfavourable supply voltage between		--
	– 0,55 and 1,0 times the battery voltage, if the appliance can be used with non-rechargeable batteries		N/A
	– 0,75 and 1,0 times battery voltage, if the appliance is designed for use with rechargeable batteries only		N/A
	The values specified in Table S.101 for the internal resistance per cell of the battery is taken into account		N/A
19.1	The tests are carried out with the battery fully charged unless otherwise specified		N/A
19.13	The battery does not rupture or ignite		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
19.S.101	Appliances are supplied with the voltage specified in 11.5. The supply terminals having an indication of polarity are connected to the opposite polarity, unless		N/A
	such a connection is unlikely to occur due to the construction of the appliance		N/A
19.S.102	For appliances with provision for multiple batteries, one or more of the batteries are reversed and the appliance is operated, if reversal of batteries is allowed by the construction		N/A
25.5	The flexible leads or flexible cord used to connect an external battery or battery box in is connected to the appliance by a type X attachment		N/A
25.13	This requirement is not applicable to the flexible leads or flexible cord connecting external batteries or a battery box with an appliance		N/A
25.S.101	Appliances have suitable means for connection of the battery. If the type of battery is marked on the appliance, the means of connection is suitable for this type of battery		N/A
26.5	Terminal devices in an appliance for the connection of the flexible leads or flexible cord connecting an external battery or battery box are so located or shielded that there is no risk of accidental connection between supply terminals		N/A
30.2.3.2	There is no battery in the area of the vertical cylinder used for the consequential needle flame test, unless		N/A
	the battery is shielded by a barrier that meets the needle flame test of Annex E, or		N/A
	that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
<b>T</b>	<b>ANNEX T (NORMATIVE) UV-C RADIATION EFFECT ON NON-METALLIC MATERIALS</b>		--
	Requirements for non-metallic materials subject to direct or reflected UV-C radiation exposure and whose mechanical and electrical properties are relied upon for compliance with the standard		N/A
	Does not apply to glass, ceramic and similar materials		N/A
	Tested as specified in ISO 4892-1 and ISO 4892-2, with the following modifications:		--
	Modifications to ISO 4892-1:		--
5.1.6	The UV-C emitter is a low pressure mercury lamp with a quartz envelope having a continuous spectral irradiance of 10 W/m <sup>2</sup> at 254 nm		N/A

<b>IEC 60335-2-80&amp;98</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Subclause 5.1.6.1 and Table 1 are not applicable		N/A
5.2.4	The black-panel temperature shall be 63 °C +/- 3 °C		N/A
5.3.1	Humidification of the chamber air is specified in part 2 when necessary		N/A
9	This clause is not applicable		N/A
	Modifications to ISO 4892-2:		--
7.1	At least three test specimens are tested		N/A
	Ten samples of internal wiring is tested		N/A
7.2	The specimens are attached to the specimen holders such that they are not subject to any stress		N/A
7.3	Apparatus prepared as specified		N/A
	The test specimens and, if used, the irradiance-measuring instrument are exposed for 1 000 h		N/A
7.4	If used, a radiometer is mounted and calibrated such that it measures the irradiance at the exposed surface of the test specimen		N/A
7.5	Material properties and test methods for parts providing mechanical support or impact resistance as specified in Table T.1		N/A
	Material properties and test method for electrical insulation of internal wiring as specified in Table T.2		N/A
8	This clause is not applicable		N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	dP (W, %)	Required dP (W, %)	Remark	
KFT2001D Supplied at 230V~ 50Hz	80	53,9	-32,6%	+20%	P	
KFT2407D Supplied at 230V~ 50Hz	80	54,2	-32,3%	+20%	P	
KFT2103D Supplied at 230V~ 50Hz	80	52,6	-34,3%	+20%	P	
KFT2605D Supplied at 230V~ 50Hz	80	57,6	-28,0%	+20%	P	
KFT2605D-S Supplied at 230V~ 50Hz	80	58,4	-27,0%	+20%	P	
KFT2001J Supplied at 230V~ 50Hz	80	51,1	-36,1%	+20%	P	
KFT2103J Supplied at 230V~ 50Hz	80	50,2	-37,3%	+20%	P	
KFT2407J Supplied at 230V~ 50Hz	80	51,5	-35,6%	+20%	P	
KFT2605J Supplied at 230V~ 50Hz	80	57,3	-28,4%	+20%	P	
Supplementary information: 40°C, 50-60Hz tested only the most unfavourable data recorded.						

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	$\Delta I$ (A, %)	Required $\Delta I$ (A, %)	Remark	
--	--	--	--	--	--	
Supplementary information:						

11.8	TABLE: Heating test, thermocouple measurements KFT2001D			P
	Test voltage (V) .....	254,4V		—
	Ambient (°C) .....	40		—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)	
Supply cord		4,5	35(50-15)	
Internal wire		5,3	35(50-15)	
Fan motor winding		48,8	70(85-15) (Class 130)	
Synchronous motor		32,5	65(80-15) (Class 120)	

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
Pump	9,2	65(80-15) (Class 120)	
Motor support	16,9	For Cl30.1	
Inside surface of enclosure	3,5	For Cl30.1	
Inside surface of control panel	3,1	For Cl30.1	
Base inside	4,1	For Cl30.1	
PCB	9,6	105(120-15)	
Ambient of X2 capacitor	7,8	60(75(T100)-15)	
Ambient of varistor	4,7	45(60(T85)-15)	
Motor capacitor	5,3	30(45(T70)-15)	
Control panel	1,6	45(60-15)	
Handle	1,8	45(60-15)	
Test corner	1,8	50(65-15)	
Enclosure	2,7	59(74-15)	
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, resistance method KFT2001D					P
	Test voltage (V) .....				254,4	—
	Ambient, t1 (°C).....				40	—
	Ambient, t2 (°C).....				40	—
Temperature rise of winding	R1 (Ω)	R2 (Ω)	dT (K)	Max. dT (K)	Insulation class	
Fan motor winding	1044,6	1265,8	58,1	80(95-15)	130	
Synchronous motor	10788	12412	41,3	75(90-15)	120	
Pump BZH-500	2712	2879	16,9	75(90-15)	120	
Supplementary information:						

11.8	TABLE: Heating test, thermocouple measurements KFT2407D			P	
	Test voltage (V) .....			254,4V	—
	Ambient (°C).....			40	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)			
Supply cord	4,2	35(50-15)			
Internal wire	5,1	35(50-15)			
Fan motor winding	45,2	70(85-15) (Class 130)			

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Synchronous motor	33,6	65(80-15) (Class 120)
	Pump	9,8	65(80-15) (Class 120)
	Motor support	13,5	For CI30.1
	Inside surface of enclosure	3,8	For CI30.1
	Inside surface of control panel	3,2	For CI30.1
	Base inside	4,5	For CI30.1
	PCB	11,1	105(120-15)
	Ambient of X2 capacitor	9,2	60(75(T100)-15)
	Ambient of varistor	6,1	45(60(T85)-15)
	Motor capacitor	7,1	30(45(T70)-15)
	Control panel	1,8	45(60-15)
	Handle	1,9	45(60-15)
	Test corner	2,8	50(65-15)
	Enclosure	3,2	59(74-15)
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, resistance method KFT2407D					P
	Test voltage (V) .....				254,4	—
	Ambient, t1 (°C).....				40	—
	Ambient, t2 (°C).....				40	—
	Temperature rise of winding	R1 (Ω)	R2 (Ω)	dT (K)	Max. dT (K)	Insulation class
	Fan motor winding	1487,7	1786,3	55,1	80(95-15)	130
	Synchronous motor	10788	12511	43,8	75(90-15)	120
	Pump BZH-300	6091	6508	18,8	75(90-15)	120
Supplementary information:						

11.8	TABLE: Heating test, thermocouple measurements KFT2103D			P	
	Test voltage (V) .....			254,4V	—
	Ambient (°C).....			40	—
	Thermocouple locations	Max. temperature rise measured, dT (K)		Max. temperature rise limit, dT (K)	
	Supply cord	3,7		35(50-15)	
	PCB	9,3		105(120-15)	

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict
	Ambient of X2 capacitor	8,2	60(75(T100)-15)
	Ambient of varistor	4,7	45(60(T85)-15)
	Test corner	1,7	50(65-15)
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, thermocouple measurements KFT2605D		P
	Test voltage (V) .....	254,4V	—
	Ambient (°C).....	40	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)	
Supply cord	3,3	35(50-15)	
PCB	9,1	105(120-15)	
Ambient of X2 capacitor	8,8	60(75(T100)-15)	
Ambient of varistor	4,8	45(60(T85)-15)	
Test corner	1,3	50(65-15)	
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, thermocouple measurements KFT2605D-S		P
	Test voltage (V) .....	254,4V	—
	Ambient (°C).....	40	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)	
Supply cord	3,7	35(50-15)	
PCB	9,5	105(120-15)	
Ambient of X2 capacitor	8,2	60(75(T100)-15)	
Ambient of varistor	4,4	45(60(T85)-15)	
Test corner	1,2	50(65-15)	
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, thermocouple measurements KFT2001J		P
	Test voltage (V) .....	254,4V	—
	Ambient (°C).....	40	—

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Supply cord	3,3	35(50-15)
Keyboard switch	5,6	15(T55-25-15)
push button switch	5,3	15(T55-25-15)
Test corner	1,2	50(65-15)
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded		

11.8	TABLE: Heating test, thermocouple measurements KFT2103J		P
	Test voltage (V) .....	254,4V	—
	Ambient (°C).....	40	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)	
Supply cord	3,5	35(50-15)	
Rotary switch	4,8	25(T65-25-15)	
push button switch	3,2	15(T55-25-15)	
Test corner	1,6	50(65-15)	
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, thermocouple measurements KFT2407J		P
	Test voltage (V) .....	254,4V	—
	Ambient (°C).....	40	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)	
Supply cord	3,8	35(50-15)	
Rotary switch	6,2	25(T65-25-15)	
push button switch	4,3	15(T55-25-15)	
Test corner	1,3	50(65-15)	
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded			

11.8	TABLE: Heating test, thermocouple measurements KFT2605J		P
	Test voltage (V) .....	254,4V	—
	Ambient (°C).....	40	—

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

Thermocouple locations	Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Supply cord	4,2	35(50-15)
Rotary switch	7,3	25(T65-25-15)
push button switch	5,6	15(T55-25-15)
Test corner	1,1	50(65-15)
Supplementary information: Test at 0,94Un and 1,06Un, but most unfavourable data recorded		

13.2	TABLE: Leakage current		P
	Heating appliances: 1,15 x rated input (W).....:	—	—
	Motor-operated and combined appliances: 1,06 x rated voltage (V).....:	1,06x240=254,4 V	—
Leakage current between		I (mA)	Max. allowed I (mA)
L/N and accessible parts		Max. 0,002	0,35 peak
Supplementary information:			

13.3	TABLE: Dielectric strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Reinforced insulation(L/N and accessible parts)		3000/ 3225,6*	No
Basic insulation (motor winding and motor core)		1000/ 1112,8*	No
Supplementary insulation(internal wire and accessible parts)		1750/ 1862,8*	No
Supplementary information: * for motor capacitor part 344V			

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
Supplementary information:						

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

16.2	TABLE: Leakage current		P
	Single phase appliances: 1,06 x rated voltage (V) .....:	1,06x240=254,4 V	—
	Three phase appliances 1,06 x rated voltage divided by $\sqrt{3}$ (V) .....	--	—
Leakage current between		I (mA)	Max. allowed I (mA)
L/N and accessible parts		0,016	0,25
Supplementary information:			

16.3	TABLE: Dielectric strength		P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Reinforced insulation(L/N and accessible parts)		3000/ 3225,6*	No
Basic insulation (motor winding and motor core)		1250/ 1362,8*	No
Supplementary insulation(internal wire and accessible parts)		1750/ 1862,8*	No
Supplementary information: * for motor capacitor part 344V			

17	TABLE: Overload protection		N/A
Thermocouple locations:		Max. temperature rise measured, $\Delta T$ (K)	Max. temperature rise limit, $\Delta T$ (K)
--		--	--
Supplementary information:			

17	TABLE: Overload protection, resistance method					N/A
	Test voltage (V)..... :				--	—
	Ambient, t1 (°C) .....				--	—
	Ambient, t2 (°C) .....				--	—
Temperature of winding:		R1 ( $\Omega$ )	R2 ( $\Omega$ )	$\Delta T$ (K)	T (°C)	Max. T (°C)
--		--	--	--	--	--
Supplementary information:						

19	Abnormal operation conditions		P
Operational characteristics		YES/NO	Operational conditions
Are there electronic circuits to control the appliance operation?		Yes	

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

Are there “off” or “stand-by” position?		Yes					
The unintended operation of the appliance results in dangerous malfunction?		No					
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2							N/A
19.3							N/A
19.4							N/A
19.5							N/A
19.6							N/A
19.7	P						P
19.8							N/A
19.9							N/A
19.10							N/A
19.11.2	P						P
19.11.4.8							N/A
19.10X	P						P
Supplementary information:							

19.7	TABLE: Abnormal operation, locked rotor/moving parts					P
	Test voltage (V)..... :	240, 50Hz			—	
	Ambient, t1 (°C) .....	22			—	
	Ambient, t2 (°C) .....	22			—	
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
Synchronous motor		10002	13818	97,9	119,9	165
Pump BZH-500		2514	2791	28,3	50,3	165
Pump BZH-300		5647	6185	24,4	46,4	165
Fan Motor winding KFT2001D		968,5	-	--	119,8	225
Fan Motor winding KFT2407D		1379,3	-	--	122,5	225
Supplementary information:						
Synchronous motor until steady condition established, only the most unfavourable data recorded.						
For fan motor thermal link in motor operated, capacitor short current are more unfavourable than capacitor open current.						

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

The thermal link in fan motor operated, so the resistance of motor could not be recorded.

19.9	TABLE: Abnormal operation, running overload					N/A
	Test voltage (V)..... :		--			—
	Ambient, t1 (°C) .....		--			—
	Ambient, t2 (°C) .....		--			—
Temperature of winding:	R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)	
--	--	--	--	--	--	--
Supplementary information:						

19.13	TABLE: Abnormal operation, temperature rises			P
Thermocouple locations:	Max. temperature rise measured, Δ T (K)	Max. temperature rise limit, Δ T (K)		
Supply cord	16,8	150		
Test corner	3,3	150		
Enclosure(inside)	15,7	Clause 30.1		
Control panel	7,8	Clause 30.1		
Motor support	29,5	Clause 30.1		
Base(inside)	6,8	Clause 30.1		
Synchronous motor	119.9 °C	165°C		
Pump BZH-500	50.3 °C	165°C		
Pump BZH-300	46.4 °C	165°C		
Fan Motor winding KFT2001D	119,8°C	225°C		
Fan Motor winding KFT2407D	122,5°C	225°C		
Supplementary information: thermal link in motor operated, capacitor short current are more unfavourable than capacitor open current. All models tested, only the most unfavourable data recorded.				

24.1	TABLE: Components				P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity
Plug	Cixi Chengzhe wire and cable Co., Ltd	CZ-102	250 V~, 16 A	DIN VDE 0620-2-1:2021 +A1:2023+ A2:2025	VDE 40059319

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Ningbo Chaoyu ElectricAppliance Co., Ltd.	CY02	250 V~, 16 A	DIN VDE 0620-2-1:2016+A1:2023	VDE 40036236
Alternative	Ningbo Qiaopu Electric Co., Ltd.	D02	250 V~, 16 A	DIN VDE 0620-2-1:2013	TUV R 50286269
Alternative	Ningbo Xuanhua Electric Co. Ltd.	XH02	250 V~, 16 A	DIN VDE 0620-2-1:2016 +A1:2023	VDE 40019997
Alternative	Anhui Dinatong Wire Co., Ltd.	DNT-12	250 V~, 16A	DIN VDE 0620-2-1:2021 +A1:2023+A2:2025	VDE 40024452
Alternative	Yuyao Zhongji Wires Co., Ltd.	A02	250 V~, 16 A	DIN VDE 0620-2-1:2016 +A1:2017	VDE 40052176
Alternative	Cixi Yelei Electron Co., Ltd.	YL-02	250 V~, 16 A	DIN VDE 0620-2-1:2021 +A1:2023+A2:2025	VDE 40053516
Alternative	Cixi Wanneng Electron Co.,Ltd.	WN103	250 V~, 16 A	DIN VDE 0620-2-1:2021 +A1:2023	VDE 40045177
Alternative	Ningbo Chengken Electric Appliance Co., Ltd.	ZK02	250 V~,16 A	DIN VDE 0620-2-1:2016+A1:2023	VDE 40046664
Alternative	Yuyao Siji Wire industry Co., Ltd.	SJ-1	250 V~,16 A	DIN VDE 0620-2-1:2021 +A1:2023+A2:2025	VDE 40002253
Alternative	Yuyao Zhongji Wire Co., Ltd.	A01	250 V~, 2,5A	EN 50075:1990	TUV R 50621205
Alternative	Cixi Chengzhe wire and cable Co., Ltd	CZ-103	250V~, 2,5 A	EN 50075:1990	VDE 40059032
Alternative	Ningbo Chaoyu ElectricAppliance Co., Ltd.	CY01	250V~, 2,5 A	EN 50075:1990	VDE 40037132
Alternative	Ningbo Qiaopu Electric Co., Ltd.	D01	250V~, 2,5 A	EN 50075:1990	TUV R 50286264
Alternative	Cixi Yelei Electron Co.,Ltd.	YL-01	250V~, 2,5 A	EN 50075:1990	VDE 40052376
Alternative	Ningbo Xuanshi Electronics Co., Ltd	JL-1	250V~, 2,5A	EN 50075:1990	VDE 40006707
Alternative	Ningbo JinTing Nuclear Cable Co., Ltd	FY001	250V~, 2,5A	EN 50075:1990	VDE 40036482
Alternative	Anhui Dinatong Wire Co.,Ltd	DNT-11	250V~, 2,5A	EN 50075:1990	VDE 40024367
Alternative	Ningbo Chengken Electric Appliance Co., Ltd.	ZK01	250V~, 2,5 A	EN 50075:1990	VDE 40046753

IEC 60335-2-80&98					
Clause	Requirement + Test		Result - Remark		Verdict
Alternative	Cixi Wanneng Electron Co.,Ltd.	WN104 WN105	250V~, 2,5 A	EN 50075:1990	DEKRA 2196910.01
Alternative	Yuyao Siji Wire industry Co., Ltd.	SJ-01	250V~, 2,5 A	EN 50075:1990	VDE 40040500
Plug for UK	Ningbo Qiaopu Electric Co., Ltd.	D09	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	ASTA* (930)
Alternative	CixiLujie Electric Appliance Co., Limited	LJ01; LJ01B	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	BSI* (KM69196)
Alternative	Shangyu Jintao Electron Co., Ltd.	JT006A	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	ASTA* (1120)
Alternative	Ningbo Xuanhua Electric Appliance Co., Ltd	XH031A, XH031B & XH031C	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	ASTA* (1118)
Alternative	Cixi Chengzhe wire and cable Co., Ltd	CZ-302	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	35-150630 REV.1
Alternative	Cixi Yelei Electron Co.,Ltd.	YL09	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	ASTA* (1429)
Alternative	Cixi Wanneng Electron Co.,Ltd.	WN401	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	35-106932 REV.3
Alternative	NingboChengken ElectricAppliance Co., Ltd.	ZK06	250 V~, 3, 6, 10, 13 A	BS 1363-1: 2016 +A1: 2018	ASTA* (1290)
The rating of BS fuse-links should be employed according to the table 2 of BS 1363-1:2016+A1:2018					
Plug for Korea	Cixi Yelei Electron Co., Ltd.	YK01	250 V~, 2.5A	K60884-1 (2015-07)	KC (SU04328-22001)
Alternative	Cixi Chengzhe wire and cable Co., Ltd	CZ-601	250 V~, 2.5A	KC60884-1 (2025-05)	KC (SU04428-25006)
Alternative	Yuyao Zhongji Wires Co., Ltd.	A01	250 V~, 2.5A	KC60884-1 (2025-05)	KC (SU04368-23001A)
Alternative	Cixi Wanneng Electron Co.,Ltd.	WN902	250 V~, 2,5A	KC60884-1 (2025-05)	KC (SU04173-24002)
Plug (for Italy)	Ningbo Qiaopu Electric Co., Ltd.	D07	250 V~, 10 A	CEI 23-50-II Ed.2007+V1:2008	IMQ* (CA02.01118)
Alternative	Ningbo Chengken Electrical Appliance Co., Ltd.	Y007	250 V~, 10 A	CEI 23-50-II Ed.2007+V1:2008	IMQ CA02.02713
Alternative	Cixi Wanneng Electron Co.,Ltd.	WN114	250 V~, 10 A	CEI 23-50-II Ed.2007+V1:2008	DEKRA 35-111011
Plug (for Brazil)	Ningbo Qiaopu Electric Co., Ltd.	D14	250V~, 10A	CEI 23-50	TUV 21.0524

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Cixi Cheng zhe wire and cable Co., Ltd	CZ-350	250V~, 10A	ABNT NBR NM 60884-1 NBR 14136	DEKRA 4926947.31
Alternative	Cixi Wanneng Electron Co.,Ltd.	WN601	250V~, 10A	ABNT NBR NM 60884-1 NBR 14136 IEC 60884-1	NCC 305073
Plug (for Swiss )	Anhui Dinatong Wire Co., Ltd.	DNT-81	250V~, 10A	SN 441011-1 SN 441011-2-1 IEC 60884-1	S+ 24.0615
Alternative	Ningbo Chengken Electrical Appliance Co., Ltd.	ZK04	250V~, 10A	SN 441011-1 SN 441011-2-1 IEC 60884-1	S+ 23.0231
Alternative	Cixi Chengzhe wire and cable Co., Ltd	CZ-104	250V~, 10A	SN 441011-1 SN 441011-2-1 IEC 60884-1	S+ 25.0421
Alternative	Cixi Wanneng Electron Co., Ltd.	WN112	250V~, 10A	SN 441011-1 SN 441011-2-1 IEC 60884-1	S+ 24.0513
Power cord	Cixi Chengzhe wire and cable Co., Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40058462
Alternative	CiXi Yelei Electron Co.,Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40052058
Alternative	Yuyao Zhongji Wires Co., Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40051631
Alternative	Cixi Wanneng Electron Co.,Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40044024
Alternative	Anhui Dinatong Wire Co.,Ltd	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40021216
Alternative	Ningbo Xuanhua Electric Co. Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40016531
Alternative	Ningbo Qiaopu Electric Co., Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	TUV R 50279805
Alternative	Ningbo Chengken ElectriaAppliance Co., Ltd	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40035111
Alternative	Ningbo Chaoyu ElectricAppliance Co., Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40034480
Alternative	Zhejiang Jinting Nuclear Cable Co.,Ltd.	H05VVH2-F H05VV-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40013419
Alternative	Yuyao Siji Wire industry Co., Ltd.	H05VV-F H05VVH2-F	2x 0,75mm <sup>2</sup>	EN 50525-2-11:2011	VDE 40001417

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative Korea	CiXi Yelei Electron Co.,Ltd.	H05VV-F H05VVH2-F	2x 0,75mm <sup>2</sup>	KC60227-1(2015-09), KC60227-2(2015-09), KC60227-5(2015-07)	SU01244-21002
(Alternative)	Cixi Chengzhe wire and cable Co., Ltd	H05VV-F H05VVH2-F	2x 0,75mm <sup>2</sup>	KC60227-1(2015-09), KC60227-2(2015-09), KC60227-5(2015-07)	KC SU01355-25002
(Alternative)	Cixi Wanneng Electron Co.,Ltd.	H05VV-F H05VVH2-F	2x 0,75mm <sup>2</sup>	KC60227-1(2011-12), KC60227-2(2011-12), KC60227-5(2011-12)	KC SU01112-14001A
Internal wire	Cixi Haosheng wire & cable Co., Ltd.	H05V-U; H05V-K	1x0,5mm <sup>2</sup>	EN 50525-2-31:2011	VDE 40021089
Alternative	CixiHongyu Electric ApplianceCo., Ltd.	H05V-U; H05V-K	1x0,5mm <sup>2</sup>	EN 50525-2-31:2011	VDE 40012841
Alternative	Ningbo Haoguang Electric Appliance Co., Ltd.	H05V-U; H05V-K	1x0,5mm <sup>2</sup>	EN 50525-2-31:2011	VDE 126062
Alternative	Shaoxing City Meitai Electric Wire Co., Ltd.	H05V-U; H05V-K	1x0,5mm <sup>2</sup>	EN 50525-2-31:2011	VDE 40044879
Alternative	Ningbo Mingsheng Electronic Co.,Ltd.	1015	600V,22AWG,24 AWG, 105 °C	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	UL (E255201)+tested with appliance
Alternative	Ningbo Haoguang Electric Appliance Co.,Ltd.	1015	600V,22AWG,24 AWG, 105 °C	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	UL*(E192545)+tested with appliance
Alternative	Foshan City Shunde District Beiiiao Qinglang Electrical Factory	1015	600V,22AWG,24 AWG, 105 °C	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	UL (E365204)+tested with appliance

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
PCB Only for KFT2001D KFT2103D KFT2407D KFT2605D KFT2605D-S	KINGBOARD LAMINATES HOLDINGS LTD	KB series	V-0, 130°C Min. Thickness: 1,6mm	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	Tested with appliance UL E123995
Alternative	Laizhou Pengzhou Electronic Co.,Ltd.	PZ-22F	94V-0 Min. Thickness: 1,6mm	EN 60695-10-2:2014 EN 60695-11-5:2017 EN 60695-11-10:2013	VDE* 40043981
Alternative	FUJIAN LIHAO ELECTRONIC TECHNOLOGY CO LTD	L-80	94V-0 130 °C Min.Thickness:1,5 mm	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	UL*/E193288 Tested with appliance
Alternative	MEIZHOU WEILIBANG ELECTRONIC TECHNOLOGY CO LTD	WLB8282- 22F	94V-0 130 °C Min.Thickness:1,5 mm	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	UL*/E354175 Tested with appliance
Alternative	Wuxi City Guangda Copper-clad Laminated Sheets Co., Ltd.	CEPCP(G)- 22F	Min. Thickness: 1,6mm	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	Tested with appliance
Alternative	Shandong Jinbao Electronics Co., Ltd.	XPC-ZD- 90F	94V-0 Min. Thickness: 1,6mm	EN 60695-11-10:2013	VDE 40032178
Alternative	Shandong Jinbao Tech- innovCorporation	CEM-1-ZD- 95(G)F	94V-0 Min. Thickness: 1,6mm	EN 60695-11-10:2013	VDE* 40047083
Fuse link on PCB for KFT2001D KFT2103D KFT2407D KFT2605D KFT2605D-S	Honghu Bluelight Electronic Co., Ltd	6ET	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40034107
Alternative	Shenzhen Lanson Electronics Co. Ltd.	SMT	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40012592

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	XC Electronics (Shen Zhen) Corp. Ltd.	5TE	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40029550
Alternative	Dongguan Reomax Electronics Technology Co., Ltd.	MTS	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40039420
Alternative	Dongguan Chevron Electronic Technology Co., Ltd.	SET	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40038565
Alternative	Dongguan LUOYI Electronics Technology Co., Ltd.	SAT	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40050512
Alternative	Dongguan Better Electronics Technology Co., Ltd	932	250V~, T 2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40033369
Alternative	Dongguan Reomax Electronics Technology Co., Ltd.	TBP	250V~,2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40032053
Alternative	Dongguan Better Electronics Technology Co., Ltd	332	250V~,2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	TUV J 50158950
Alternative	Dongguan Better Electronics Technology Co., Ltd	334	250V~,2A	EN 60127-1:2006 +A1:2011+A2:2015 EN 60127-3:2015 +A1:2020	VDE 40025428
X2 Capacitor Only for KFT2001D KFT2103D KFT2407D KFT2605D KFT2605D-S	Dong Guan Chengdong Electronic Technology Co., Ltd	MPX	AC275/300/305/3 10V, 0,1uF 40/110/56/B	EN 60384-14:2013 +A1:2016	VDE 40046845
Alternative	Dain Electronics Co., Ltd.	MPX	275 V~, 0,1μF, 40/110/21/C	EN IEC 60384- 14:2023	VDE 40018798

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative	Jiangsu Xinghua Huayu Electronics Co., Ltd.	MPX	275 V~, 0,1µF, 40/100/21	EN 60384-14:2013 +A1:2016	VDE 40022417
Alternative	Carli Electronics Co., Ltd.	MPX	275 V~, 0,1µF, 40/100/56/B	EN 60384-14:2013 +A1:2016	VDE 40008520
Alternative	Guangdong JURCC electronics Co.,Ltd.	MPX/MKP	275 V~, 0,1µF, 40/110/56/B	EN IEC 60384-14:2023	VDE 40034920
Alternative	Tenta Electric Industrial Co.Ltd	MEX	275V~, 0,1µF, 40/100/21	EN IEC 60384-14:2023	VDE 119119
Alternative	Guangdong Fengming Electronic Tech. Co., Ltd.	MKP	275V~0,1µF, 40/105/56	EN 60384-14:2013 +A1:2016	VDE 40025702
Varistor for KFT2001D KFT2103D KFT2407D KFT2605D KFT2605D-S	Hongzhi Enterprises Ltd.	HEL 7D471K	1500V~ T125	EN IEC 61051-1:2018 EN IEC 61051-2:2021	VDE 40037512
Alternative	BestBright Electronics Co. Ltd	7D471K	2500V~, 40/85/56	IEC 61051-1:2007 IEC 61051-2:1991 IEC 61051-2:1991/AMD1:2009 IEC 61051-2-2:1991	VDE 40005858
Alternative	Cerglass MFG Inc	7D471K	2500V~, 40/125/21	EN IEC 61051-1:2018 EN IEC 61051-2:2021	VDE 40028836
Alternative	Xiangtai Electronics (Shenzhen)Co., Ltd.	MYD-7D471K	2500V~, 40/085/56	IEC 61051-1:2007 IEC 61051-2:1991 IEC 61051-2:1991 IEC 61051-2:1991 /AMD1:2009	VDE 40041629
Alternative	JYH HSU (JEC)ELECTRONICS LTD	7D471K	2500V~ 40/125/21	IEC 61051-1:2007 IEC 61051-2:1991 IEC 61051-2-2:1991 IEC 61051-2:1991 /AMD1:2009	VDE 40044685

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Rotary switch Only for KFT2103J KFT2407J KFT2605J	Zhongshan Xiaolan Yongjiang Plastic Electrica Plant	GZS-5M	250V~,1 (1) A, T65,1E4	EN 61058-1:2002 +A2	TUV R 50154548
Alternative	Wenzhou Temeishi Electric Co.. Ltd	TMSX6-2 TMSX6-5	250V~,16(6)A, T125, 2E4 50Hz,	EN 61058-1:2002 +A2	TUV R 50321486
Alternative	Cixi Xinpu Ruiiu Electric appliances Manufactory	RX2	250V~,1 (1) A, T85,1E4	EN IEC 61058- 1:2018 EN 61058-1-1:2016	TUV SUD B 090051 0019
Alternative	Cixi Fuhai Weiming Electric Accessories Factory	XK2	1A 250V~T125, IE4	IEC 61058-1- 1:2016 IEC 61058-1:2016	CN53937
Keyboard switch Only for KFT2001J	Cixi Zhong Mao Electric Appliance Co., Ltd	KQ-4 KQ-4A	250V~;1A; 1E4; T55	EN 61058-1:2002 +A2	TUV R 50394639
Alternative	Cixi Xinpu Ruiju Electric Appliances Manufactory	RQ-01 RQ-02	250V~1(1)A,T55, 1E4	EN IEC 61058- 1:2018 EN 61058-1-1:2016	TUV B 090051 0007
Alternative	Zhongshan Yonglian Electrical Applianc es Co., Ltd.	KQ-153C KQ-183C KQ-184C	250V~;1(1)A;T85; 1E4.	EN 61058-1:2002 +A2	TUV R 09757121
Alternative	Zhong Shan MingDi Electric Appliance Co.. Ltd.	MQ183 MQ184	250V~;1A; T55; 1E4.	EN 61058-1:2002 +A2	TUV R 50244531
Alternative	Zhongshan Xiaolan YongjiangApplianceCo .. Ltd.	KQ-3 KQ-3A KQ-4 KQ-4A	250V~;1A;1E4; T55	EN 61058-1:2002 +A2	TUV R 50052866
push button switch Only for KFT2001J KFT2103J KFT2407J KFT2605J	Cixi City Shiqiao Qishan Electronic Meter Factory	S-117 S-117-1	250V~,10A,16 A, T55, 1E4	EN IEC 61058- 1:2018 EN 61058-1-1:2016	TUV B 106403 0001
Alternative	CixiXinpu Ruiju Electric Appliances Manufactory	RDC-18 RDC-1	250 V~ 1E4, T125 12 A,	EN IEC 61058- 1:2018 EN 61058-1-1:2016	TUV B 090051 0011
Pump Only for KFT2001J KFT2001D KFT2103J KFT2103D	Ningbo BONDRE Electronics Co., Ltd	BZH-500	220-240V~, 50/60Hz,10W, IPX8 Class 120	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	TUV R 50442726+ test with appliance

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Alternative Only for KFT2407J KFT2407D KFT2605J KFT2605D KFT2605D-S	Ningbo BONDRE Electronics Co., Ltd	BZH-300	220-240V~, 50/60Hz, 7W, IPX8 Class 120	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	TUV R 50442726+ test with appliance
Cord for pump	Cixi Yuantong Cable Appliance Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40052017)
(Alternative)	Ningbo Cheng ken Electric Appliance Co.,Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40035111)
(Alternative)	ShangyujintaoEle ctron Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40013419)
(Alternative)	Ningbo Yuxin Electrical Appliance Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40010786)
(Alternative)	Yuyao Zhongjian Electric Appliance Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40033849)
(Alternative)	Guangdong Yincheng Electric Appliance Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40018525)
(Alternative)	Yuyao Chunjiang Electrical Appliance Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40006554)
(Alternative)	Yuyao Fanghua Electronics Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40003585)
(Alternative)	Shaoxing City Meitai Electric Wire Co., Ltd.	H03VVH2-F	2x0,5mm <sup>2</sup>	EN 50525-2-11: 2011	VDE* (40045917)
Fan Motor Only for KFT2001J KFT2001D KFT2103J KFT2103D	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	YYHS-12-4	220-240V~, 50/60Hz, 12W, Class B	EN IEC 60335-2-80 IEC/EN 60335-2-98 IEC/EN 60335-1	Tested with appliance

IEC 60335-2-80&98					
Clause	Requirement + Test			Result - Remark	Verdict
Fan Motor Only for KFT2407J KFT2407D KFT2605J KFT2605D KFT2605D-S	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	YYHS-12-4	220-240V~, 50/60Hz, 12W, Class B	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	Tested with appliance
Thermal link of fan motor	ZHANGZHOU AUPO ELECTRONICS CO.,LTD	A4-F B4-F	250V~, 2A, Tf=130 °C	EN 60691:2016+ A1:2019	VDE 40008720
Alternative	Ningbo Jiangbei Dongzhen Electrical Appliance Factory	RF1	250V~, 15 A, Tf=130°C	EN 60691:2003	TUV R 50030469
Alternative	Ningbo JiangbeiDongzhe n Electrical Appliance Factory	RF2	250V~, 2 A, Tf=130°C	EN 60691:2003	TUV R 50030469
Alternative	Xiamen Set Electronics Co., Ltd.	K4	250V~, 2 A, Tf=130°C	EN 60691:2016+ A1:2019	VDE 40017055
Synchronous Motor	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	49TYJ	220-240V~ 50/60Hz; 4W; Class 120	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	tested with appliance
Motor running capacitor	Zhejiang Yuwang Electric Appliance Co., Ltd.	CBB61B	450 V~ 50 / 60 Hz; 40/70/21;SH S3;1,2µF	EN 60252-1: 2010	TUV R 50051386
Alternative	Guangdong Fengming Electronic Tech. Co., Ltd	CBB61-P2	450 V~50 / 60Hz; 40/70/21, P2, 1,2uF	EN 60252-1: 2010	TUV R 50163114
Crimp connector	Heavy Power Co.,Ltd.	CE2, CE5 CE2X, CE5X	150°C	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	UL (E113650) + tested with appliance
Alternative	Shengzhen Hongyu Electronics Co.,Ltd.	HY-CE2 HY-CE5	150°C	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	UL (E314734)+te sted with appliance
Alternative	JIANGXI GAOCHAO INDUSTRIAL CO LTD	CE2, CE5 CE2X, CE5X	GWT 850	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	Tested with appliance UL E494015
shell	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	ABS PP	Min.thickness:2,0 mm	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	Tested with appliance

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

Panel	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	ABS PC	Min.thickness:2,0 mm	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	Tested with appliance
Base	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	ABS PP	Min.thickness:2,0 mm	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	Tested with appliance
Knob key	ZhiYin(Ningbo) Electrical Appliance Co., Ltd.	ABS	Min.thickness:2,0 mm	EN IEC 60335-2- 80 IEC/EN 60335- 2-98 IEC/EN 60335-1	Tested with appliance
Supplementary information:					
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					
2) License available upon request					

28.1	TABLE: Threaded part torque test			N/A
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Supplementary information:				

29.1		TABLE: Clearances				P
Overvoltage category .....		II				—
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark
330	0,2* / 0,5 / 0,8**					N/A
500	0,2* / 0,5 / 0,8**					N/A
800	0,2* / 0,5 / 0,8**					N/A
1 500	0,5 / 0,8** / 1,0***					N/A
2 500	1,5 / <b>2,0***</b>	>2,6*	>2,6		>2,6	P
4 000	3,0 / <b>3,5***</b>			>2,6		P
6 000	5,5 / 6,0***					N/A
8 000	8,0 / 8,5***					N/A
10 000	11,0 / 11,5***					N/A

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

**Supplementary information:**

\*) For tracks on printed circuit boards if pollution degree 1 and 2

\*\*) For pollution degree 3

\*\*\*) If the construction is affected by wear, distortion, movement of the parts or during assembly

\*: 2,4mm for motor winding to motor core

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm)										
	Pollution degree										
	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	B**	S**	R**	Verdict
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—	N/A
≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—		N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4		—	—	N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—	N/A
125	0,56	1,5	2,1	3,0	3,8	4,2	4,8	—	—		N/A
250	0,56	1,25	1,8	2,5	3,2	3,6	<b>4,0</b>	>5,2	—	—	P
250	0,56	1,25	1,8	2,5	3,2	3,6	<b>4,0</b>	—	>5,2	—	P
250	1,12	2,5	3,6	5,0	6,4	7,2	<b>8,0</b>	—	—	>10,4	P
400	1,0	2,0	2,8	4,0	5,0	5,6	<b>6,3</b>	>8,2#	—	—	P
400	1,0	2,0	2,8	4,0	5,0	5,6	<b>6,3</b>	—	>8,2#	—	P
400	2,0	4,0	5,6	8,0	10,0	11,2	<b>12,6</b>	—	—	>16,4#	P
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A

IEC 60335-2-80&98											
Clause	Requirement + Test							Result - Remark			Verdict
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—		N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	N/A
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—		—	N/A
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		N/A

IEC 60335-2-80&98											
Clause	Requirement + Test							Result - Remark			Verdict

>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	N/A
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		N/A

**Supplementary information:**

\*) Material group IIIb is allowed if the working voltage does not exceed 50 V

\*\*) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation

\*: 2,4mm for motor winding to motor core

#: for motor capacitor part: 344V

29.2	TABLE: Creepage distances, functional insulation								P
Working voltage (V)	Creepage distance (mm)							Verdict / Remark	
	Pollution degree								
	1	2			3				
		Material group			Material group				
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*		
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	N/A	
50	0,16	0,56	0,8	1,1	1,4	1,6	1,8	N/A	
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	N/A	
250	0,42	1,0	1,4	2,0	2,5	2,8	<b>3,2</b>	P(>4,2mm)	
400	0,75	1,6	2,2	3,2	4,0	4,5	<b>5,0</b>	P(>6,5mm)	
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A	
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A	
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A	
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A	
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A	
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A	
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A	
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A	
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A	
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A	
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A	
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A	
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A	

IEC 60335-2-80&98			
Clause	Requirement + Test	Result - Remark	Verdict

>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A
----------------------	------	------	------	-------	-------	-------	-------	-----

**Supplementary information:**

**\*) Material group IIIb is allowed if the working voltage does not exceed 50 V**

**#: for motor capacitor part: 344V**

30.1	TABLE: Ball Pressure Test of Thermoplastics				P
Allowed impression diameter (mm) .....				2,0	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)		Impression diameter (mm)	
Plastic enclosure	Refer to 24.1	75		1,1	
Motor support	Refer to 24.1	75		1,2	
Control panel	Refer to 24.1	125		1,4	
Base enclosure	Refer to 24.1	75		1,1	
PCB	Refer to 24.1	125		0,3	
Supplementary information:					

30.2	TABLE: Resistance to heat and fire – Glow wire tests						P	
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
Plastic enclosure	Refer to 24.1	X						P
Motor support	Refer to 24.1	X						P
Base enclosure	Refer to 24.1	X						P
Control panel	Refer to 24.1		X	X				P
Motor running capacitor	Refer to 24.1				0	0	X	P
Pump	Refer to 24.1				0	0	X	P
X2 capacitor	Refer to 24.1				0	0	X	P
Varistor	Refer to 24.1				0	0	X	P
Wire connector	Refer to 24.1				0	0	X	P
Rotary Switch	Refer to 24.1				0	0	X	P

IEC 60335-2-80&98								
Clause	Requirement + Test	Result - Remark						Verdict
PUSH-Button Switch	Refer to 24.1				0	0	X	P
Heating shrinkable tube	Refer to 24.1				0	0	X	P
Sleeve	Refer to 24.1				0	0	X	P
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
--	--	--	--	--	--	--	--	N/A
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No) .....								Yes
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No) .....								N/A
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)? .....								N/A
Ignition of the specified layer placed underneath the test specimen (Yes/No) .....								N/A
Supplementary information: - 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF - The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances								


30.2/30.4	TABLE: Needle- flame test (NFT)					P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
PCB	--	30	Yes	0	P	
Supplementary information: - NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1 - NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0						

Appendix 1: Photo of appliance

KFT2001D




KFT2001J

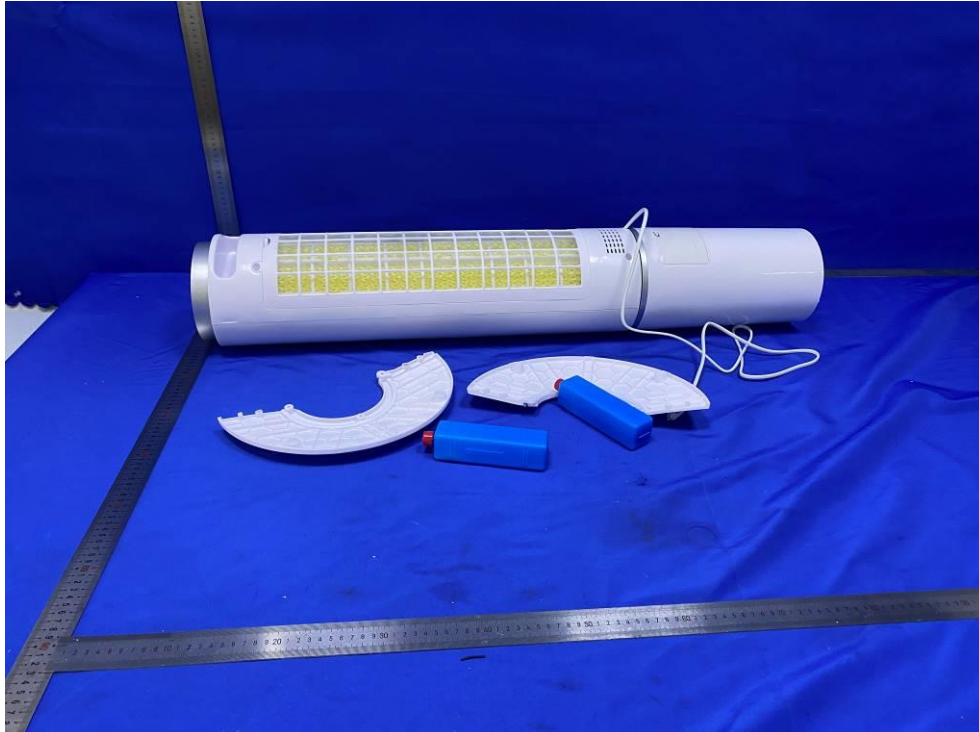


KFT2001J, KFT2001D




KFT2001J, KFT2001D

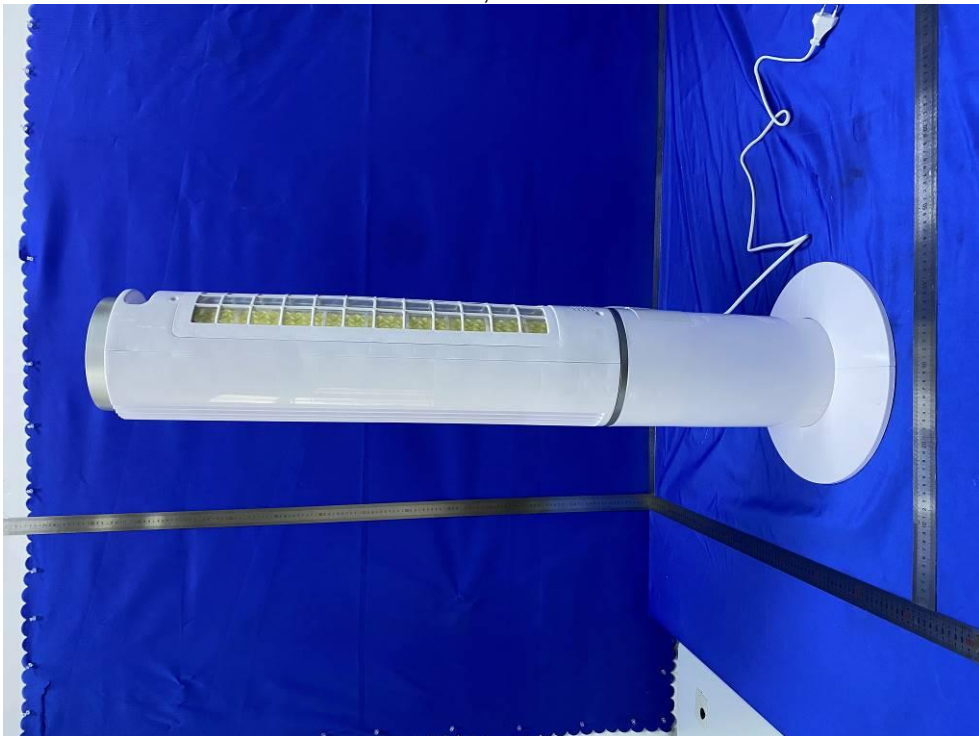


KFT2001J, KFT2001D

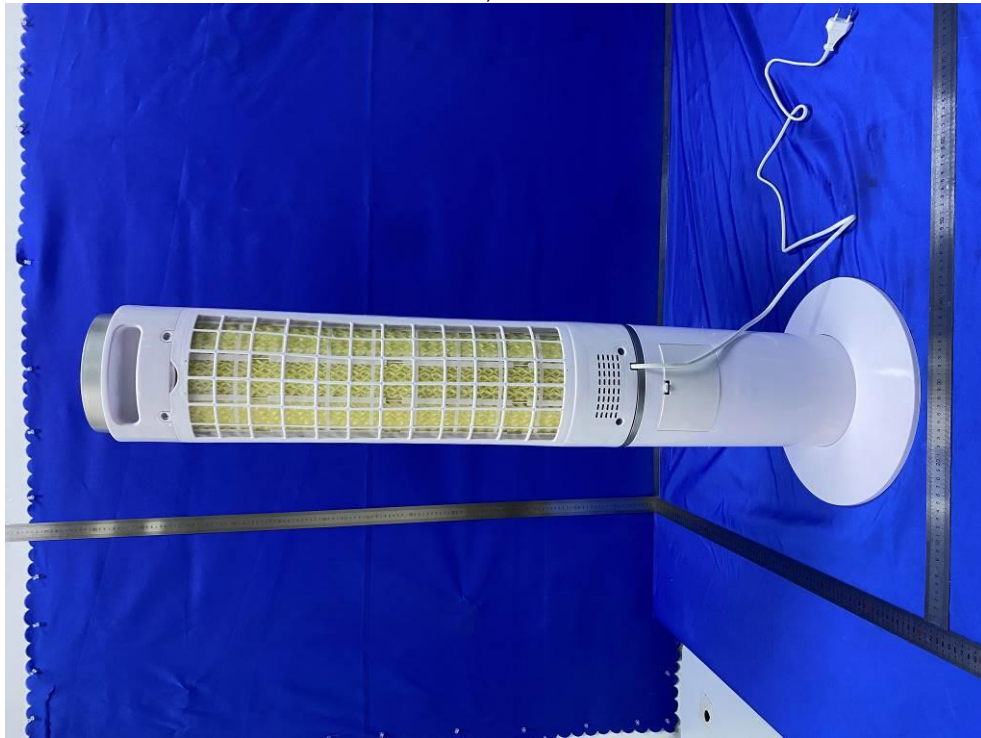


KFT2001J, KFT2001D

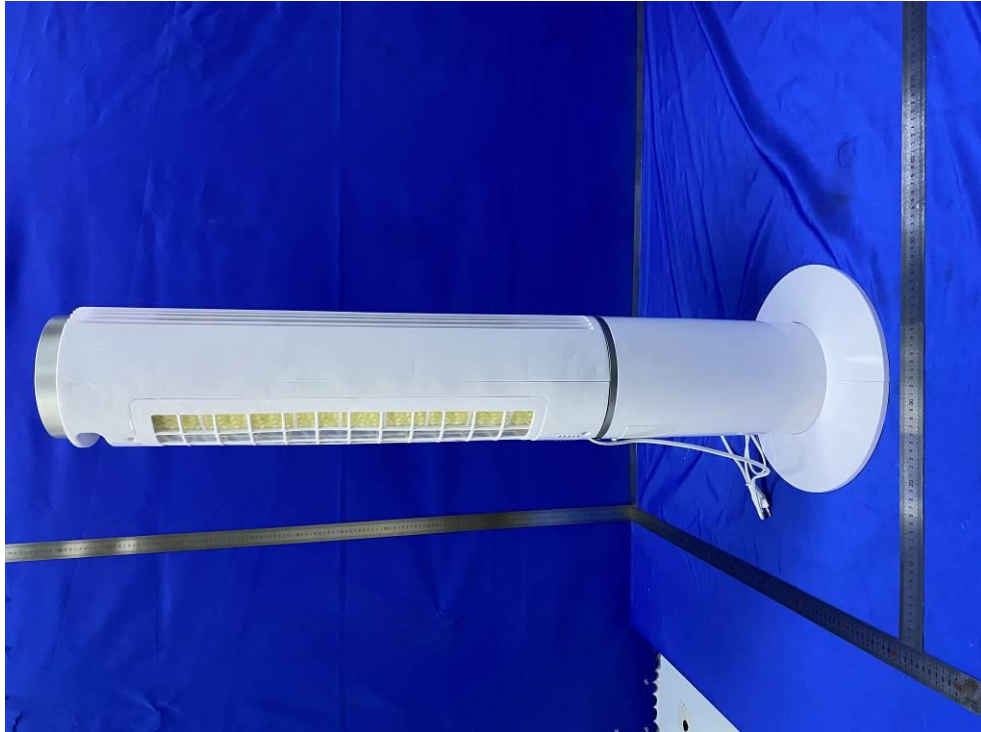

KFT2001J, KFT2001D

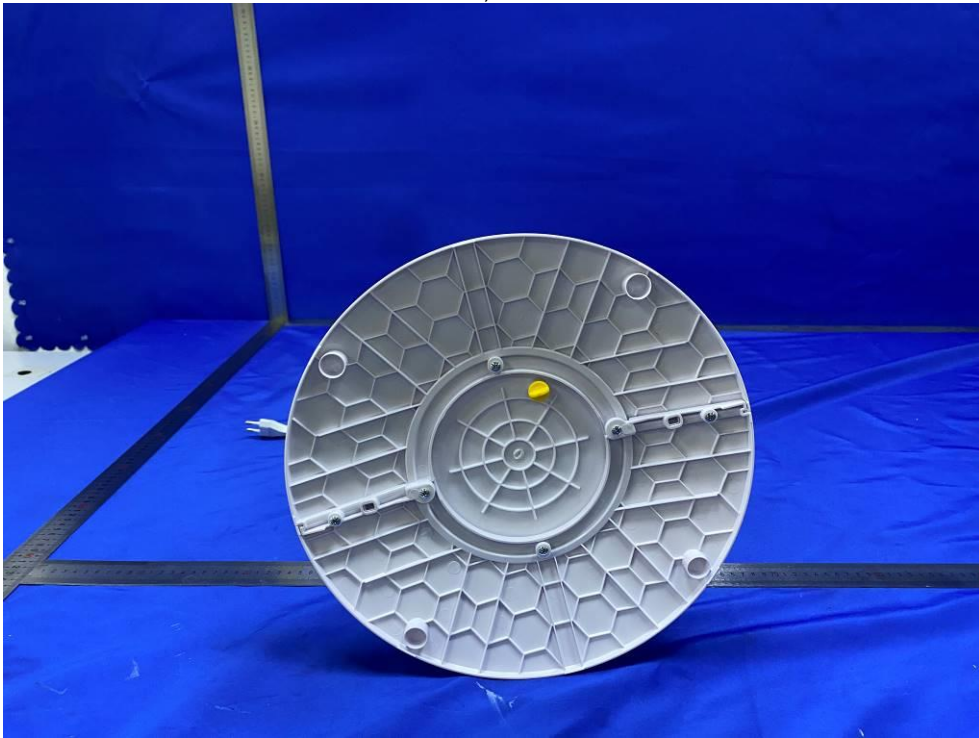


KFT2001J, KFT2001D

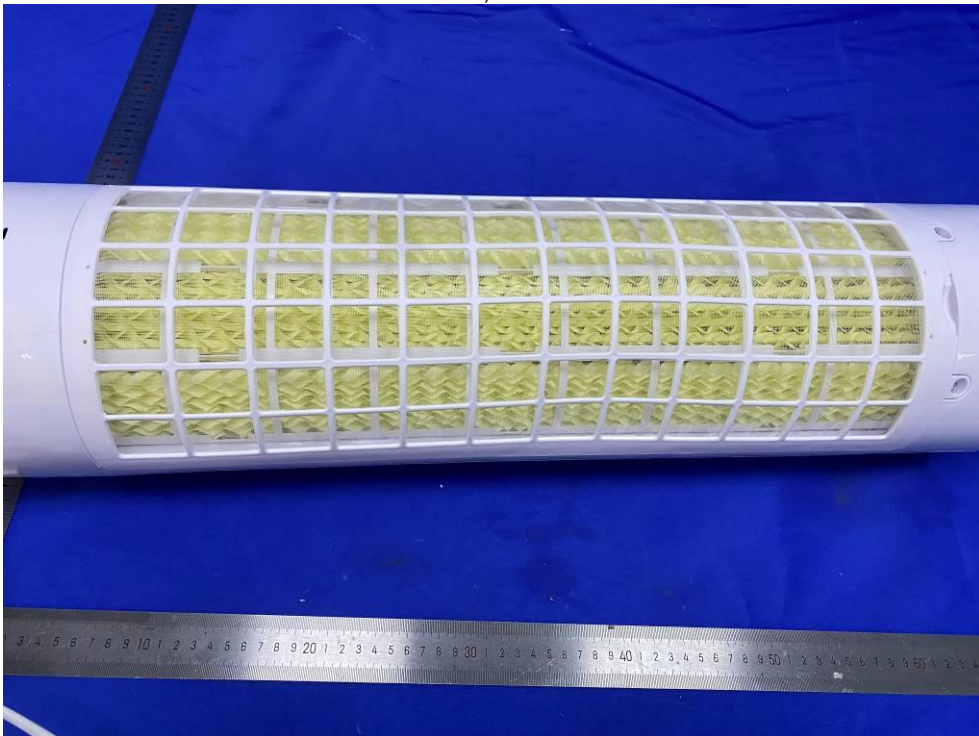


KFT2001J, KFT2001D




KFT2001J

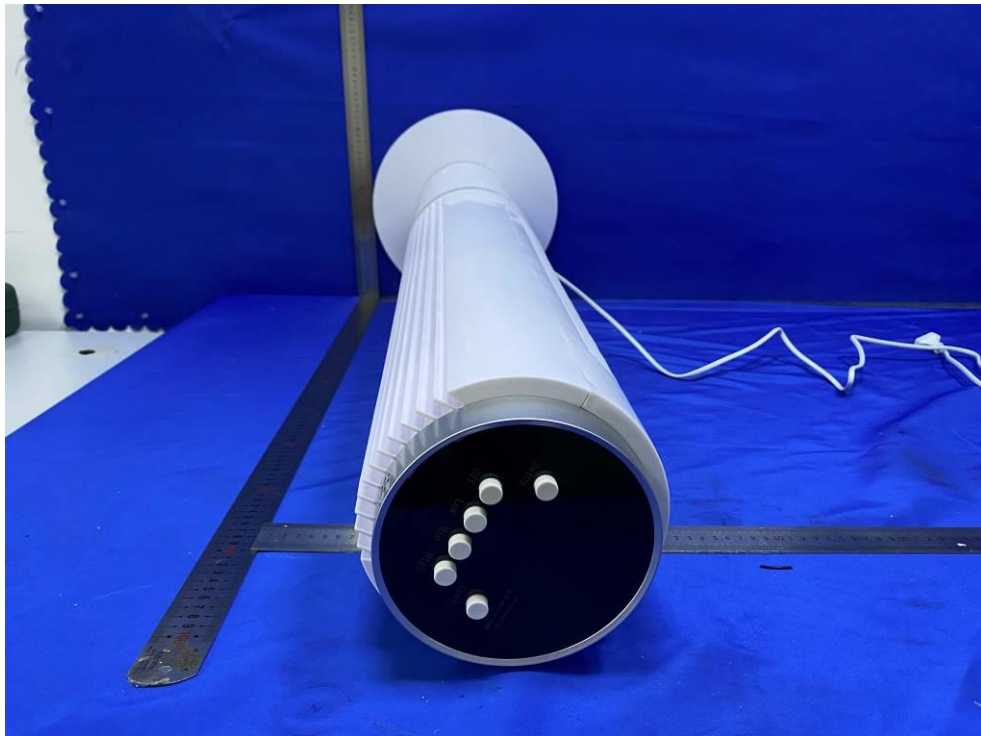


KFT2001J

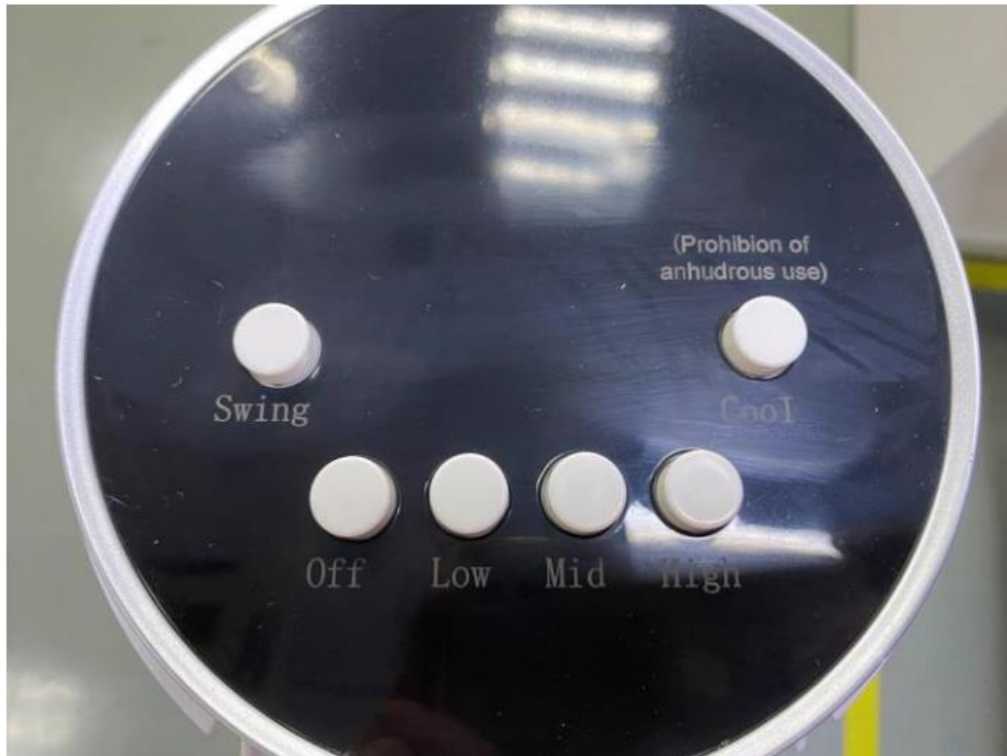

KFT2001D

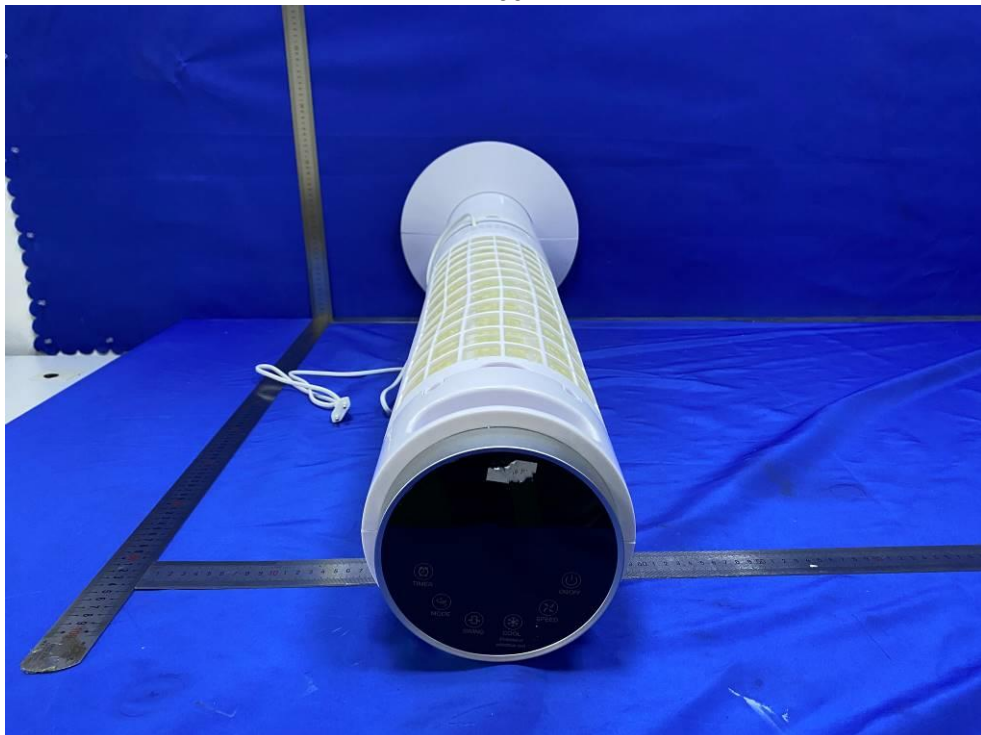

KFT2001D

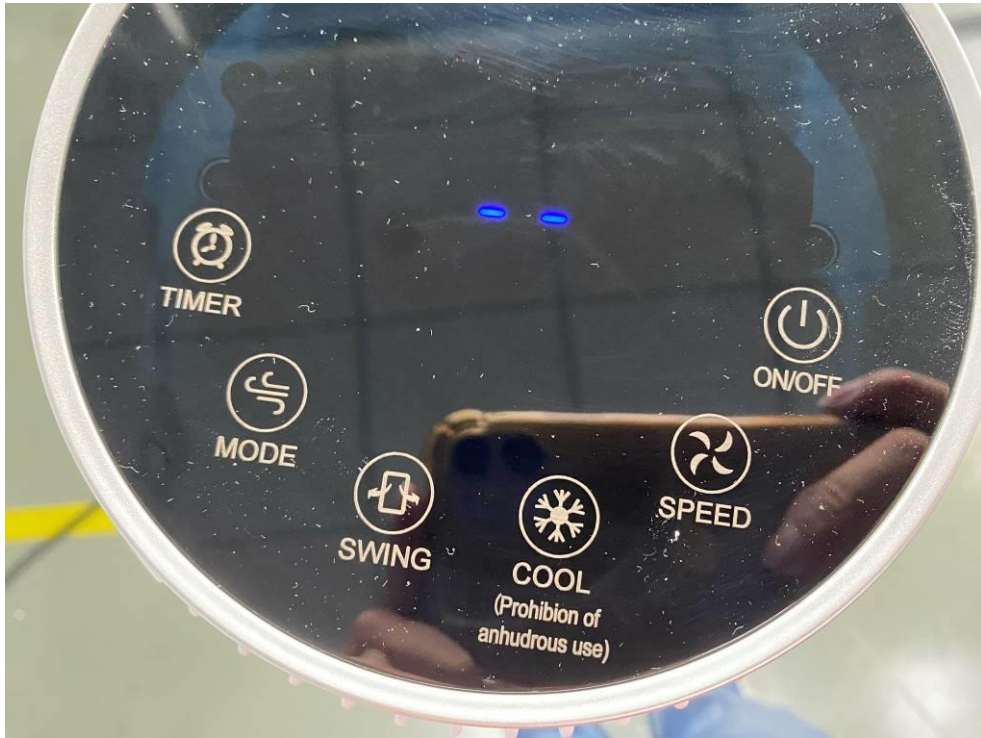

KFT2001D




KFT2001D




KFT2001J, KFT2001D



KFT2001D

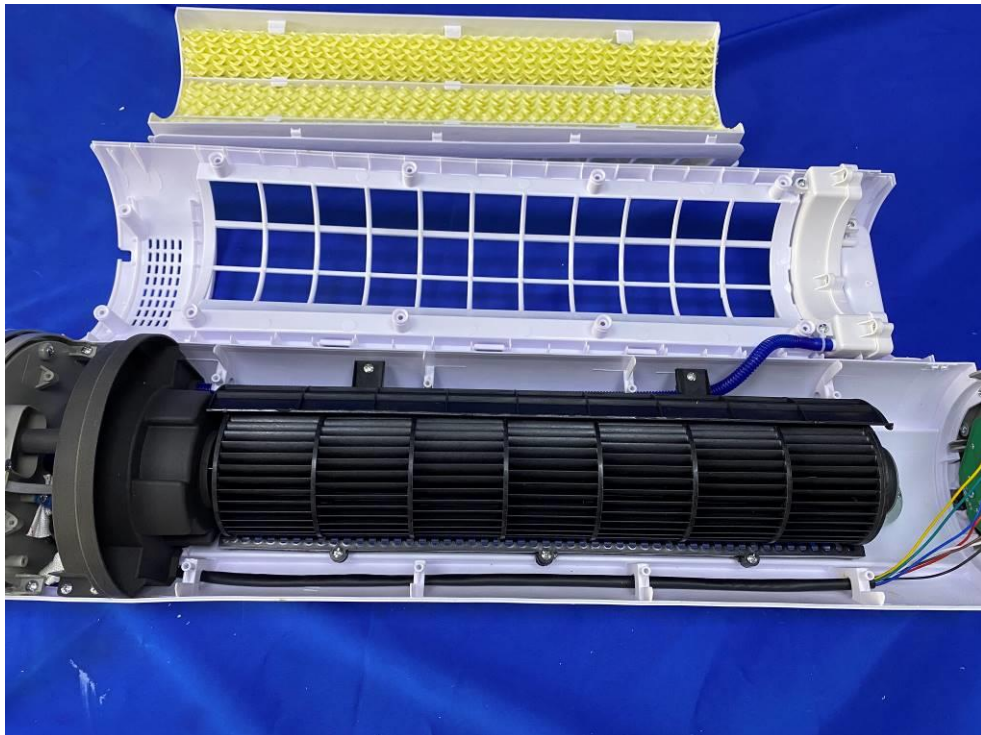


KFT2001D

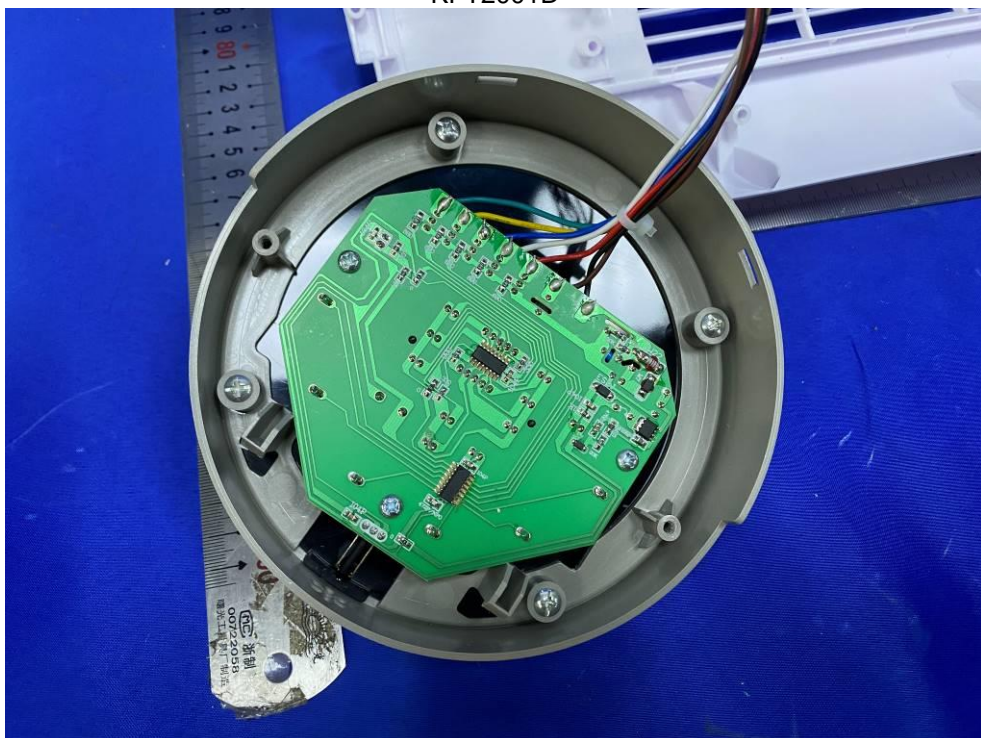





KFT2001J

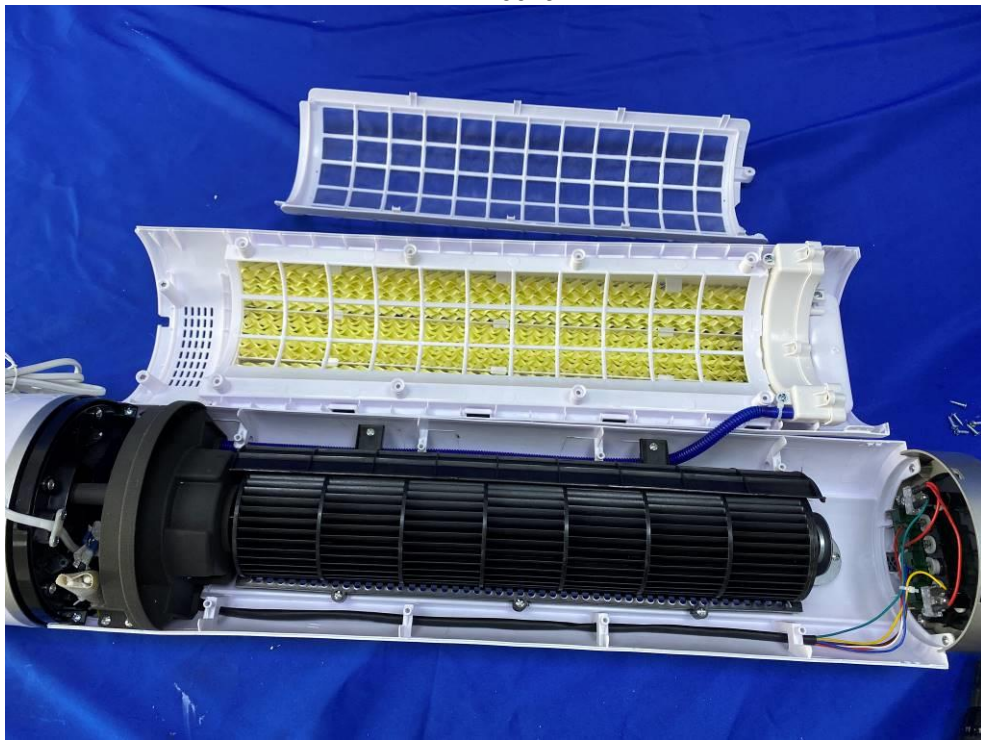


KFT2001J

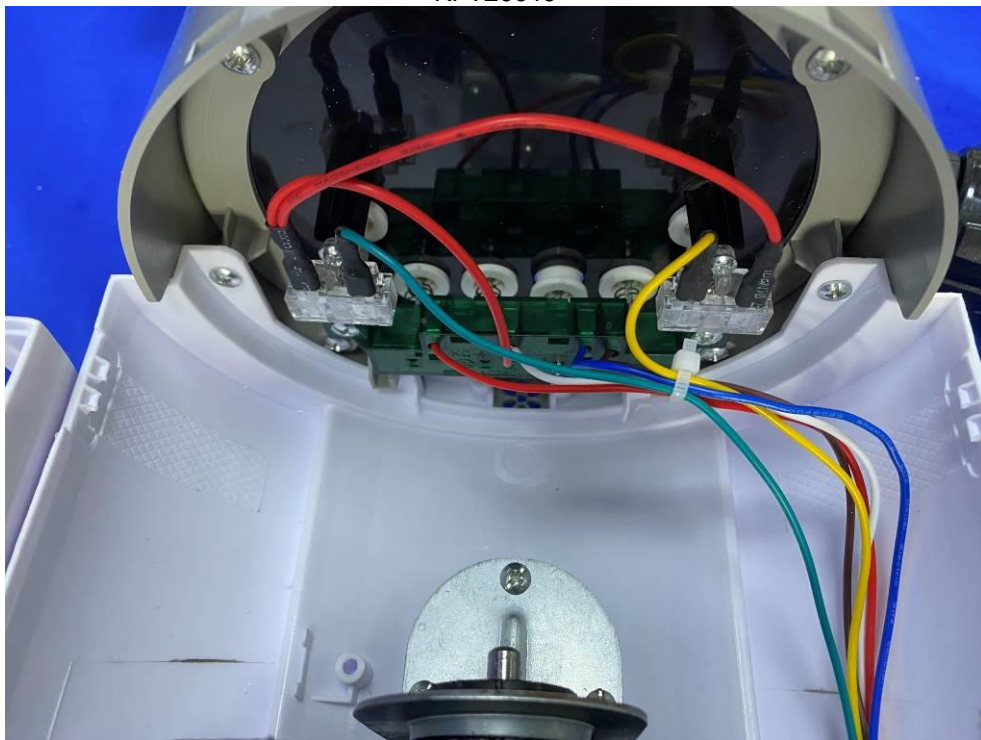


KFT2001J

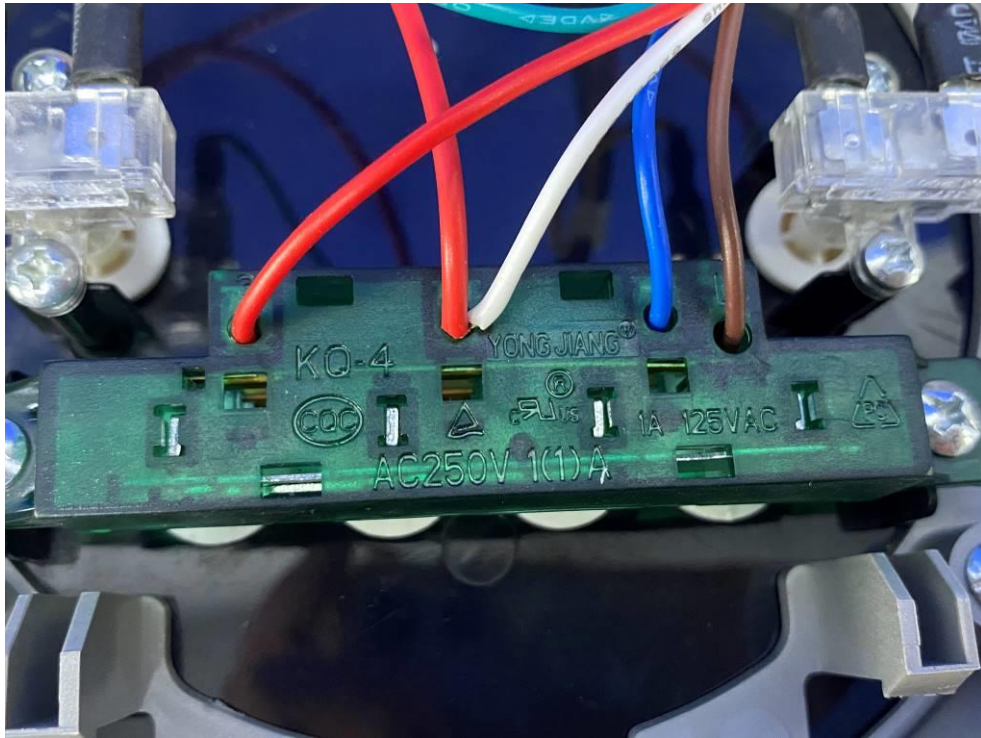

KFT2001J, KFT2001D

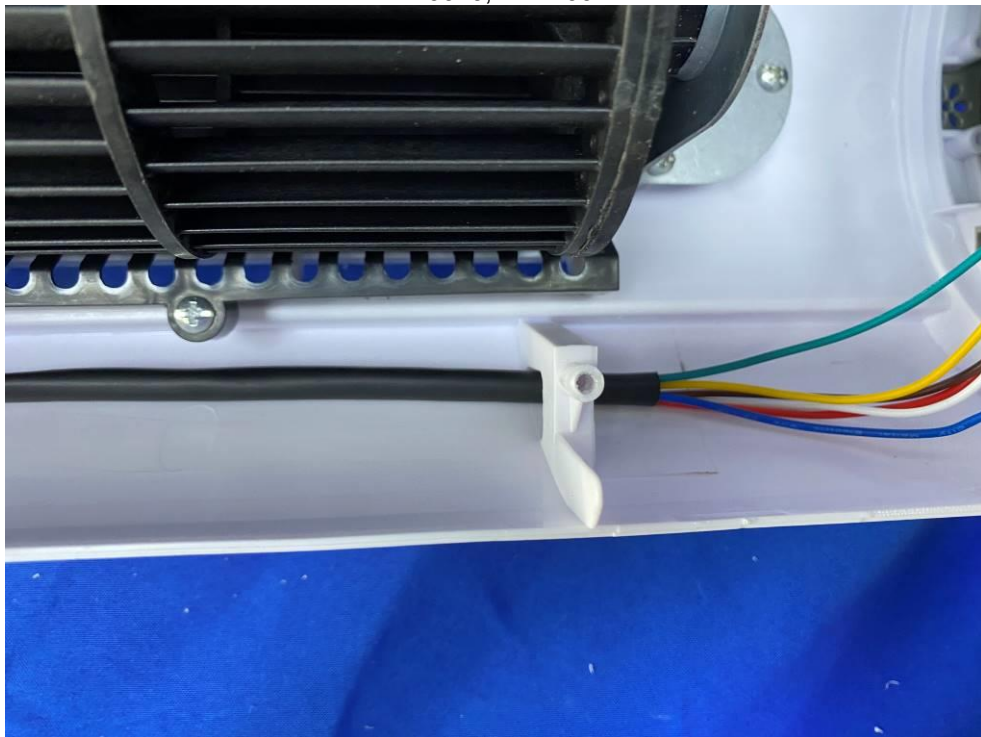

KFT2001J, KFT2001D

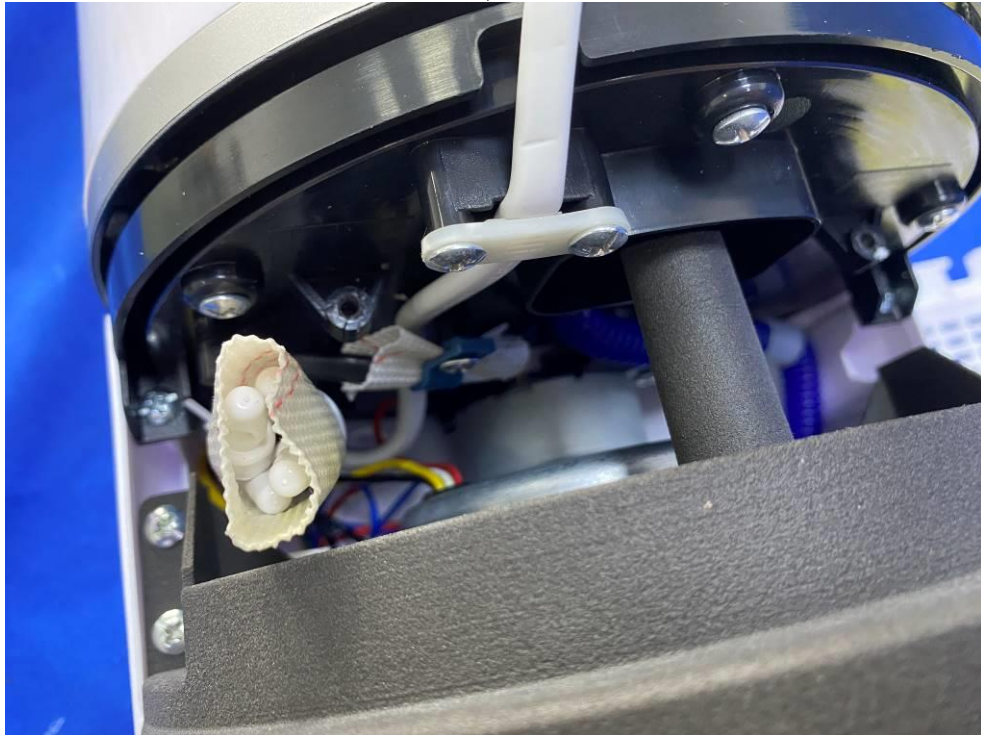


KFT2001J, KFT2001D




KFT2001J, KFT2001D



KFT2001J, KFT2001D

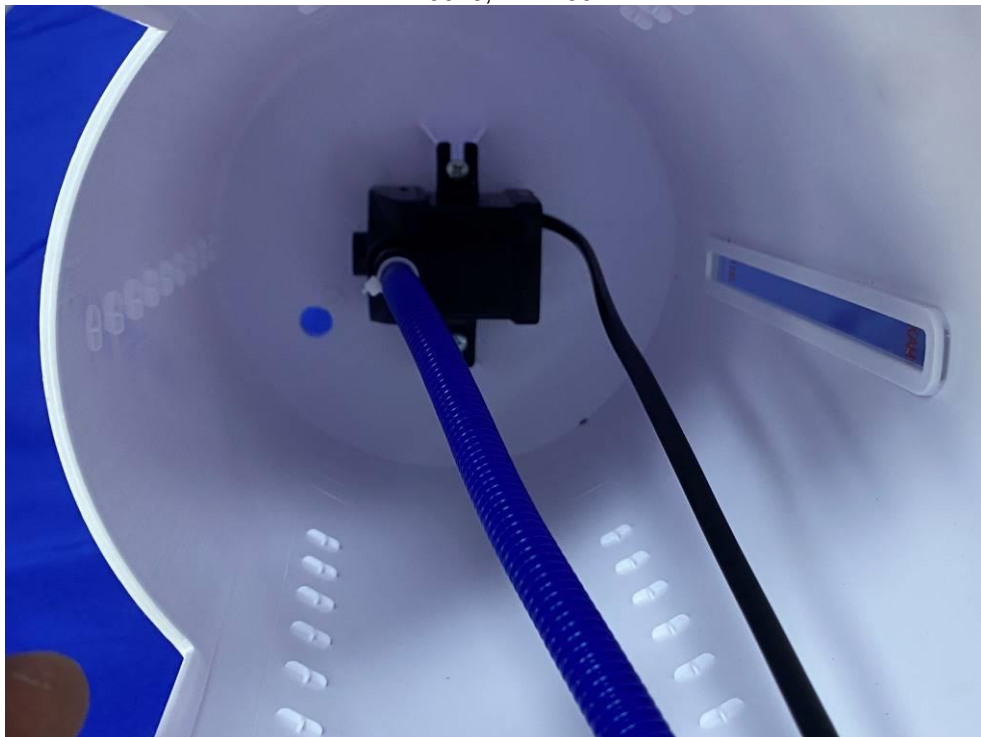


KFT2103J, KFT2103D

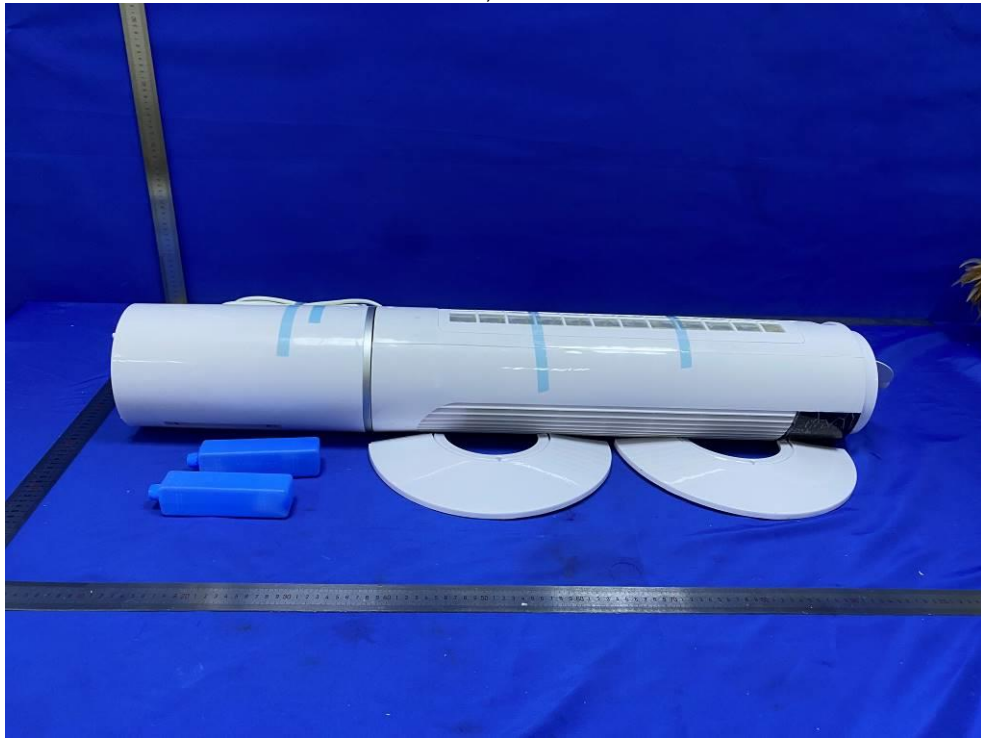


KFT2103J, KFT2103D




KFT2103J, KFT2103D

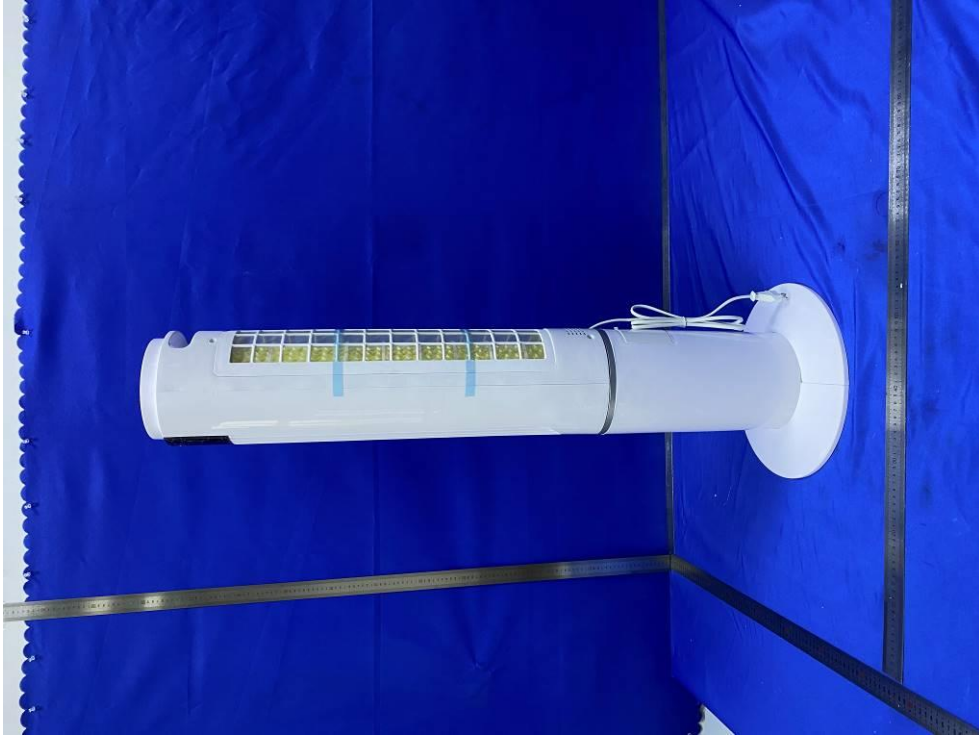


KFT2103J, KFT2103D

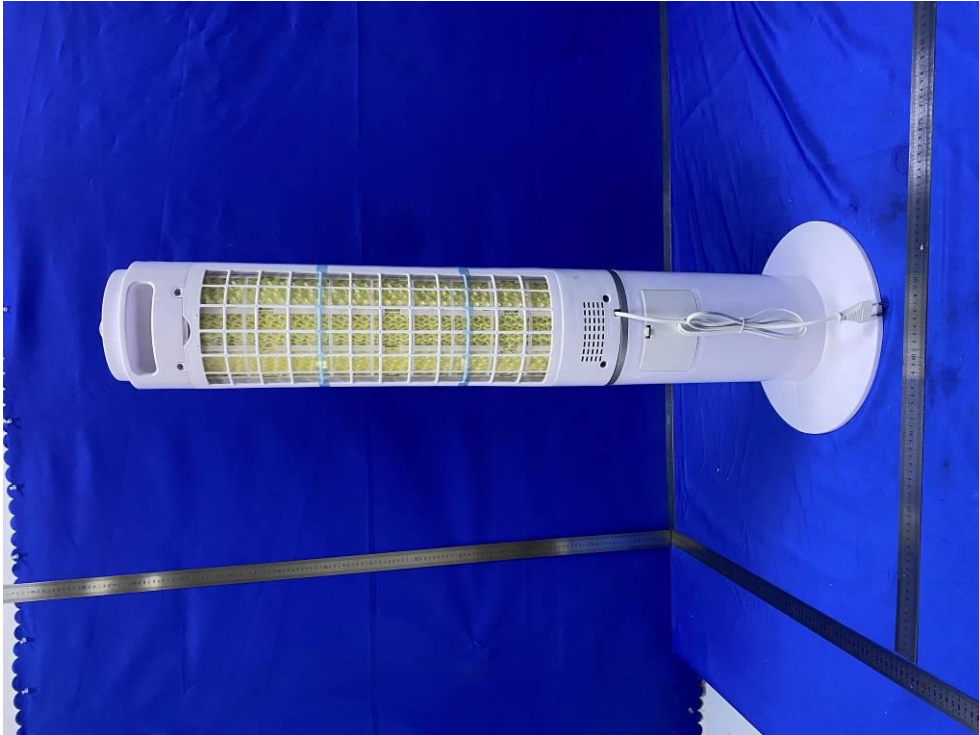


KFT2103J, KFT2103D

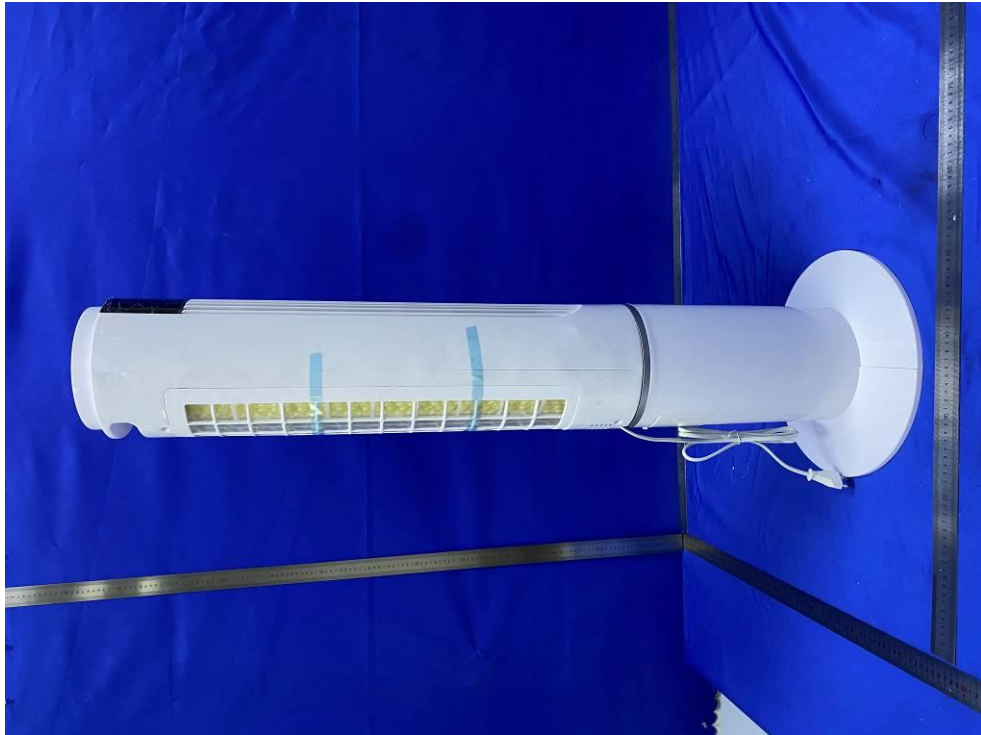


KFT2103J, KFT2103D

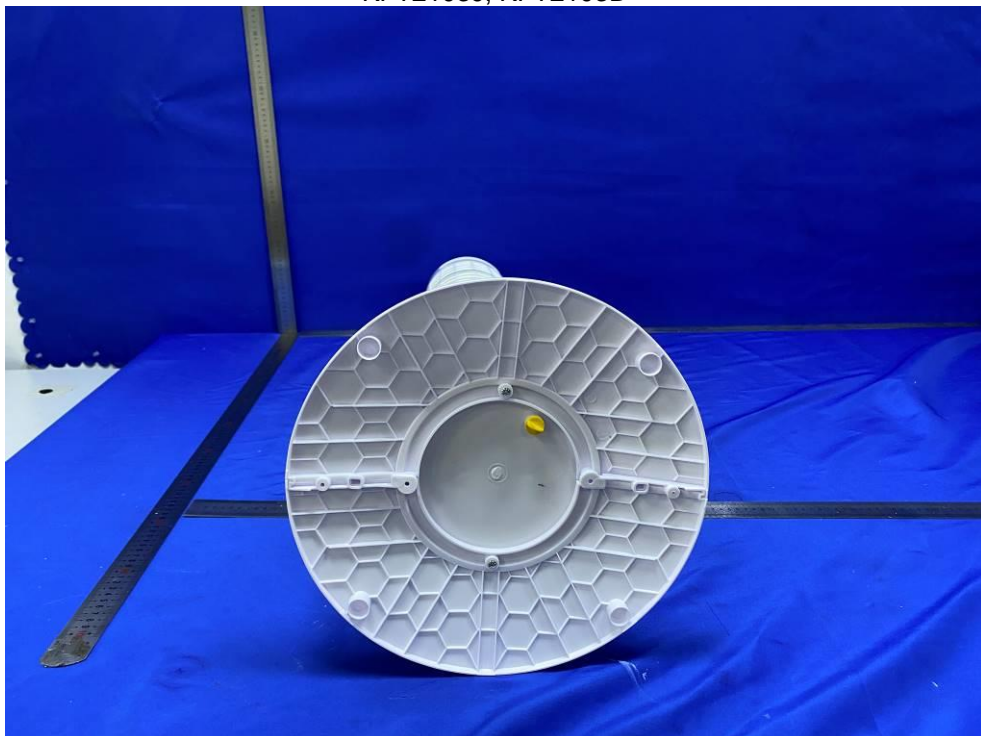

KFT2103J, KFT2103D

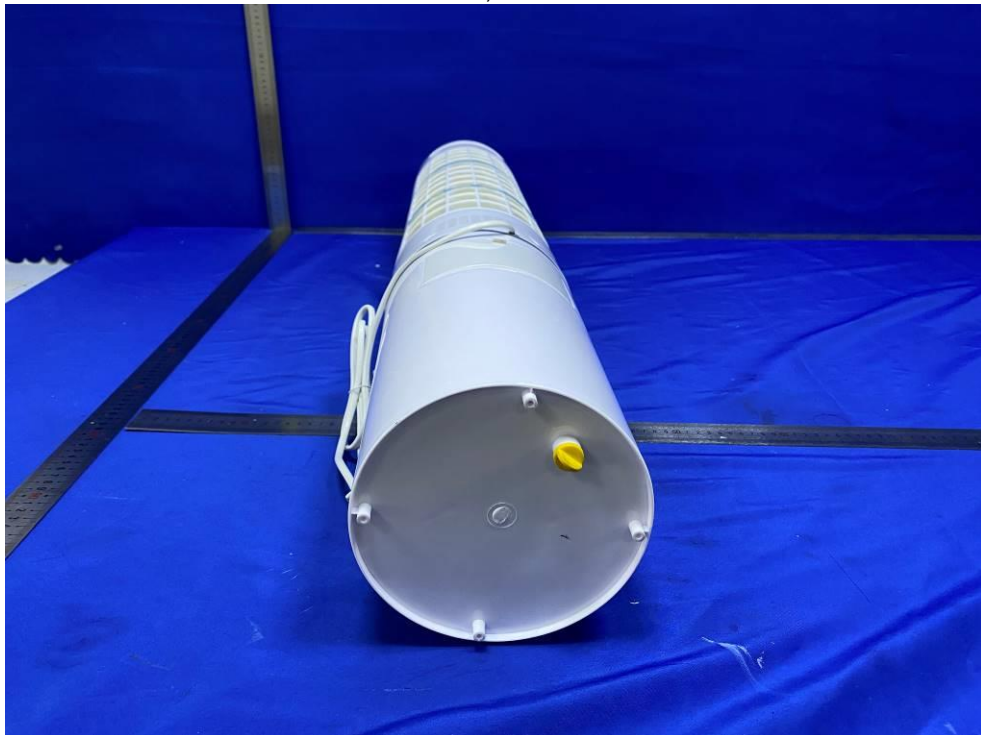


KFT2103J

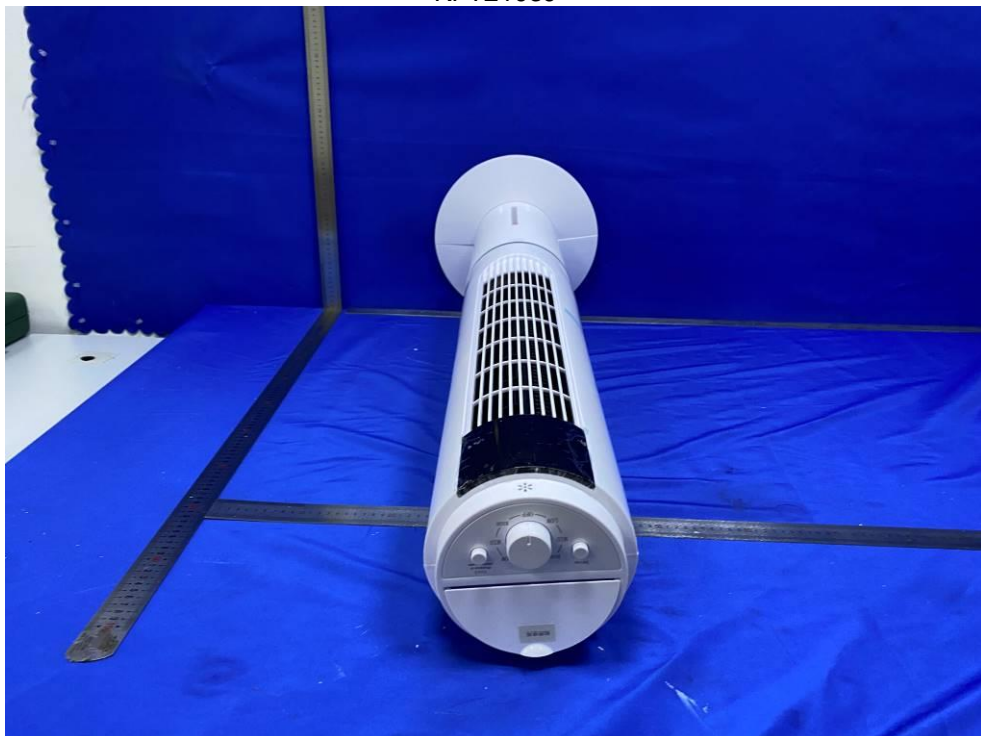


KFT2103J



KFT2103J

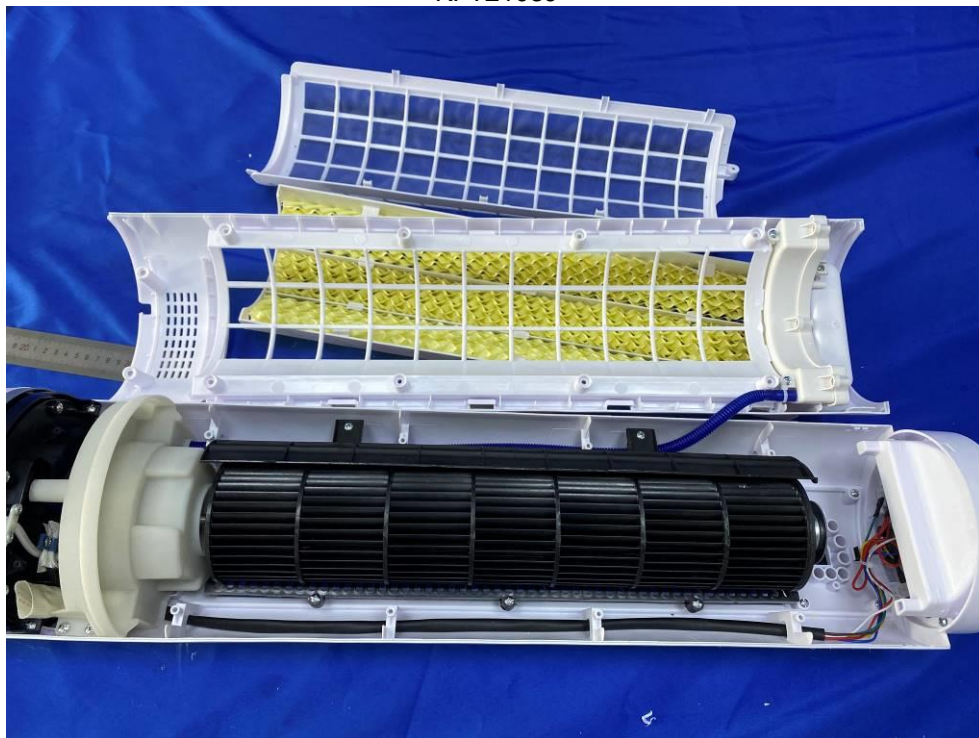


KFT2103J

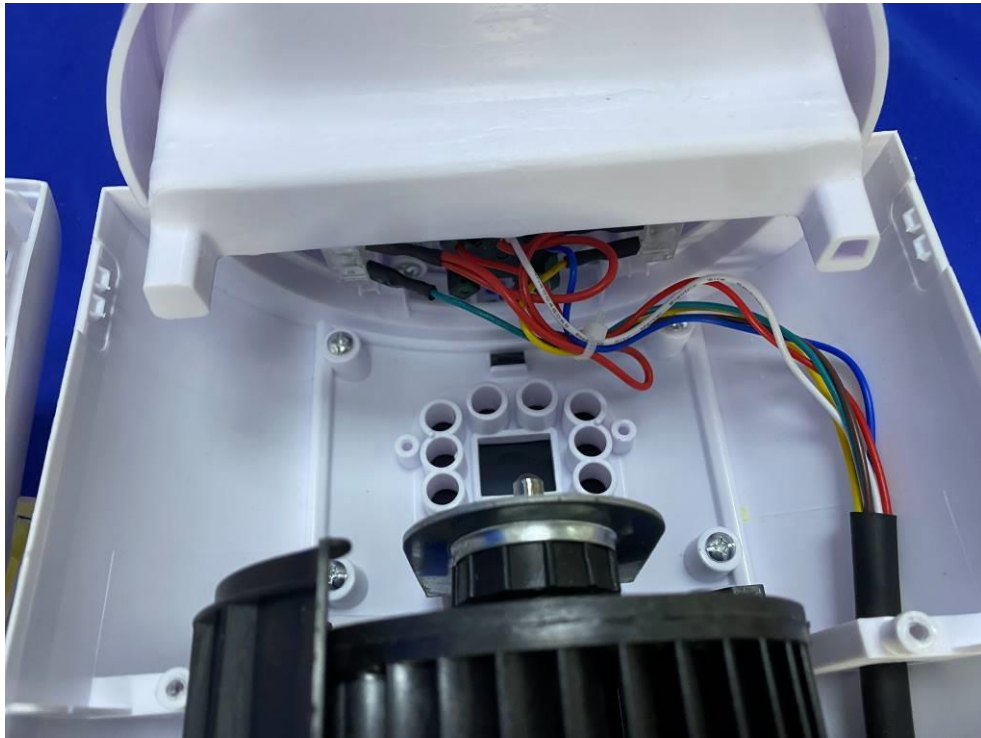

KFT2103J




KFT2103J

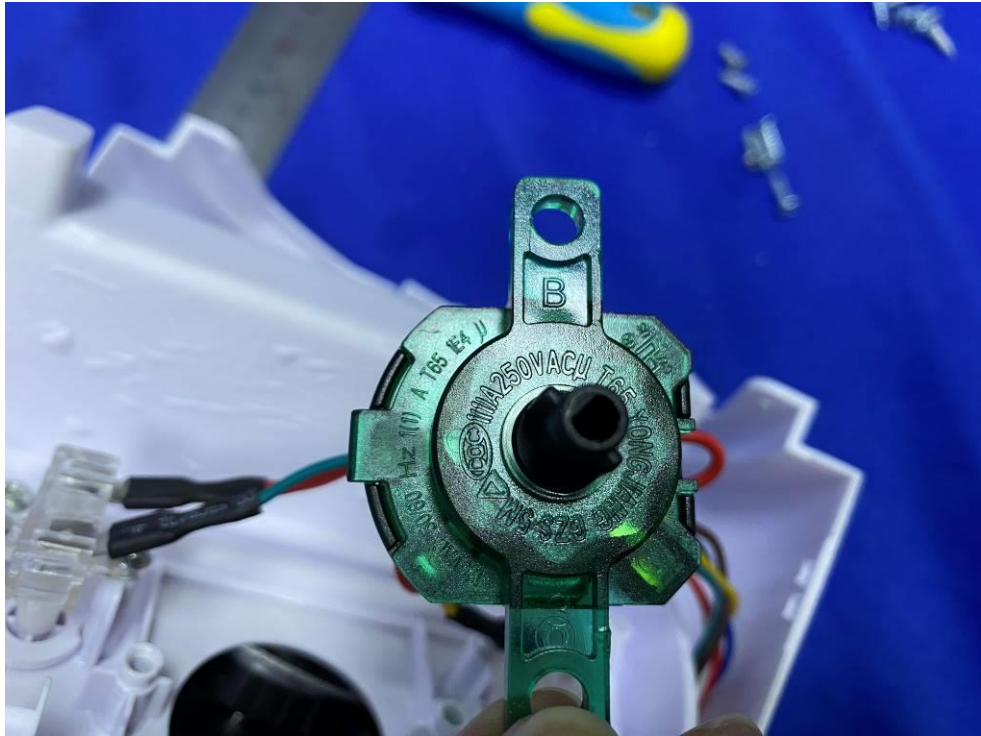


KFT2103D




KFT2103D

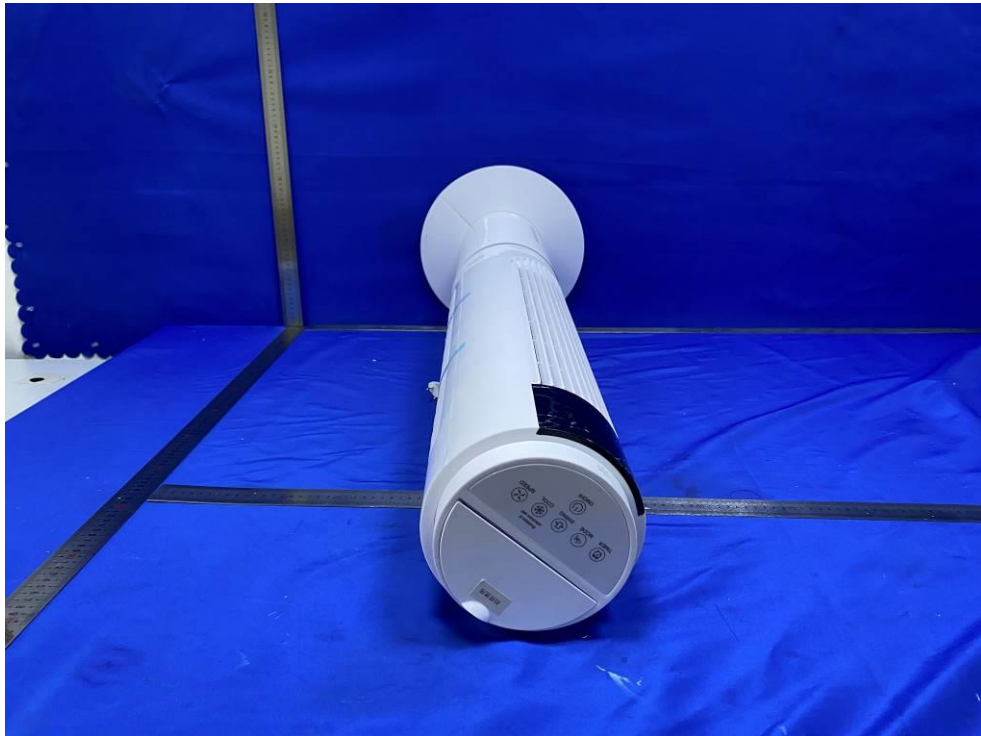


KFT2103D

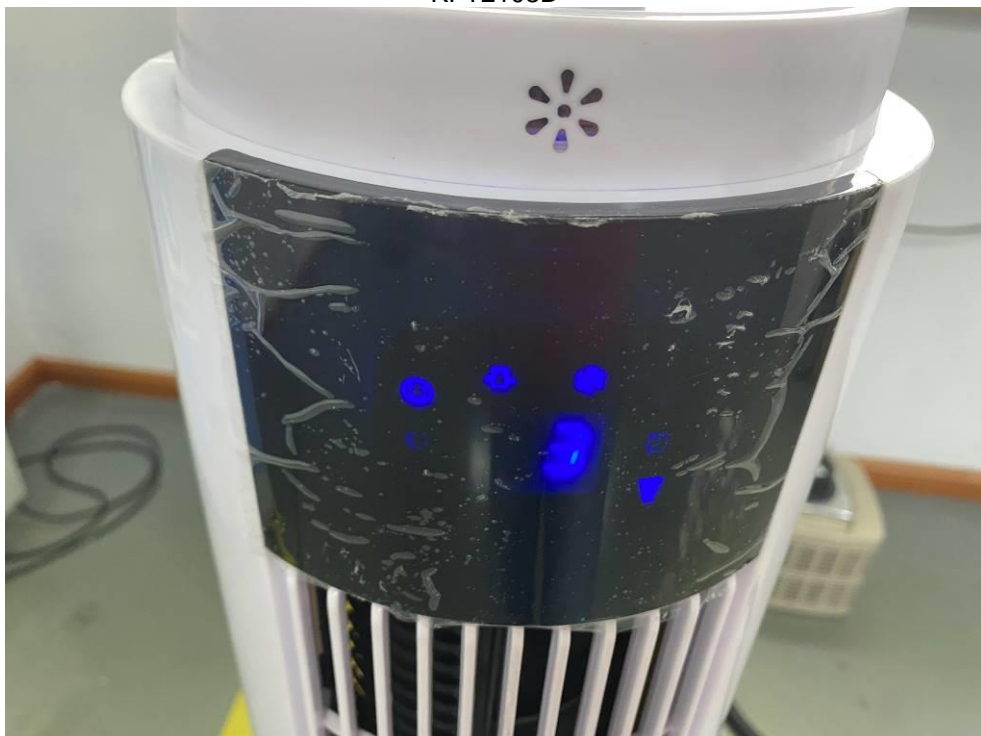


KFT2103D

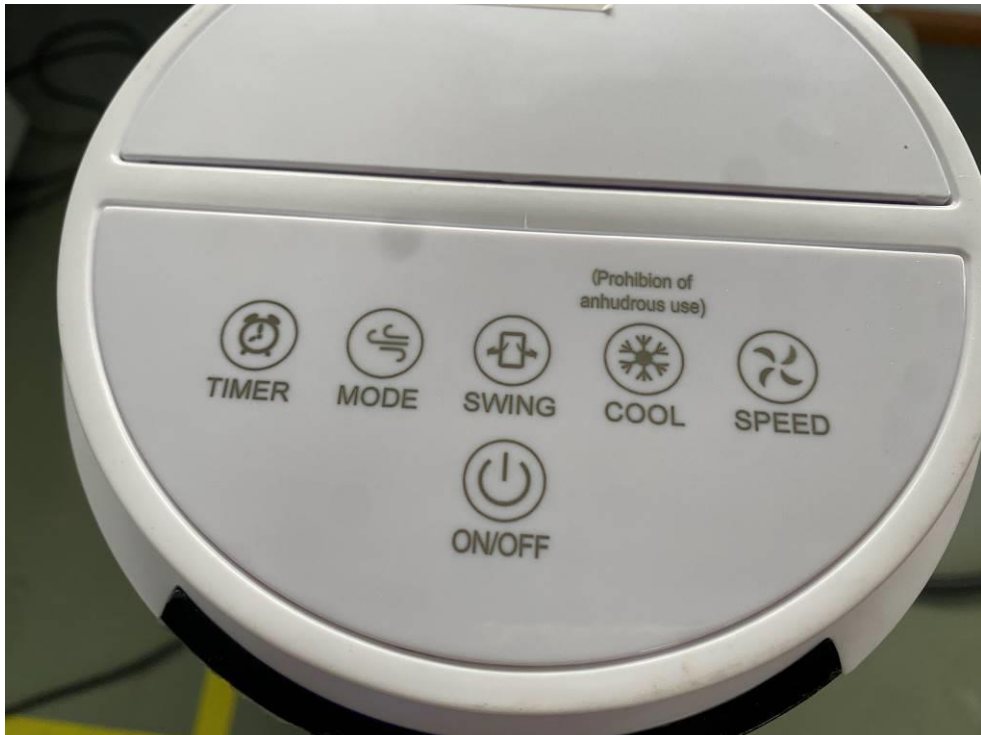


KFT2103D

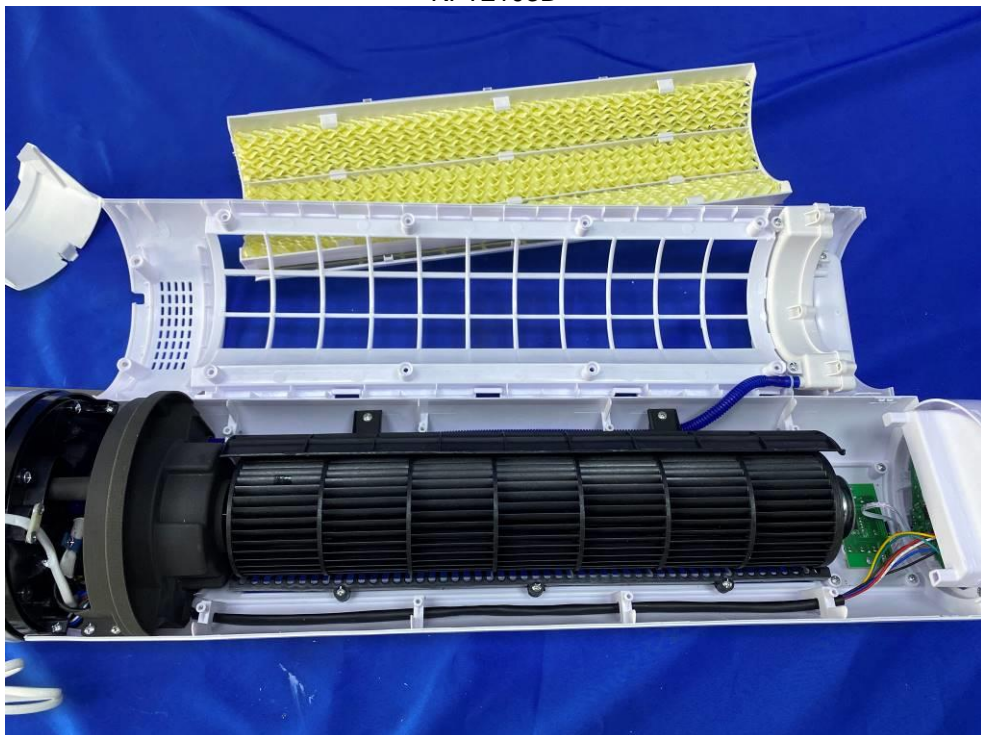


KFT2103D

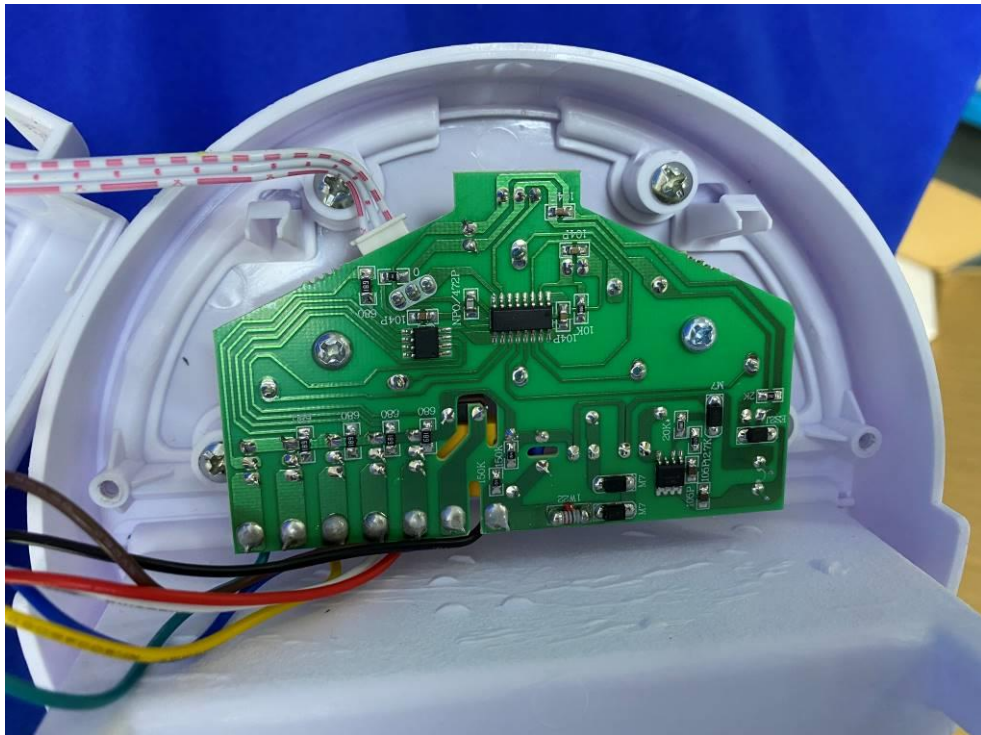


KFT2103D

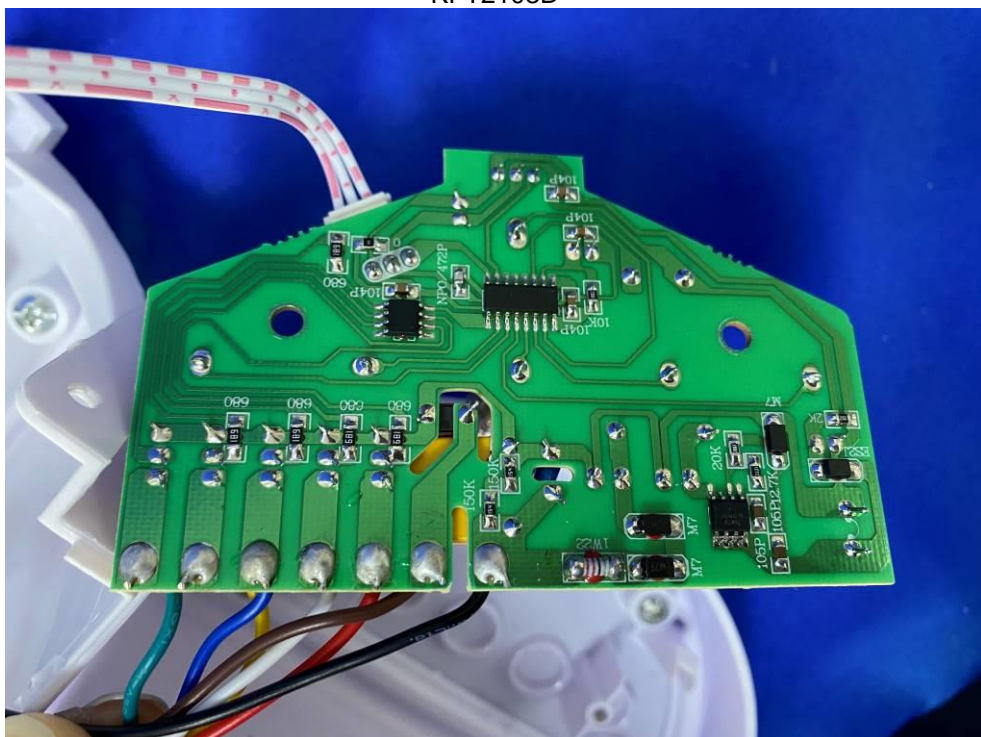


KFT2103D

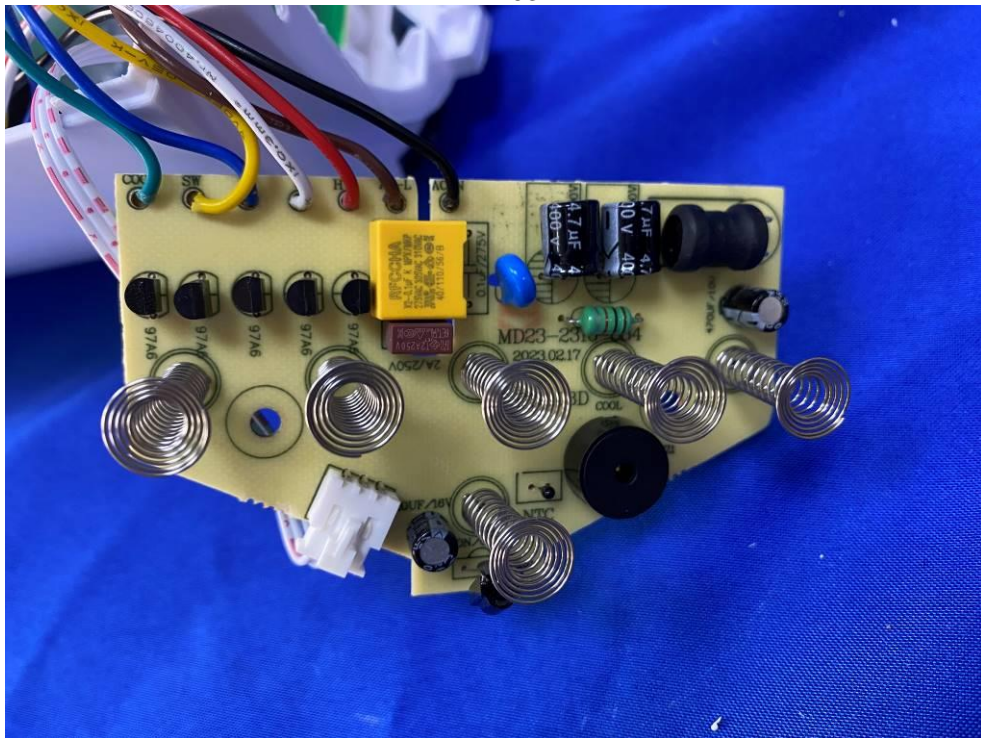


KFT2103D

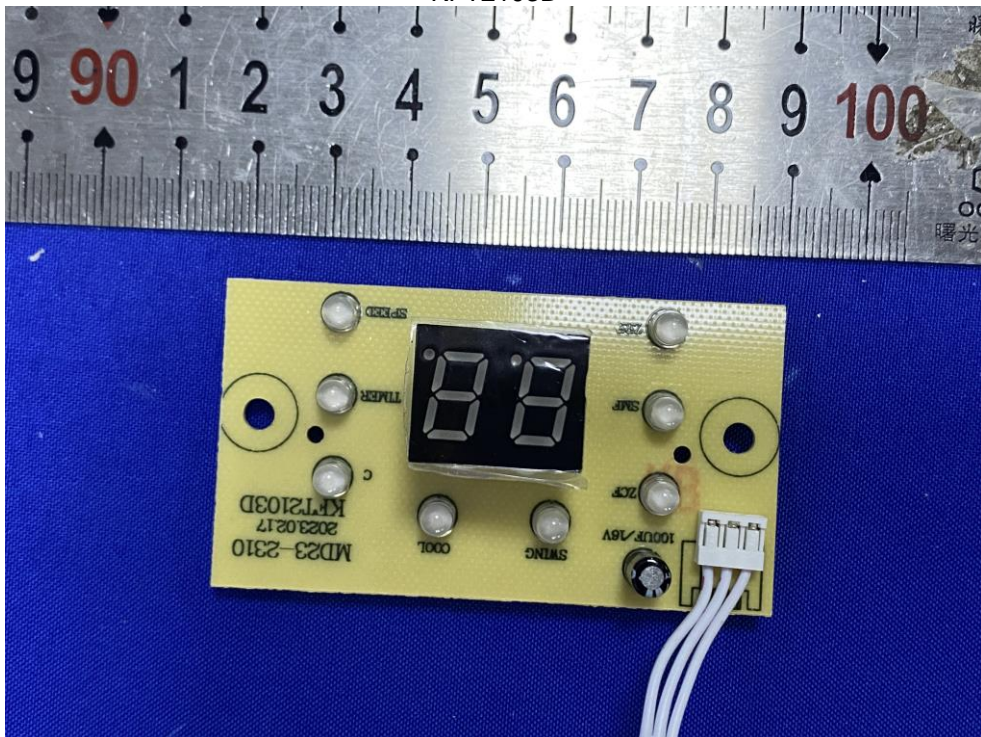


KFT2103D

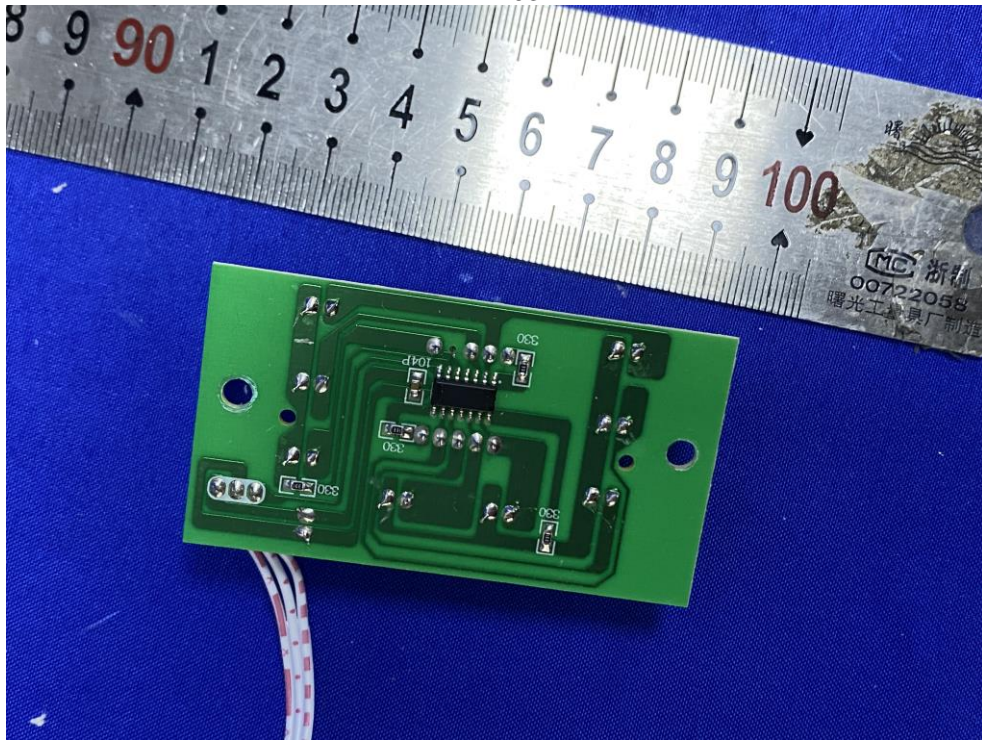

KFT2103J, KFT2103D

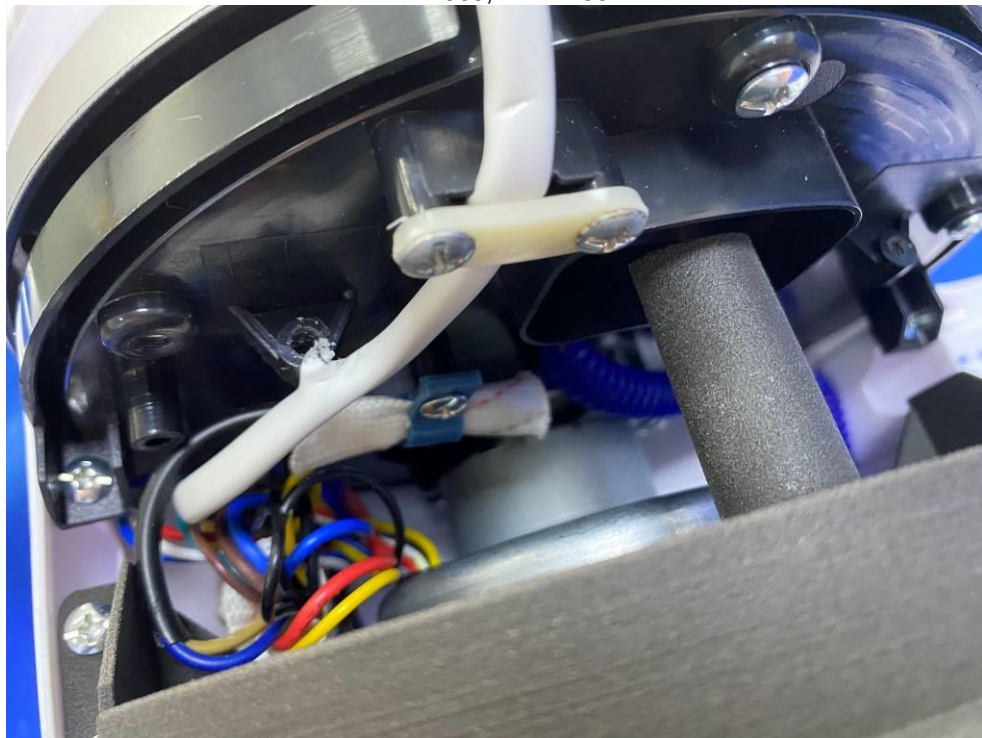


KFT2103J, KFT2103D

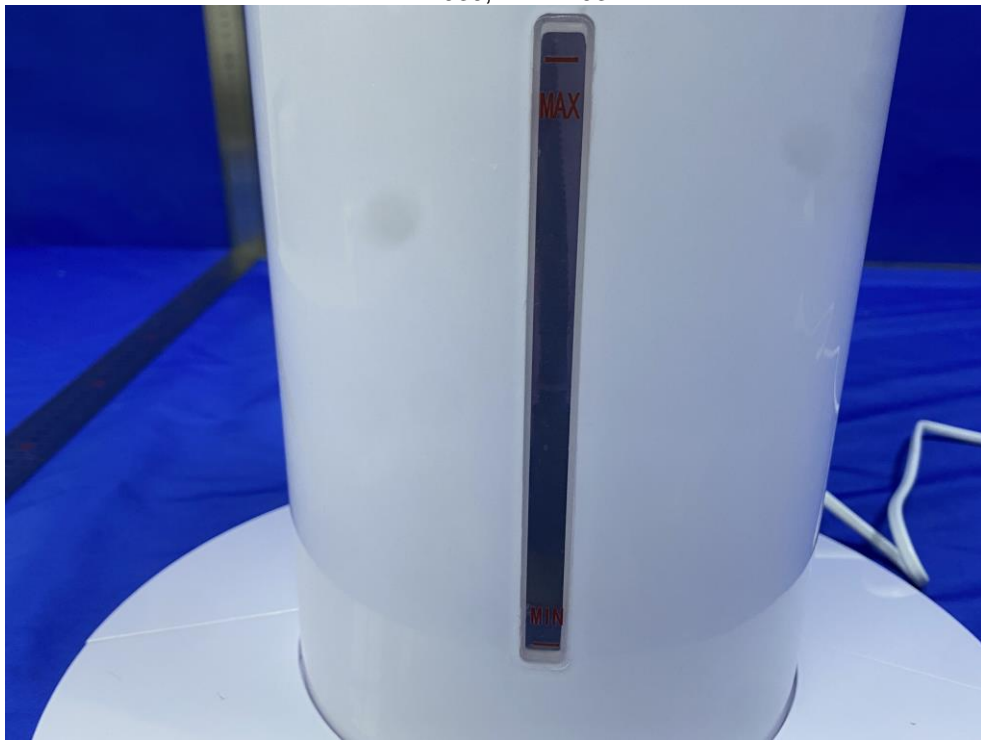

KFT2103J, KFT2103D




KFT2103J, KFT2103D

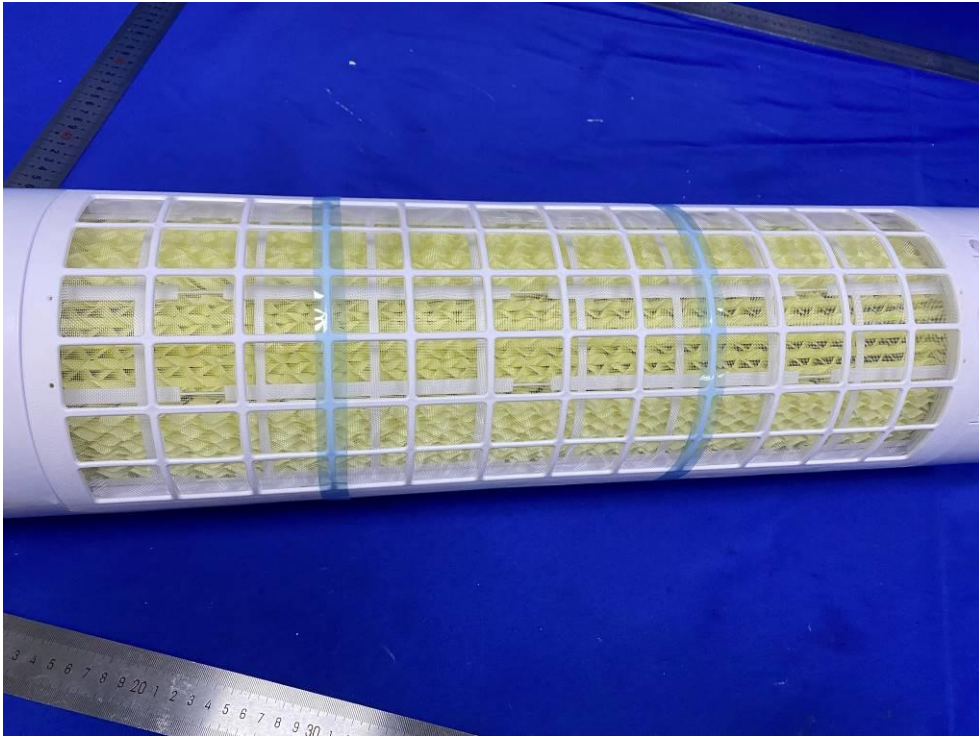


KFT2103J, KFT2103D




KFT2103J, KFT2103D

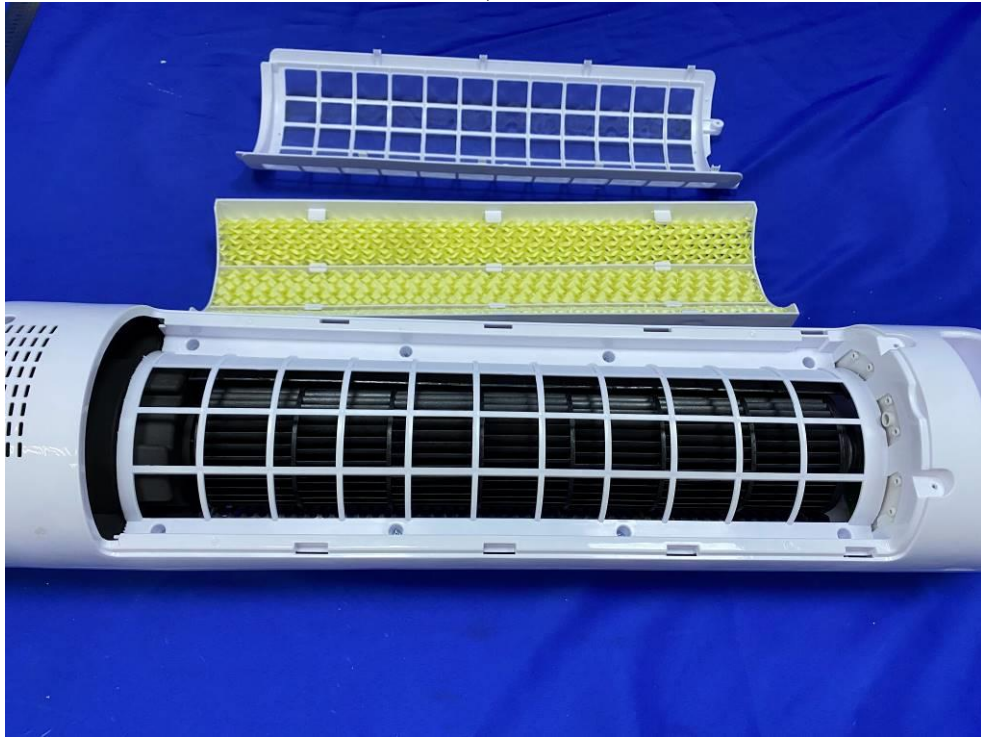


KFT2001J, KFT2001D, KFT2103J, KFT2103D

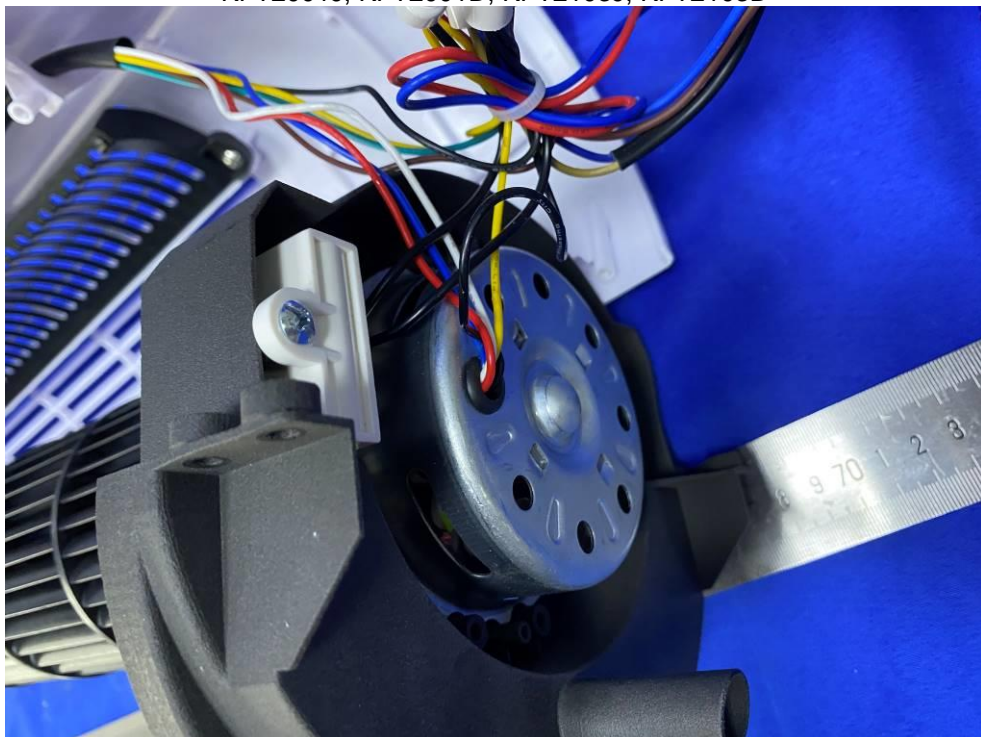

KFT2001J, KFT2001D, KFT2103J, KFT2103D

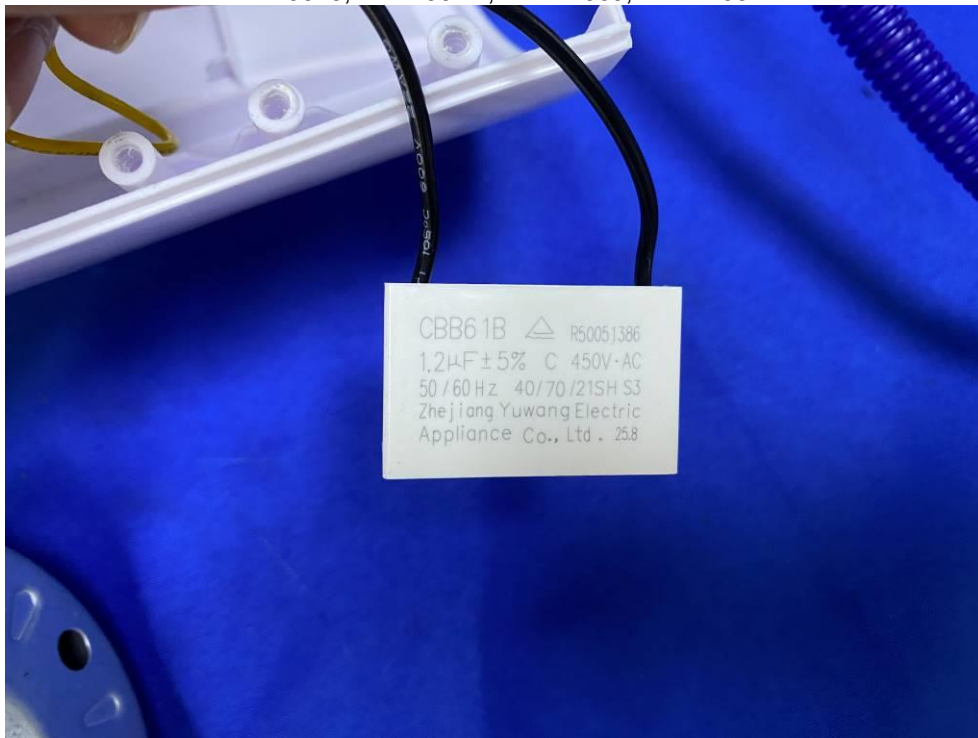

KFT2001J, KFT2001D, KFT2103J, KFT2103D

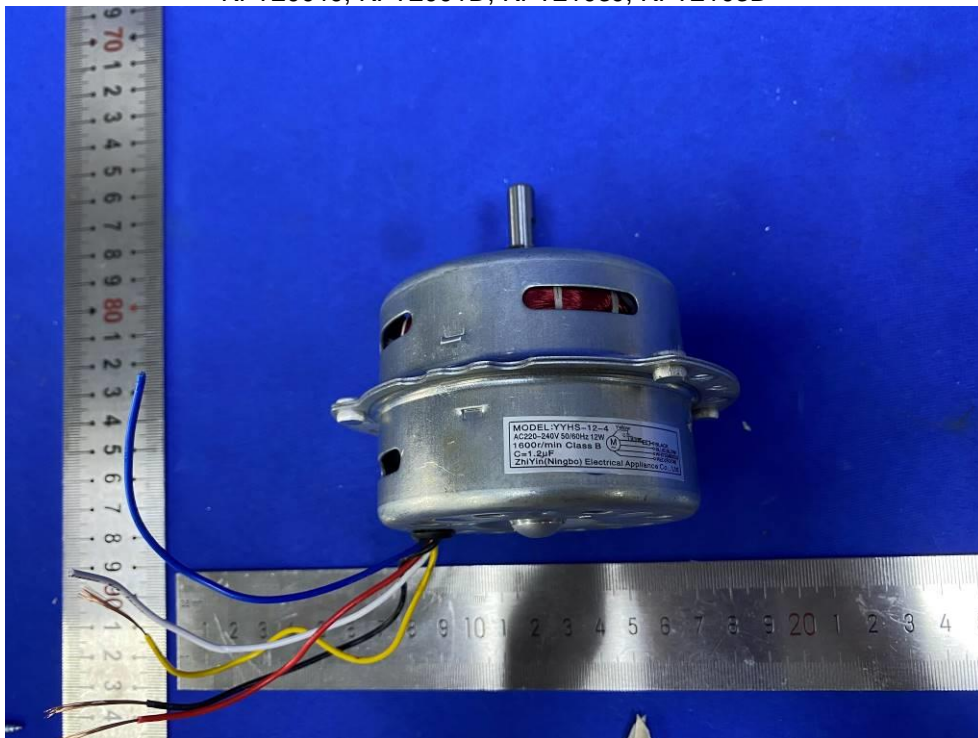

KFT2001J, KFT2001D, KFT2103J, KFT2103D



KFT2407D



KFT2407J




KFT2407J, KFT2407D



KFT2407J, KFT2407D




KFT2407J, KFT2407D

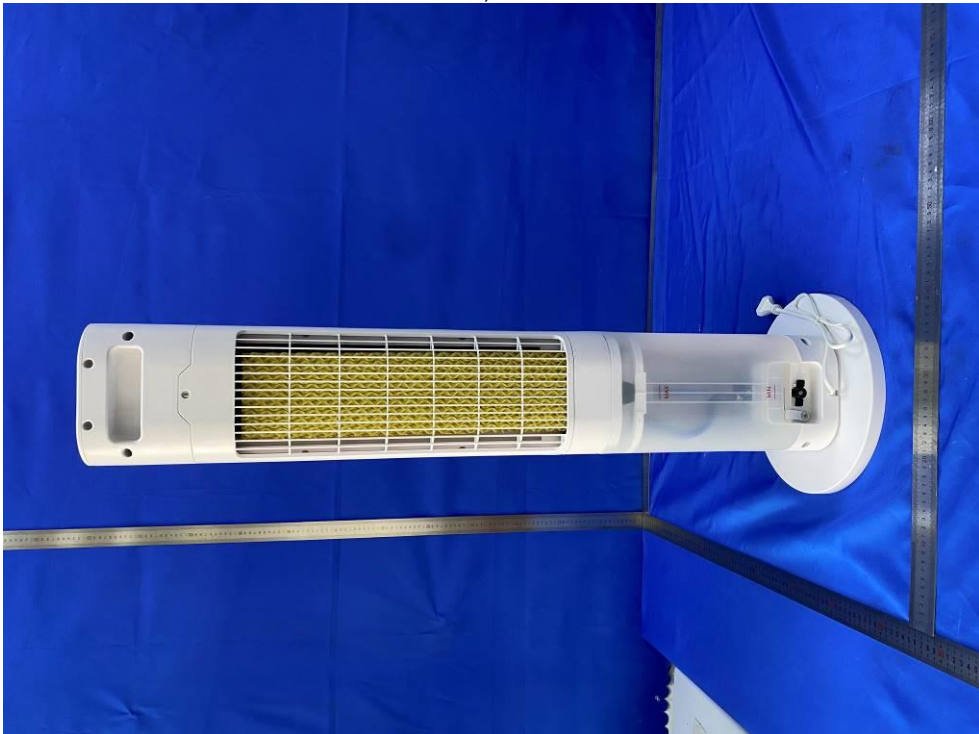


KFT2407J, KFT2407D




KFT2407J, KFT2407D

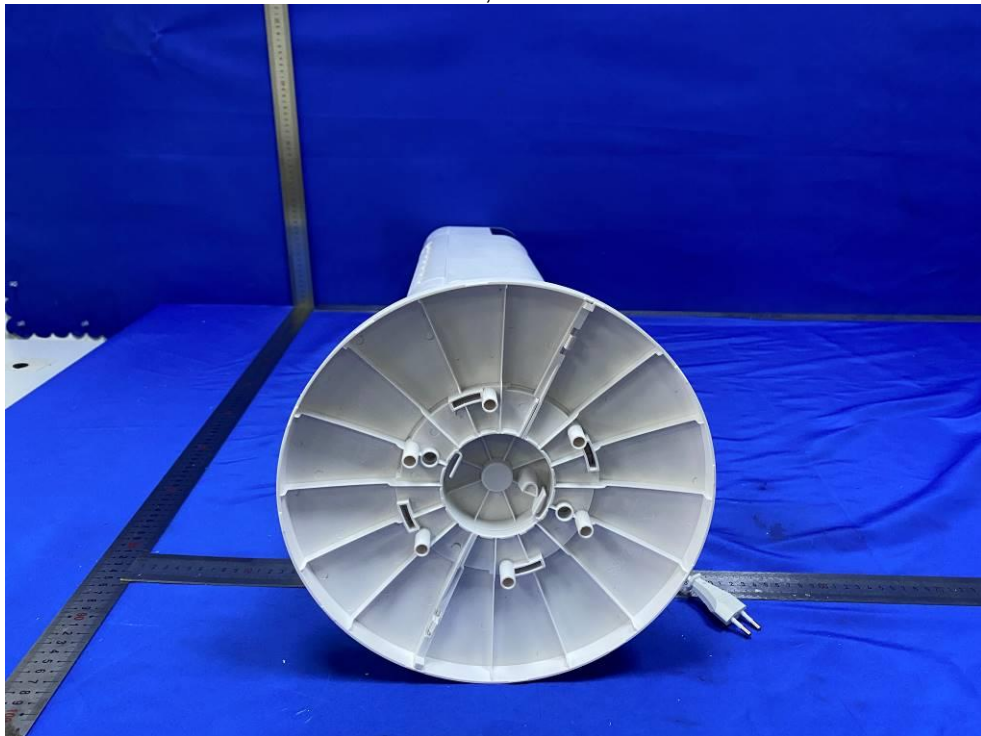

KFT2407J, KFT2407D

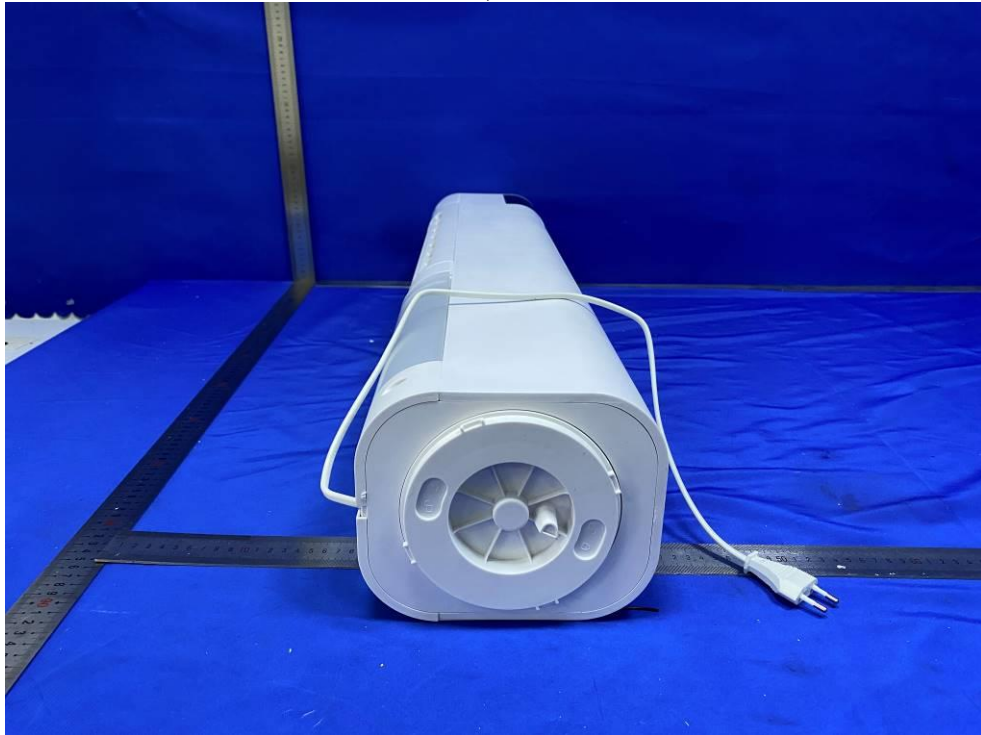

KFT2407J, KFT2407D

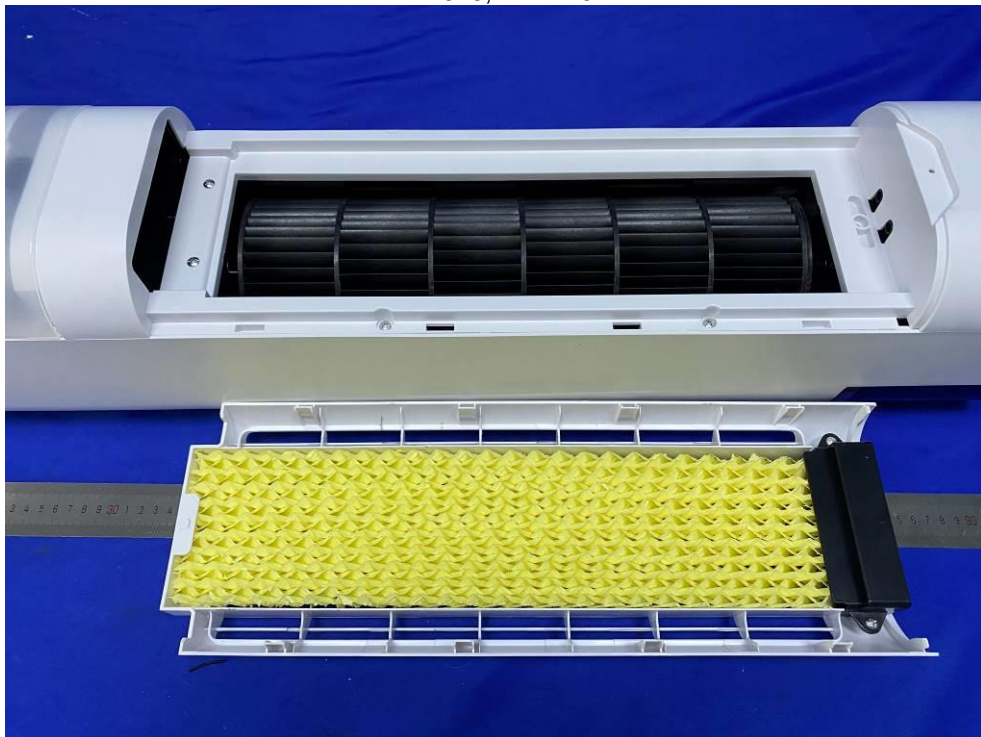


KFT2407J




KFT2407J




KFT2407J

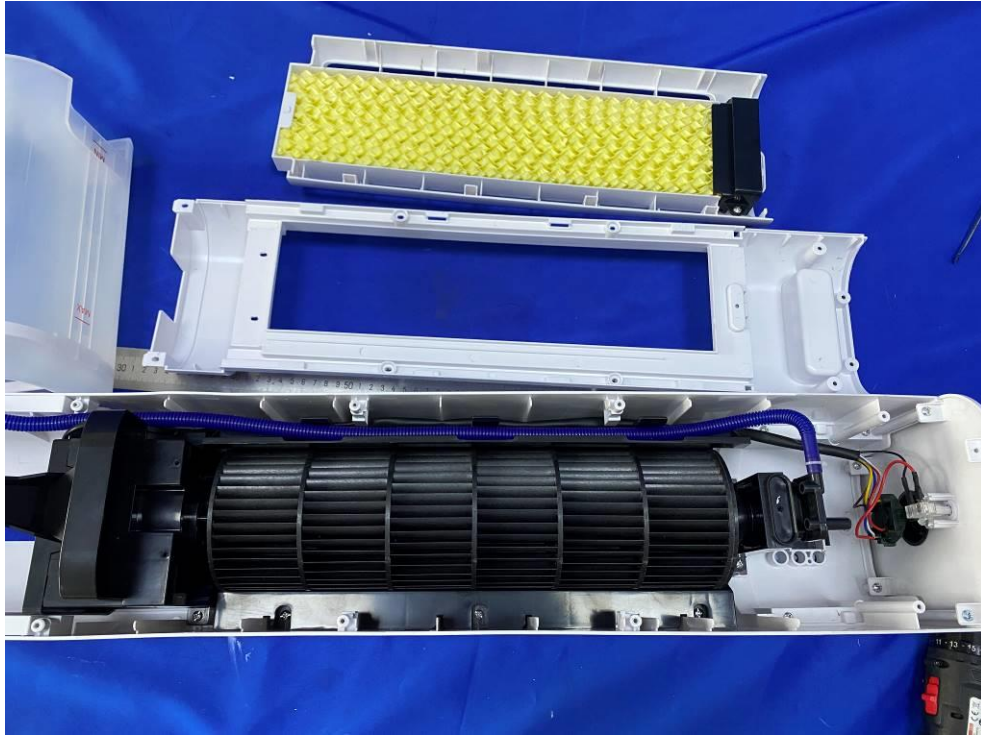


KFT2407J

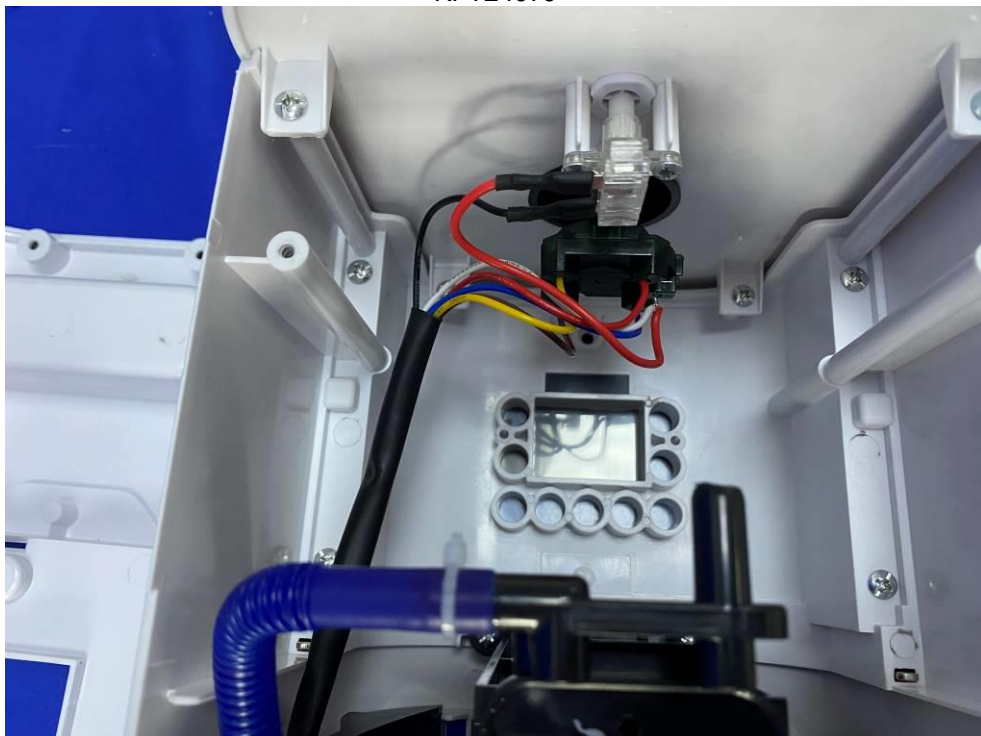


KFT2407D

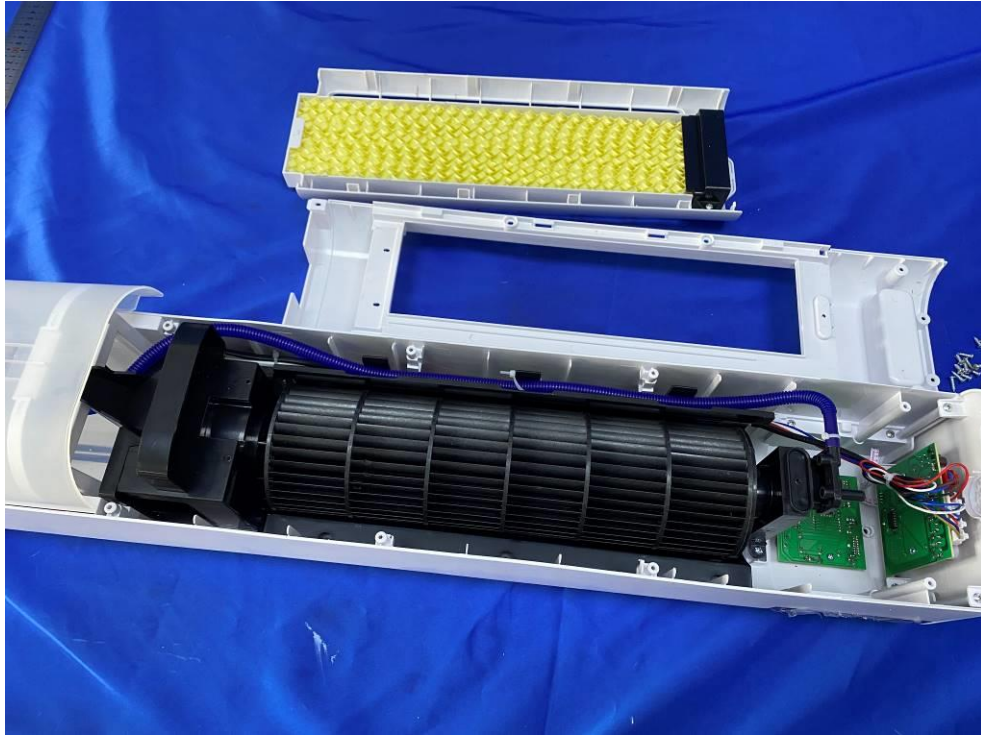


KFT2407D

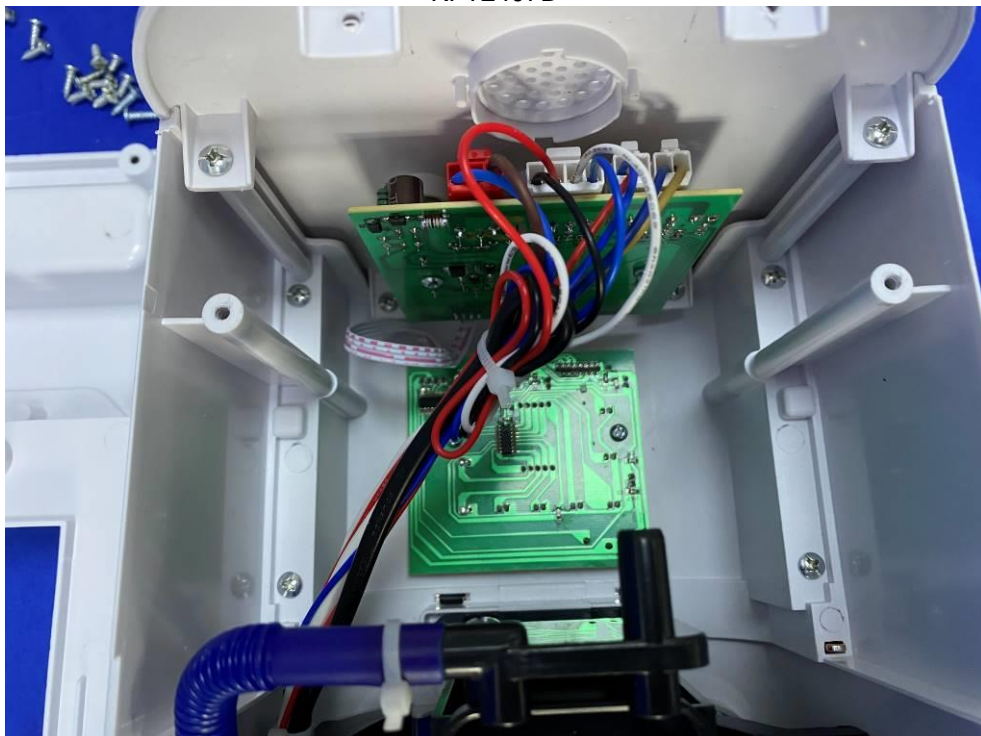


KFT2407D

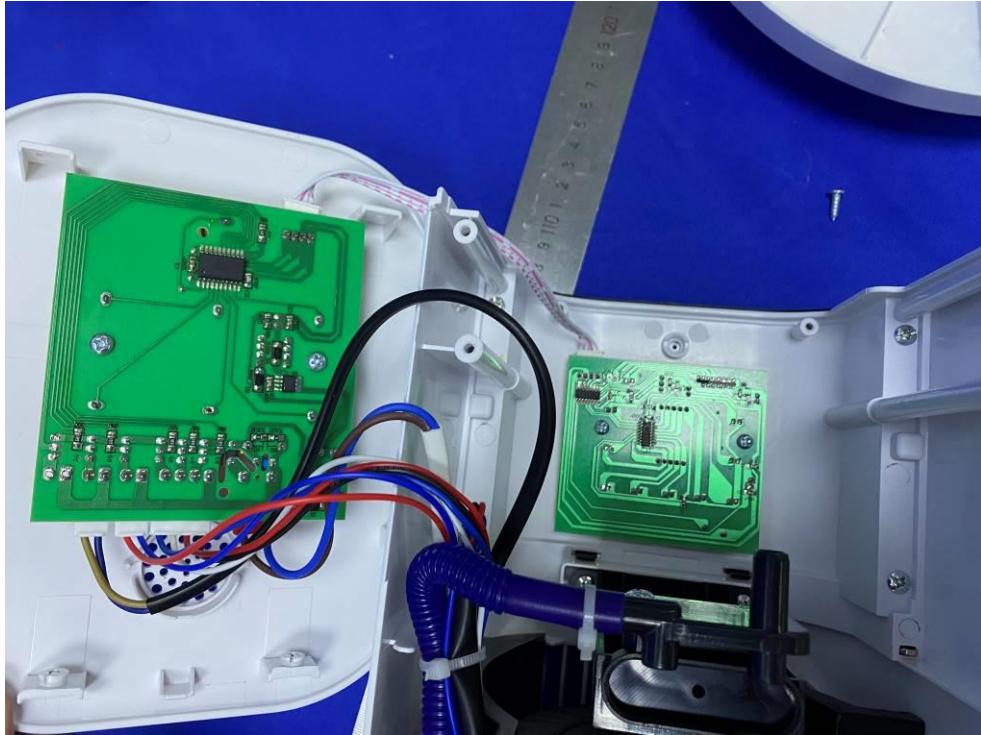


KFT2407D

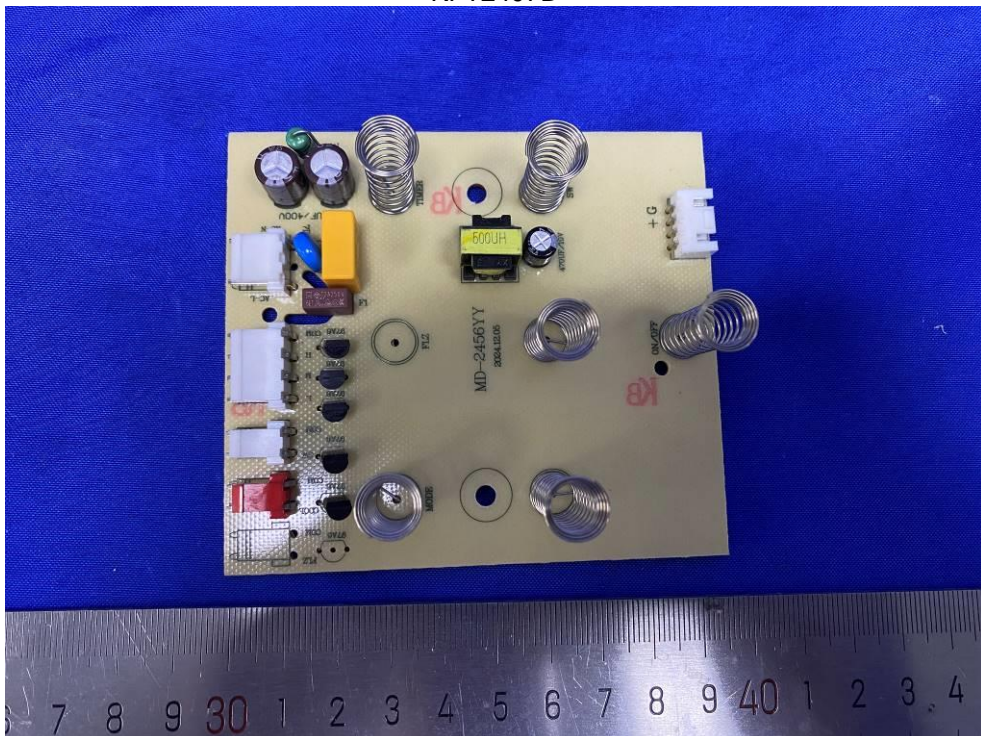


KFT2407D

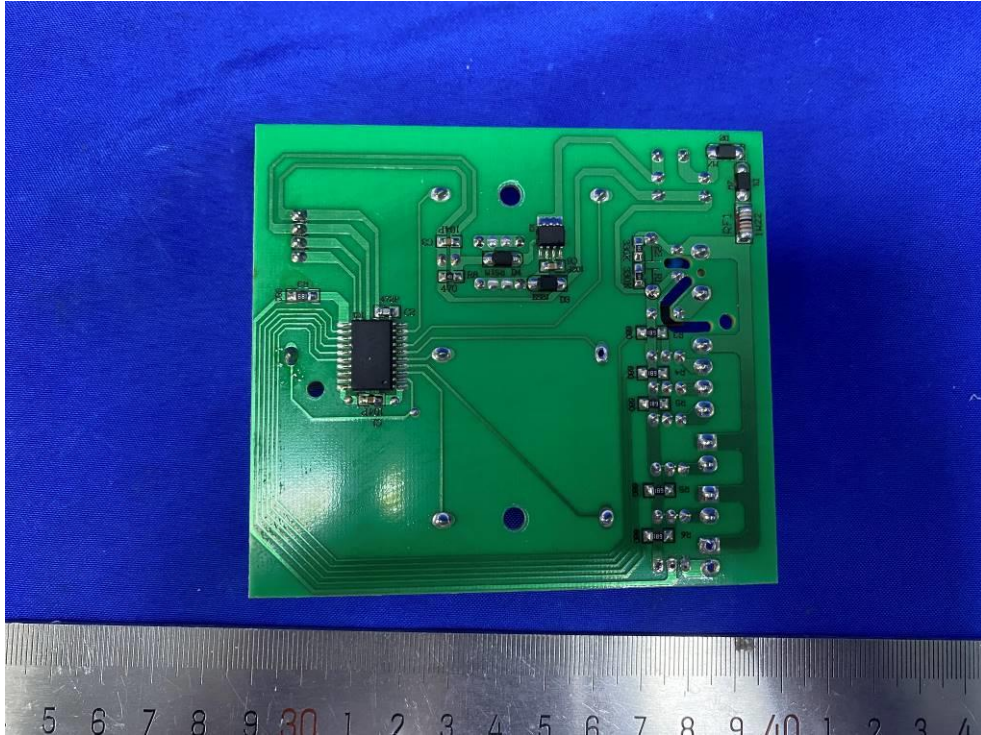

KFT2407D

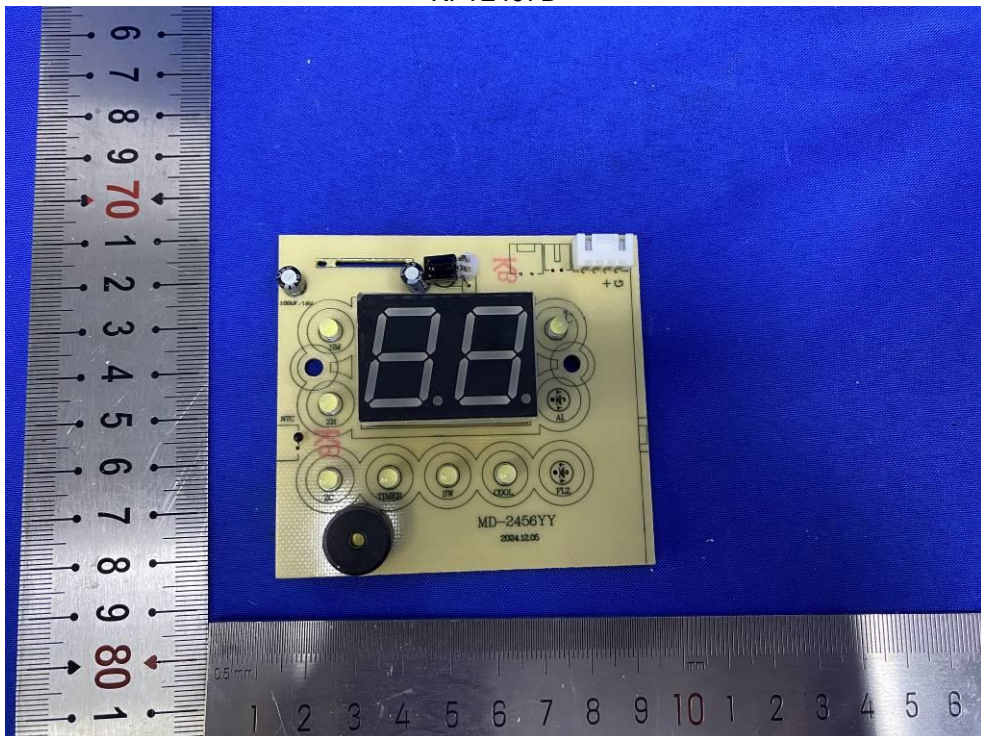

KFT2407D

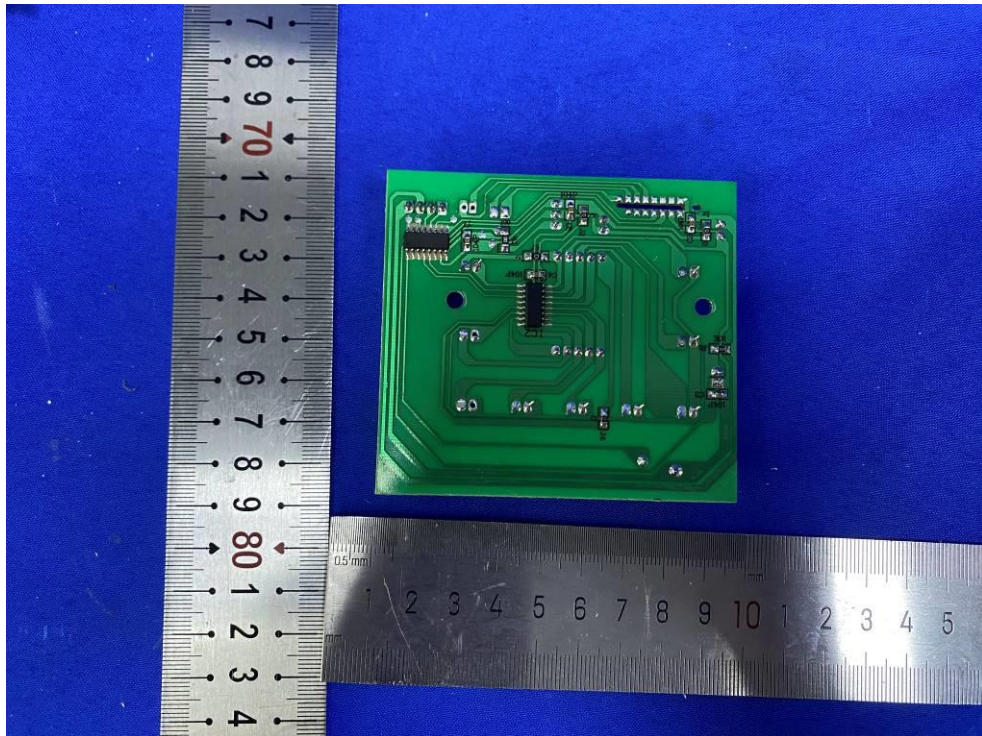

KFT2407, KFT2407D



KFT2605D-S



KFT2605J



KFT2605D, KFT2605D-S, KFT2605J




KFT2605D, KFT2605D-S, KFT2605J




KFT2605D, KFT2605D-S, KFT2605J




KFT2605D, KFT2605D-S, KFT2605J

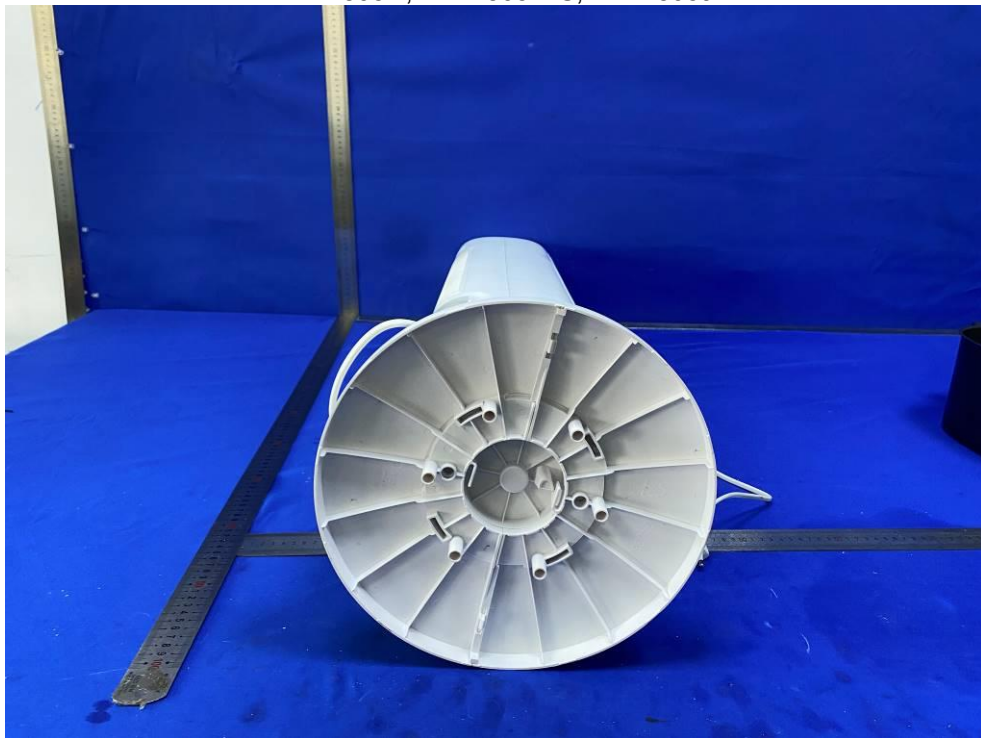

KFT2605D, KFT2605D-S, KFT2605J

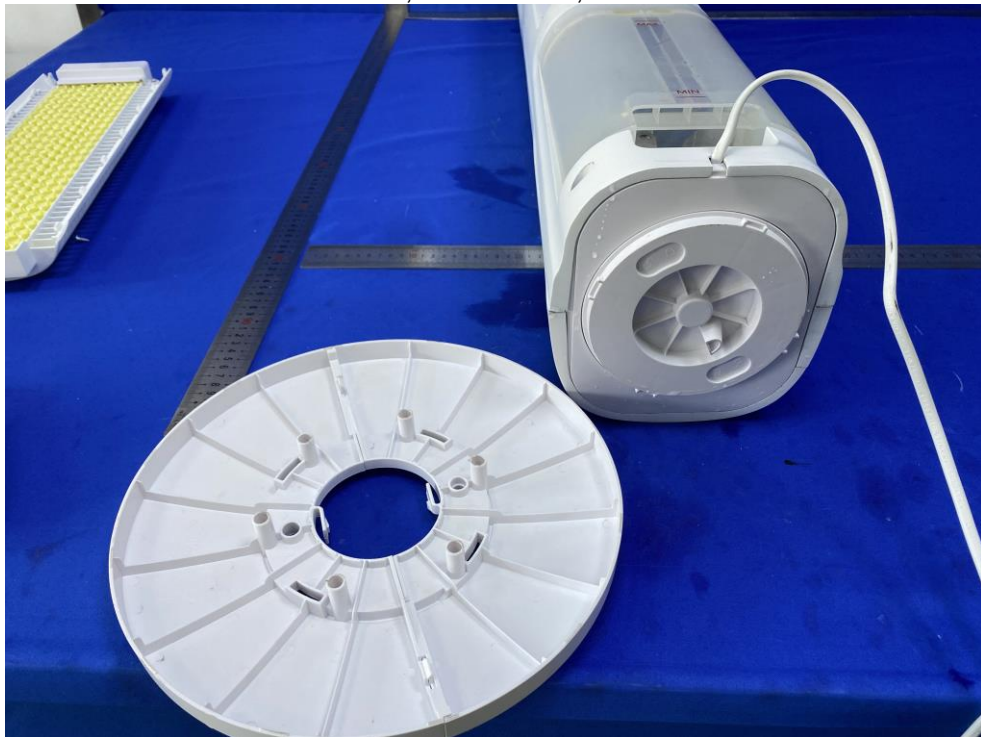


KFT2605D, KFT2605D-S, KFT2605J

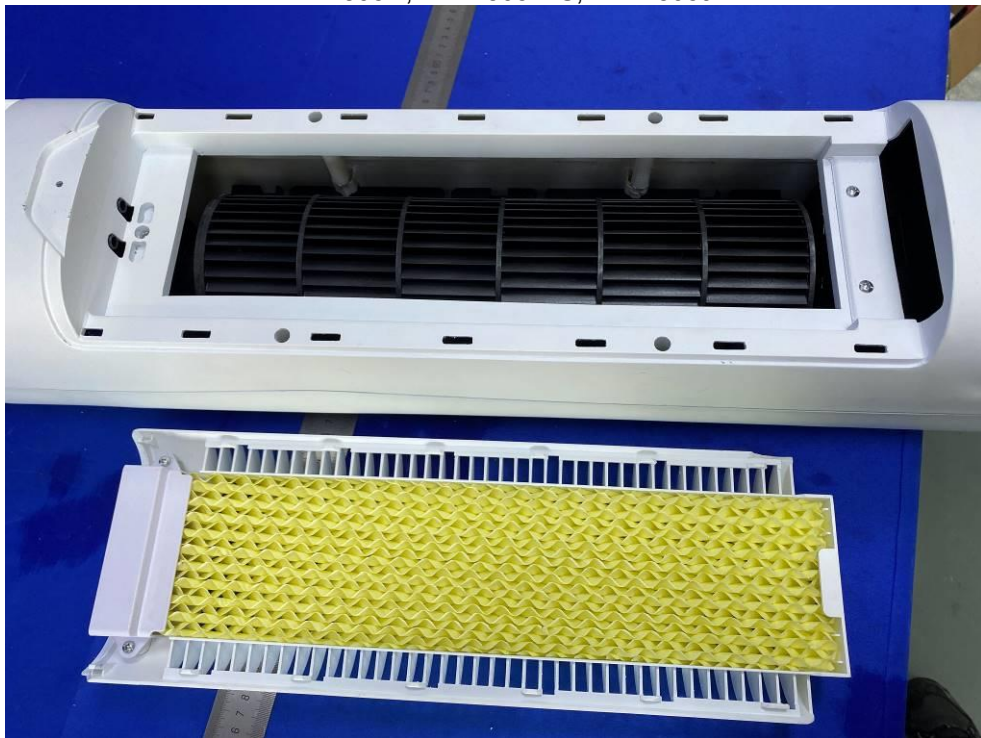

KFT2605D




KFT2605D

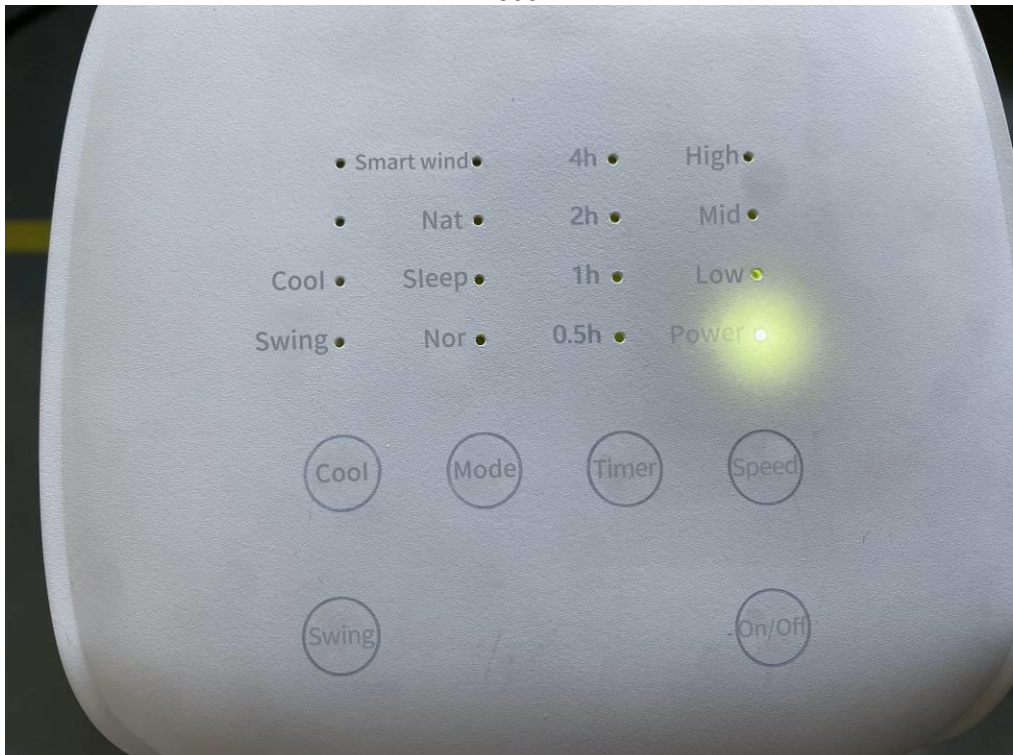


KFT2605D-S



KFT2605D-S

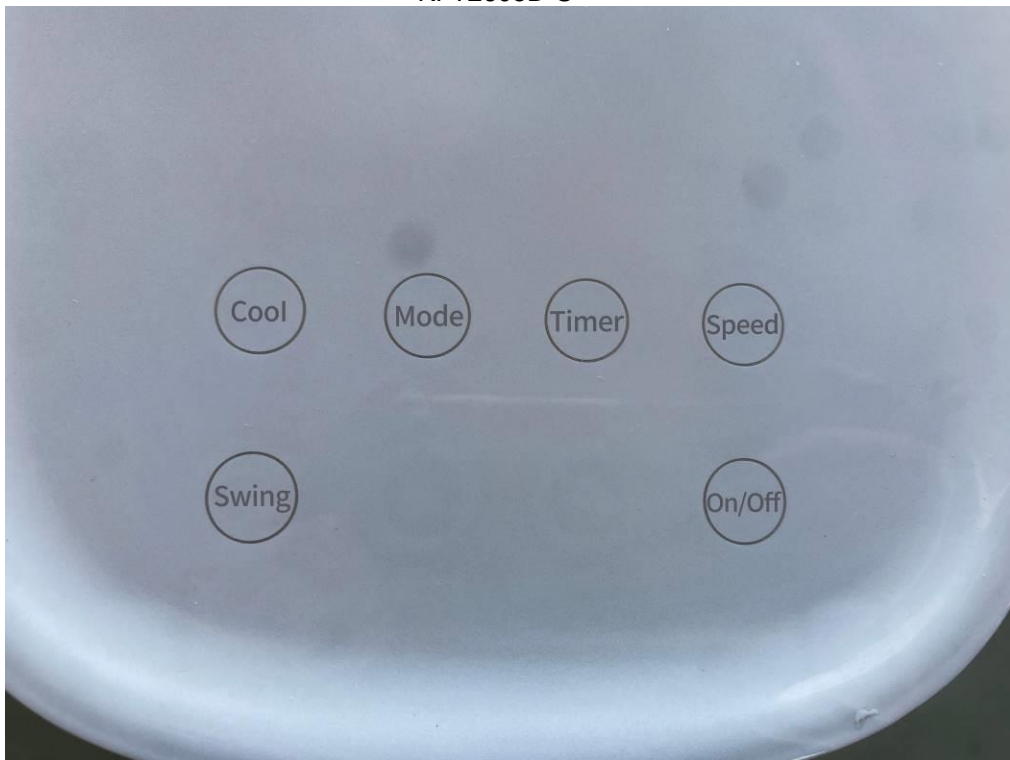


KFT2605D

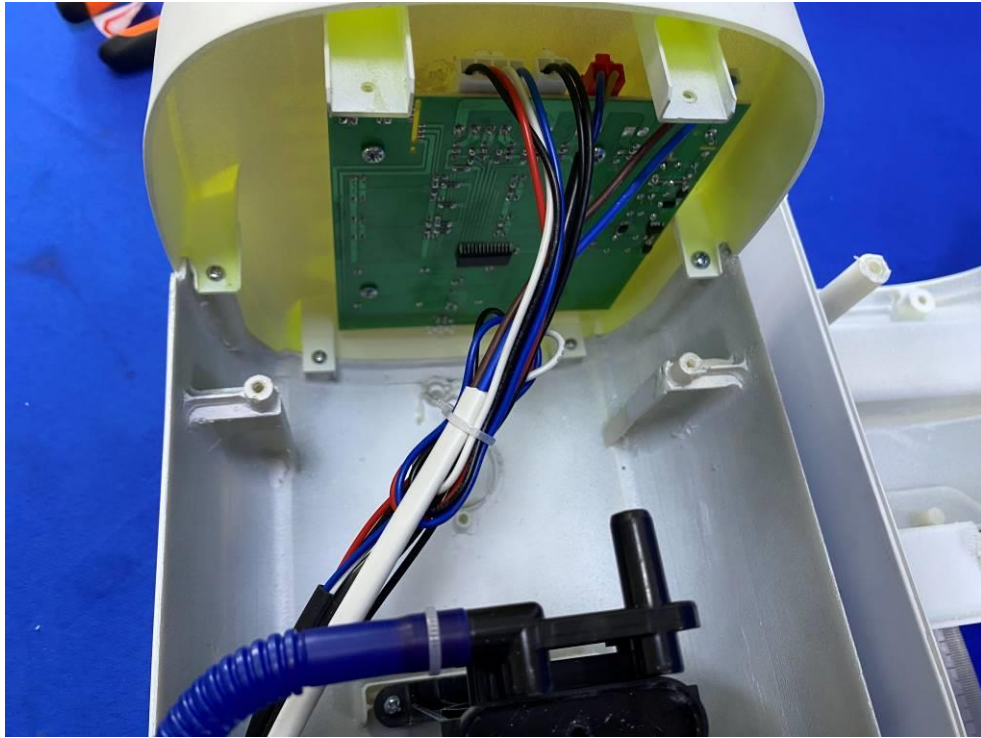


KFT2605D




KFT2605D

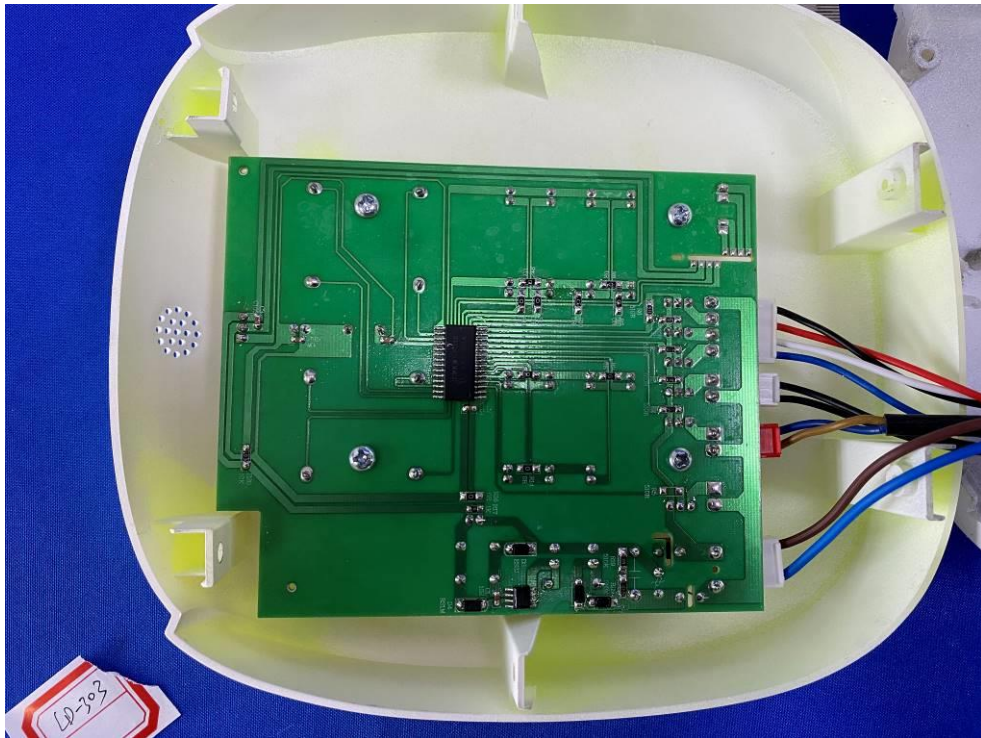


KFT2605D

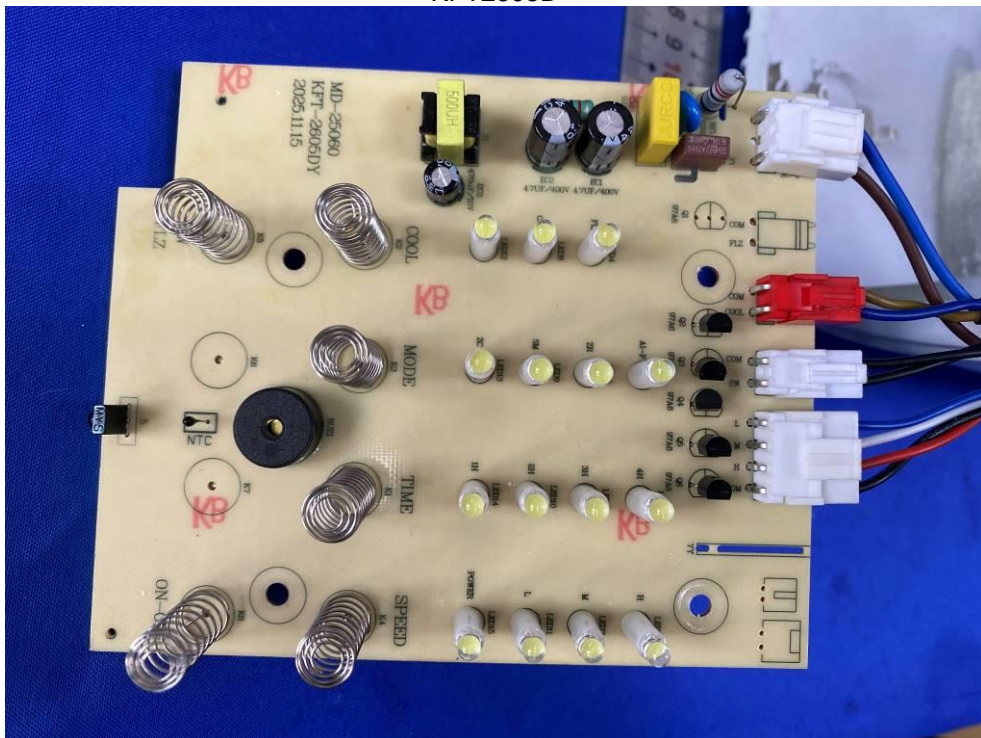

KFT2605D

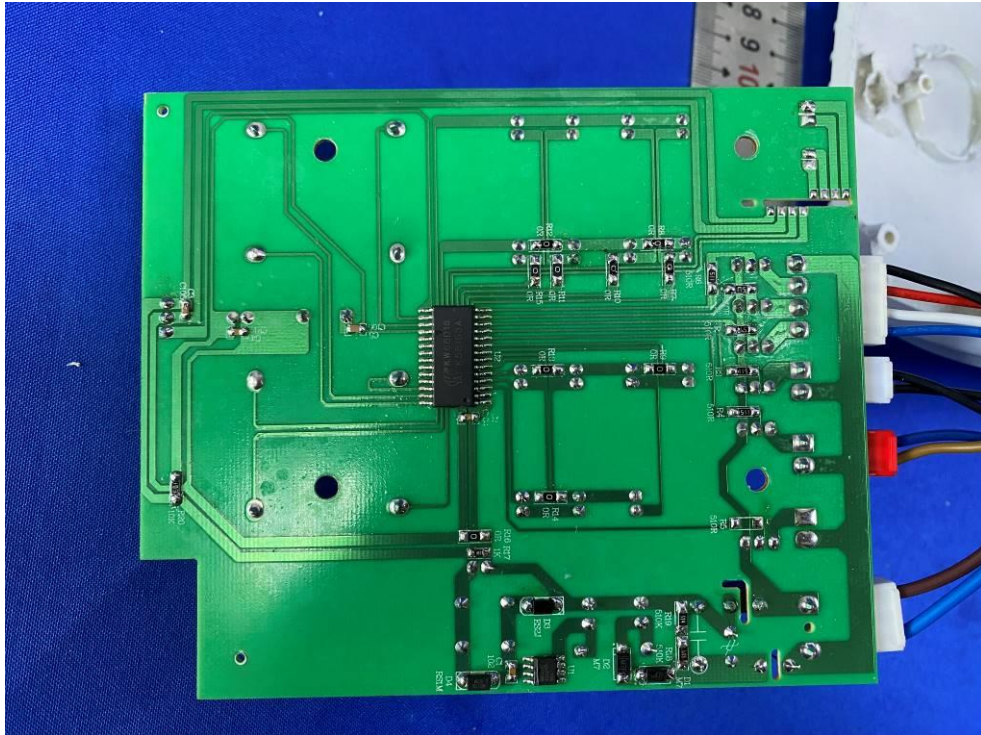

KFT2605D-S

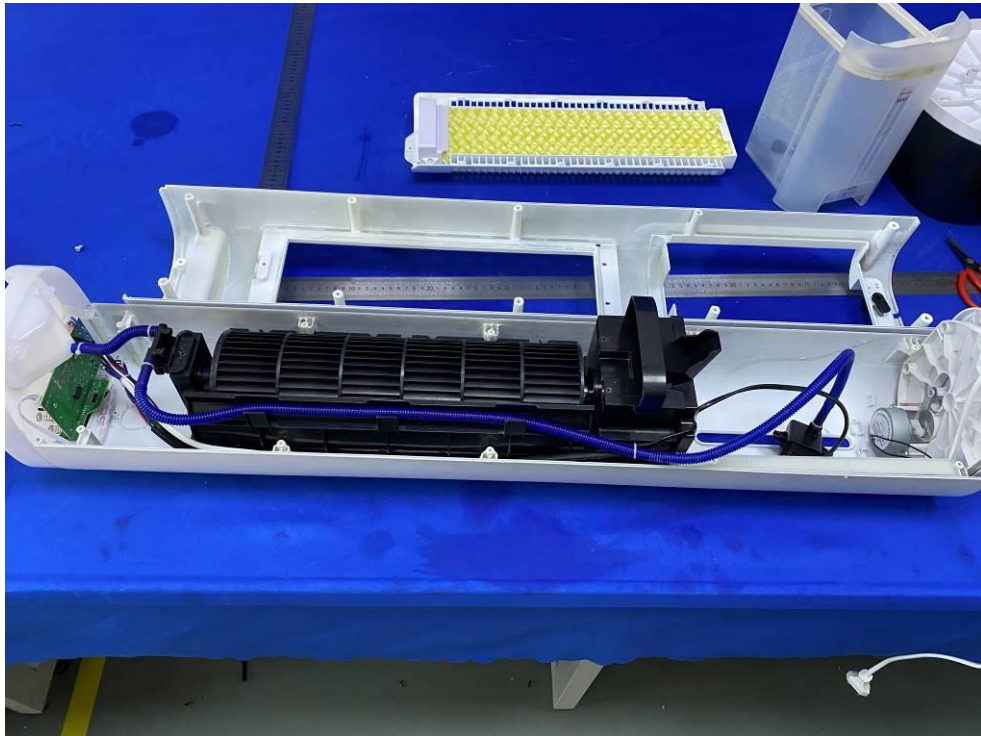


KFT2605D-S




KFT2605D-S




KFT2605D-S

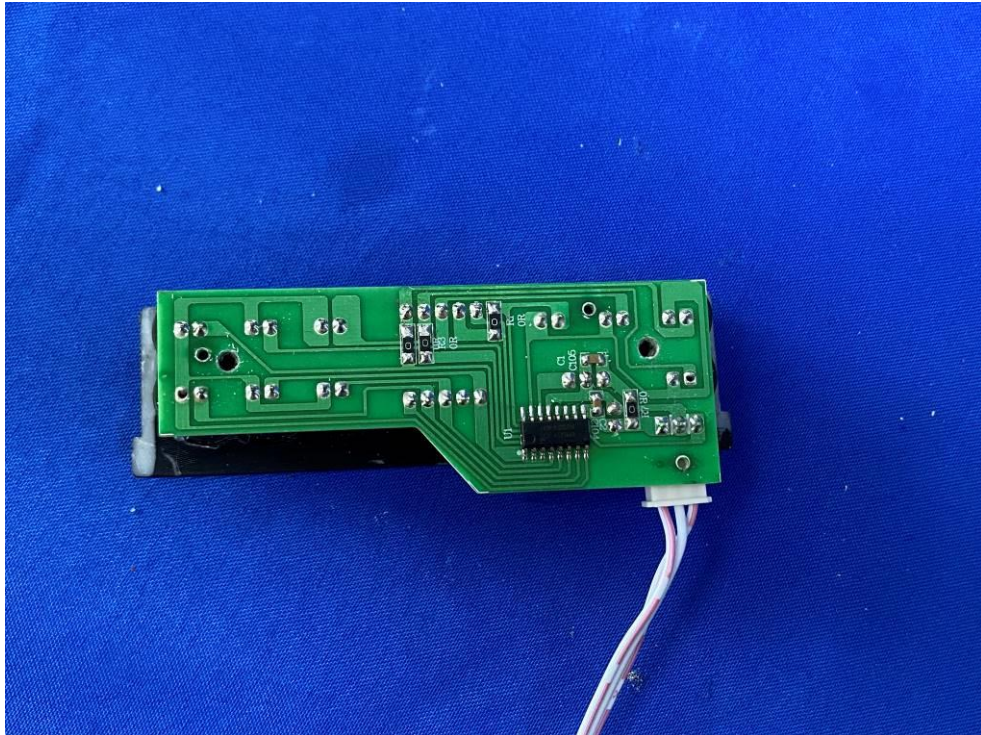


KFT2605D-S

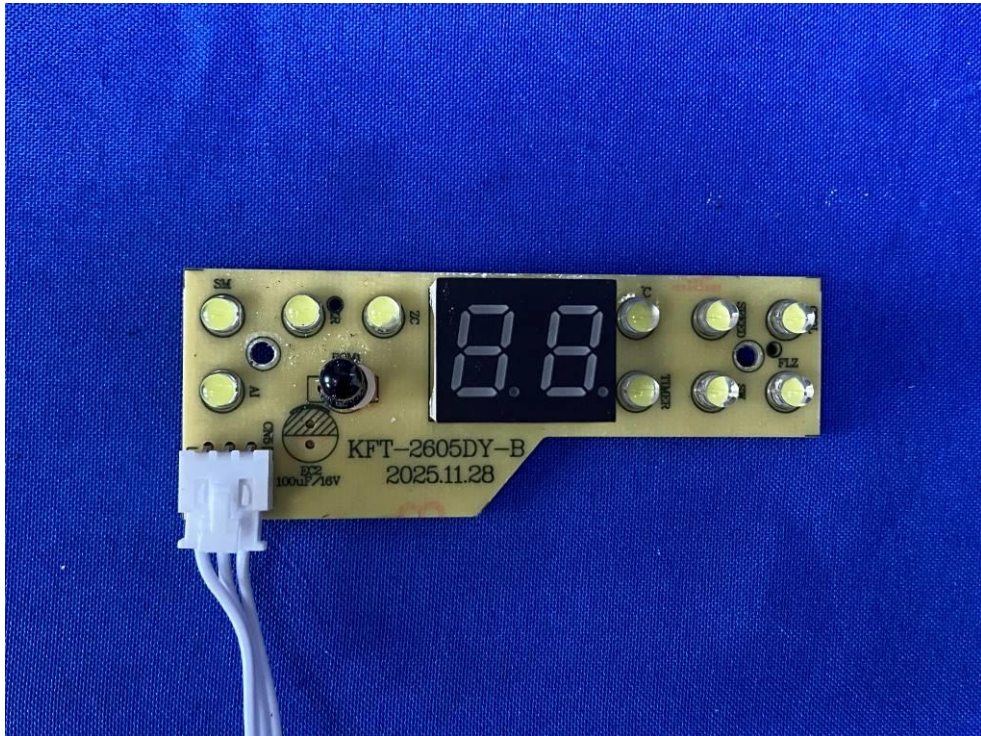

KFT2605D-S

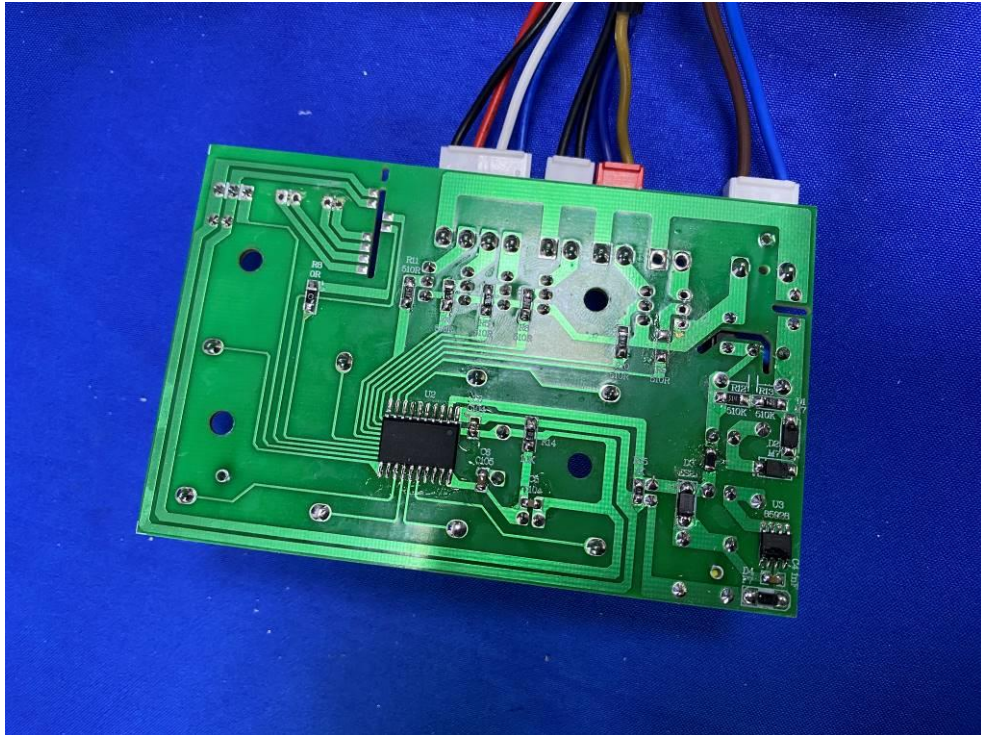


KFT2605D-S

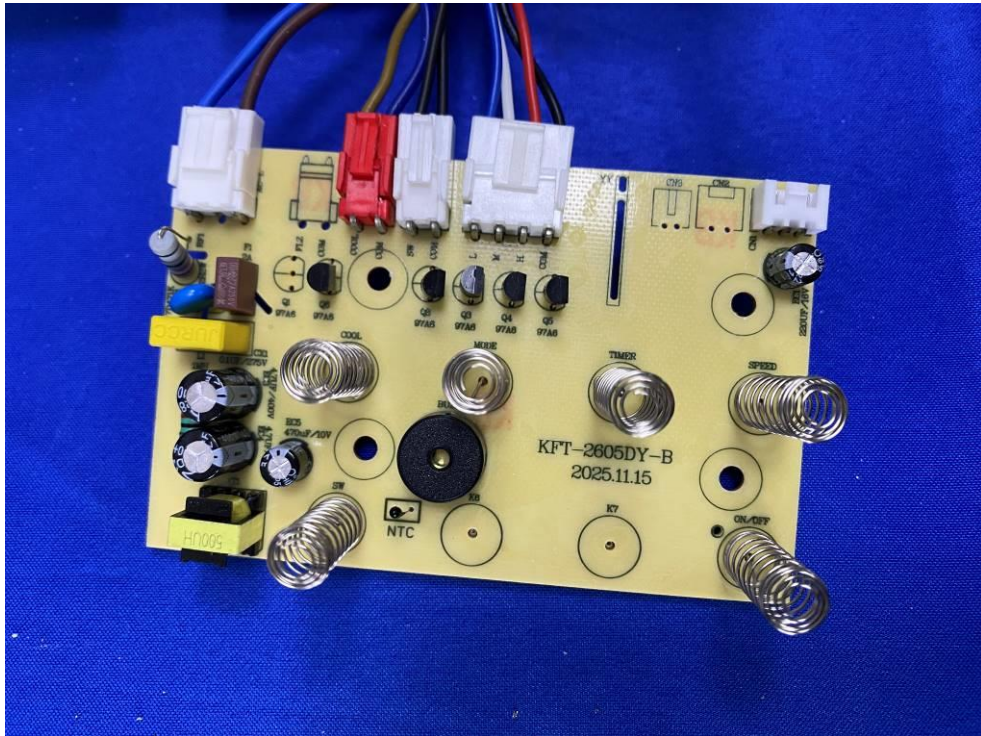


KFT2605J




KFT2605J

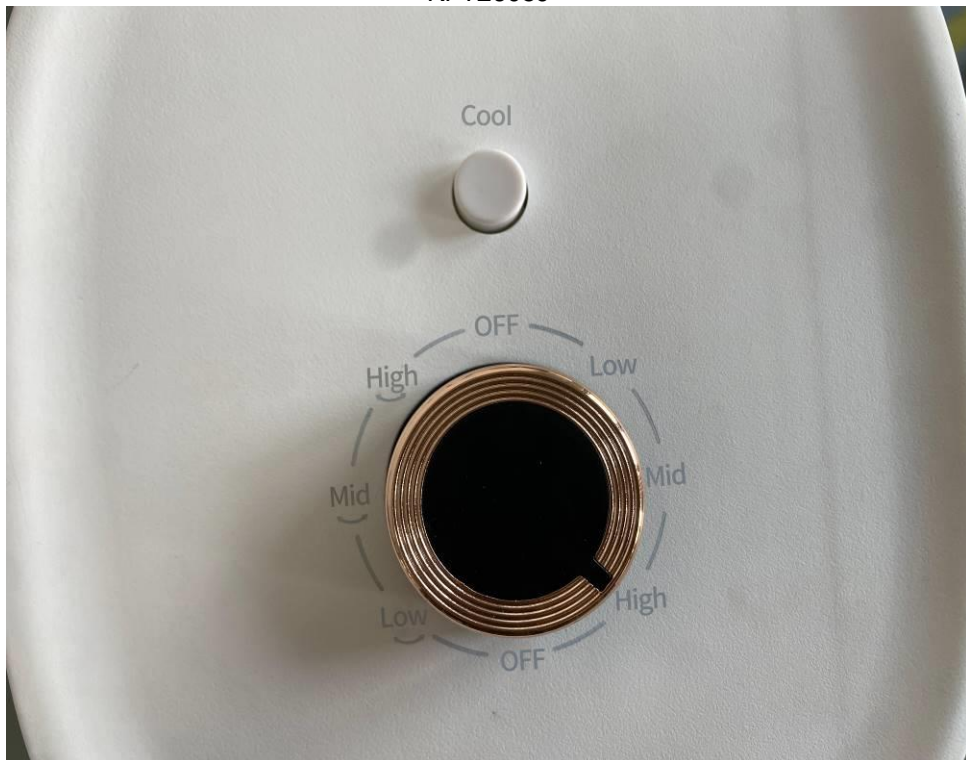

KFT2605J

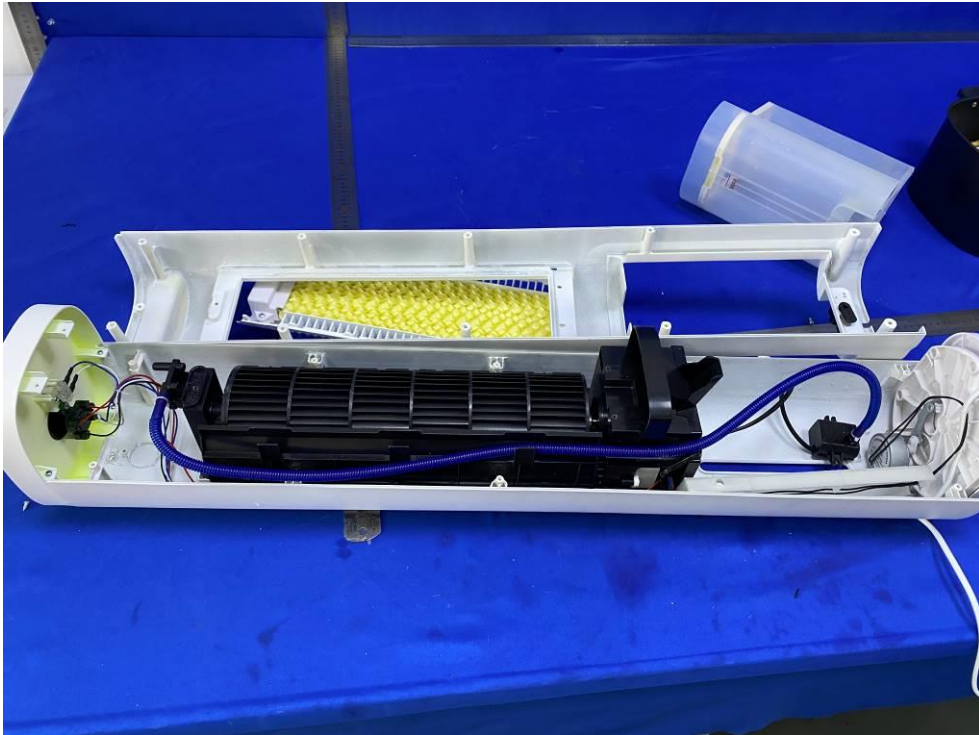


KFT2605J

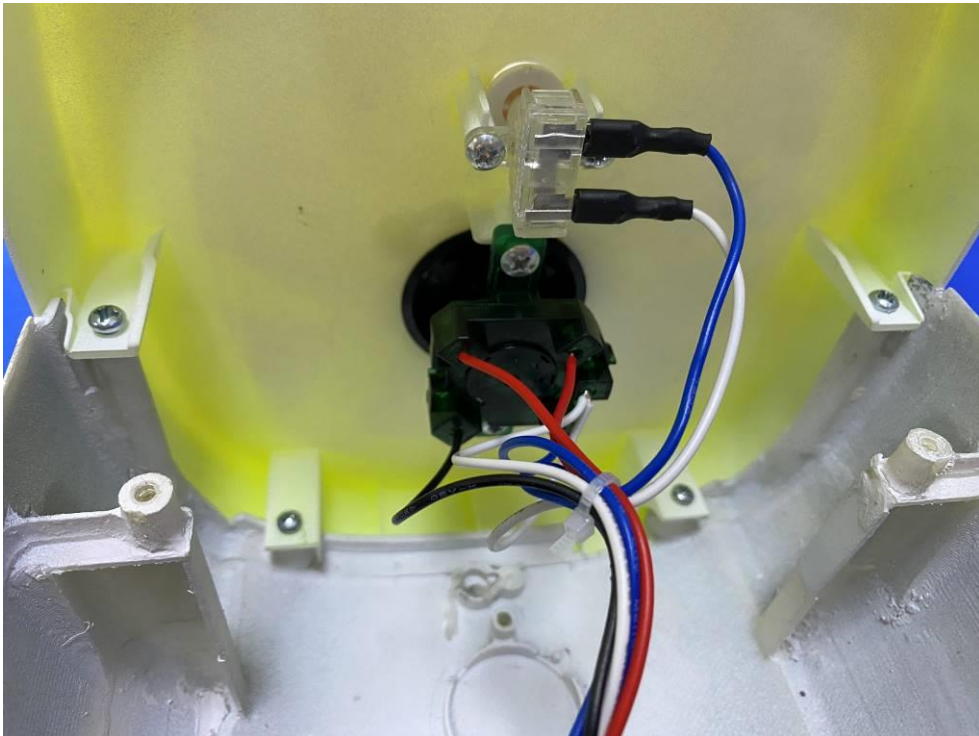

KFT2605D, KFT2605D-S, KFT2605J



KFT2605D, KFT2605D-S, KFT2605J

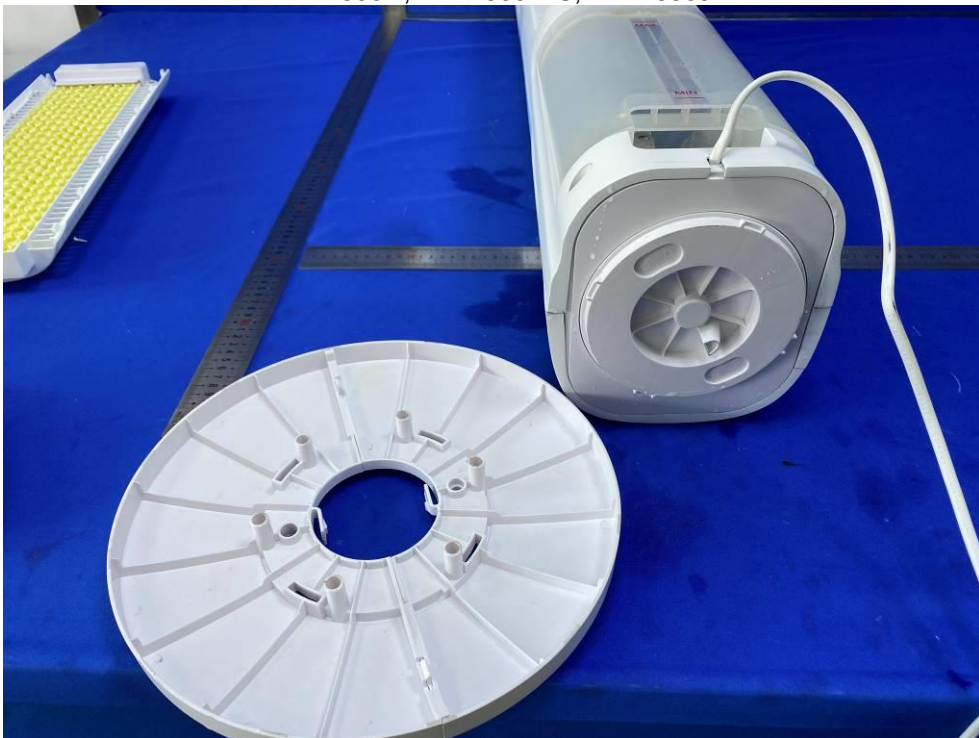

KFT2605D, KFT2605D-S, KFT2605J



KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J



KFT2605D, KFT2605D-S, KFT2605J




KFT2605D, KFT2605D-S, KFT2605J




KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J



KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J

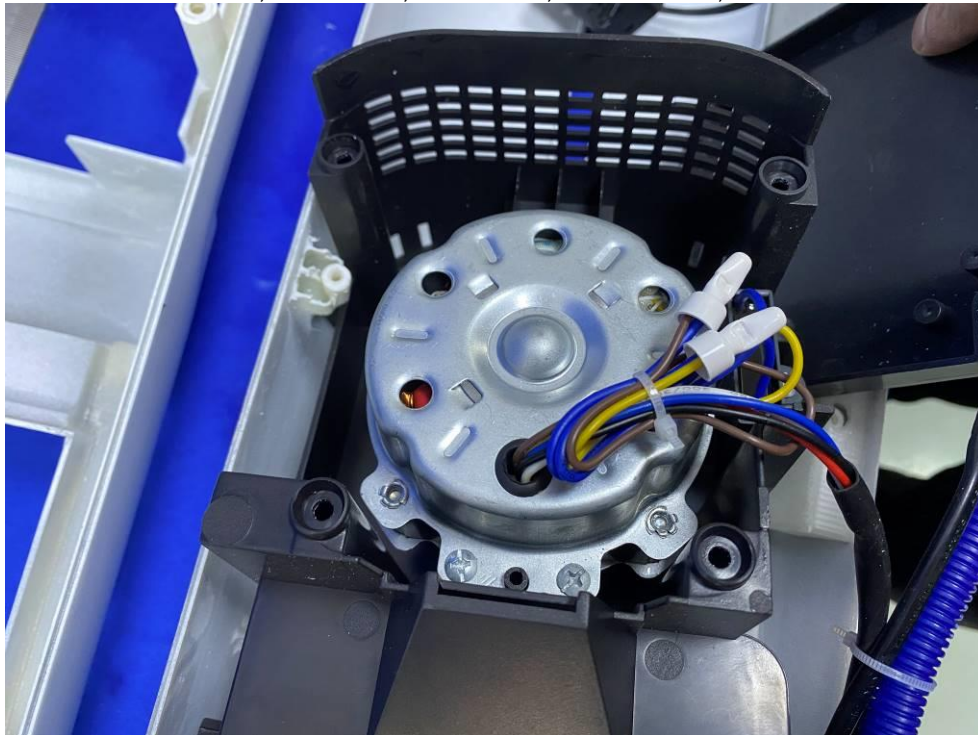

KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J

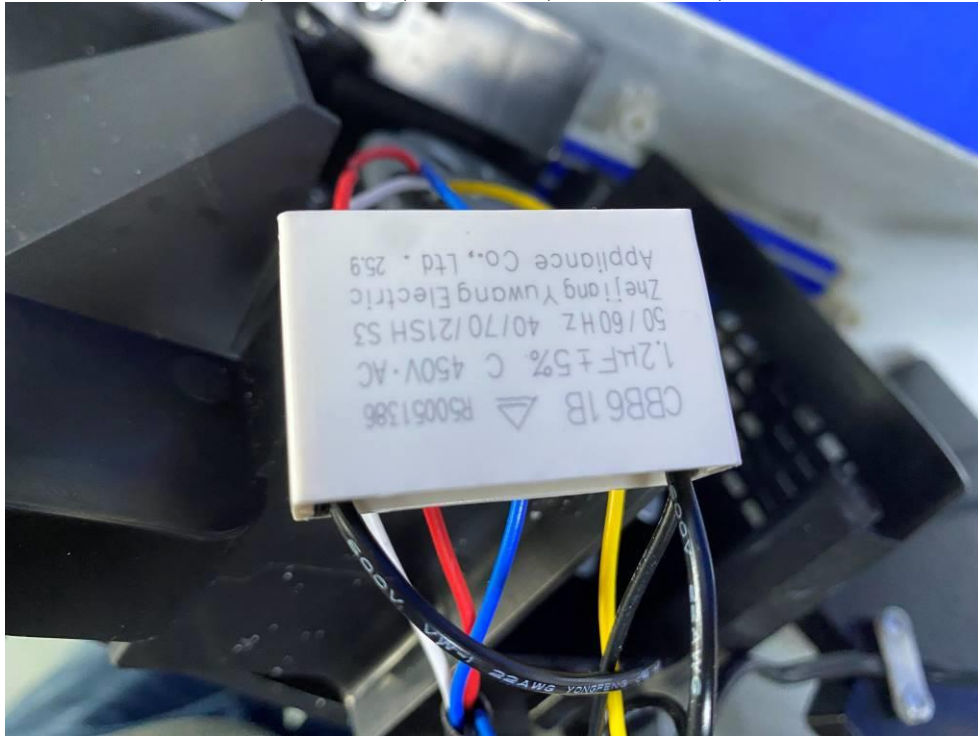

KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J



KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J



KFT2407J, KFT2407D, KFT2605D, KFT2605D-S, KFT2605J



For all models



For all models



## Appendix 2:

<b>IEC 60335-2-80:2015</b> <b>EUROPEAN GROUP DIFFERENCES AND EUROPEAN NATIONAL DIFFERENCES</b> HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES – SAFETY – PART 2-80: PARTICULAR REQUIREMENTS FOR FANS	
<b>Differences according to.....:</b>	<input checked="" type="checkbox"/> EN IEC 60335-2-80:2024 + A11:2024 used in conjunction with EN 60335-1:2012 + AC:2014 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 +A15:2021+A16:2023  <input checked="" type="checkbox"/> EN 62233:2008 + AC:2008

Clause	Requirement + Test	Result - Remark	Verdict
	<b>CENELEC COMMON MODIFICATIONS</b>		--
6.1	Delete "class 0" and "class 01"		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.1	Fans for tropical climates shall be marked with letter T, which is explained in then instructions		P
7.12	The instructions include the substance of the following:		--
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test, except that		P
	appliances normally used on the floor and having a mass exceeding 40 kg are not tilted		N/A
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		P
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		P
	parts intended to be removed for user maintenance are also not removed		P

Clause	Requirement + Test	Result - Remark	Verdict
8.1.3	Instead of test probe B, test probe 18 and test probe 13, for appliances other than those of class II, test probe 41 of IEC 61032 is applied with a force not exceeding 1 N to live parts of visibly glowing heating elements, all poles of which can be disconnected by a single switching action		N/A
8.2	Compliance is checked by inspection and by applying the test probes of EN 61032 in accordance with the conditions specified in 8.1.1		P
	Test probe B and probe 18 of EN 61032 are applied to built-in appliances and fixed appliances only after installation		P
8.2	Delete the addition		N/A
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N/A
19.9	APPLICABLE	Not for remotely or automatically use.	N/A
20.2	For appliances having dangerous moving parts, due to their working function, e.g. the needle of a sewing machine, tools of kitchen machines or the blade of an electrical knife, full protection is not possible for performing their intended use		N/A
	When using a test probe similar to test probe B of EN 61032, having a circular stop face and applied with a force of 5N, the accessories and detachable covers are removed		P
	When using test probe 18 it is applied with a force of 2,5N on the appliance fully assembled		P
21.101	Replaced by Fan guards are subjected to a push force and a pull force		P
	No access to dangerous moving parts with testprobe testfinger B with diameter 50mm and forced max 5N		P
22.12	Other parts intended to be detached during use, maintenance or cleaning (e.g. batteries, battery covers, lids, attachments, steam nozzles) are not considered as parts providing a similar function as handles, knobs, grips, levers		P
22.17	The requirement is not applicable to built-in appliances		N/A
22.44	If Appliance is child appealing if one of the following criteria is present Decorate using facing, cartoons, similar Using shapes of animals, persons , characters		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	Appliance is child appealing if more than one of the following criteria is present Using non functional lights Using non functional sounds Using non functional movement		N/A
	If the appliance is child appealing and less than 4kg or	Weight : ....Kg	N/A
	Mounted or intended use below 850mm following conditions apply		N/A
	No surface accessible testprobe 19 temperatue below value		N/A
	Hazardous parts not accessible by testporbe 19 under condition 20.2		N/A
	Live parts not accessible by testporbe 19 under condition 8.1.1		N/A
	Liquid below 38°C accessible by testporbe 19 under condition 20.2		N/A
	Vessels with 2 independent and sequal actions required		N/A
	22.12 is applicable for accessible parts		N/A
22.102.3	Not applicable		N/A
22.102.5	Not applicable		N/A
24.1	Components comply with the safety requirements specified in the relevant EN standards as far as they reasonably apply		P
	Motors are not required to comply with EN 60034-1, but tested as part of the appliance according to this standard		P
	Relays are tested as part of the appliance according to this standard		P
	Relays may be alternatively tested to EN 60730-1 and the additional requirements in EN 60335-1		P
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance		P
	Components may comply with the requirements for clearances and creepage distances for functional insulation as specified in the relevant component standard		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P

Clause	Requirement + Test	Result - Remark	Verdict
	Components that have not been tested and shown to comply with the EN standard for the relevant component are tested according to the requirements of 30.2 of this standard		P
	Components that have been tested and shown to comply with the resistance to fire requirements in the EN standard for the relevant component need not be retested provided that:		--
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		P
	- the test report for the component states the values of $t_e$ and $t_i$ acc. to EN 60695-2-11		P
	If the above two conditions are not satisfied, the component is tested as part of the appliance		P
	Power electronic converter circuits are not required to comply with EN 62477-1, but tested as part of the appliance according to this standard		P
	Unless components have been tested and found to comply with the relevant EN standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant EN standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been tested and found to comply with the relevant EN standard, and		P
	components that are not marked or not used in accordance with their marking,		P
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		P
	Lamp-holders and starter-holders that have not been tested and found to comply with the relevant EN standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant EN standard under the conditions occurring in the appliance		N/A
	Where the relevant EN standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		P
	There are no additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of EN 60320-1 and EN 60309, unless they are specifically mentioned in the text of this standard		P

Clause	Requirement + Test	Result - Remark	Verdict
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		P
	with connectors and appliance inlets complying with the standard sheets of EN 60320-1, if		P
	direct supply to these parts from the supply mains gives rise to a hazard		P
	For plugs used in CENELEC countries Annex ZH applies		P
24.1.7	When the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
	Compliance with Clause 8 of this standard is not impaired by connecting the appliance to a device covered by EN 41003		N/A
24.Z1	Type S2 and S3 capacitors according to EN 60252-1 are not required to undergo the testing as required by 30.2.2 and 30.2.3.1		P
25.1	Plugs and pins for insertion into socket outlets follow the relevant standards sheets in Annex ZH		P
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors, or		N/A
	when they are liable to be exposed to significant amount of ultraviolet radiation		N/A
25.25	Instead of IEC/TR 60083, dimensions of the pins and engagement face of plugs of appliances that are inserted into socket-outlets are in accordance with the dimensions of the relevant plug standard		N/A
	Common plugs and socket-outlets types in CENELEC countries as shown in Annex ZH		P
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position,		P
	unless they are held in place near the terminals independently of the solder		P
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N/A
32	Compliance regarding electromagnetic fields is checked according to EN 62233		P
Annex I, 19.I.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	The duration of any of the tests is as specified in 19.7		N/A
<b>ZA</b>	<b>ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS (EN)</b>		--
	<b>Denmark, Sweden, Norway and Finland</b>		N/A
7.12.8	The maximum inlet water pressure is at least 1,0 MPa .....		N/A
	<b>Norway</b>		N/A
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	<b>Norway</b>		N/A
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A
	<b>Denmark</b>		N/A
22.47	The maximum inlet water pressure is at least 1,0 MPa .....		N/A
	<b>Ireland and United Kingdom</b>		N/A
25.8	In the table, the line >10 A and ≤16 A is replaced with:		--
	> 10 and ≤ 13 1,25 (1,0) <sup>b</sup>		N/A
	> 13 and ≤ 16 1,5 (1,0) <sup>b</sup>		N/A
<b>ZB</b>	<b>ANNEX ZB (INFORMATIVE) A DEVIATIONS</b>		--
	<b>Ireland</b>		N/A
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	<b>United Kingdom</b>		P
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances.		P
	It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		P
<b>ZC</b>	<b>ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>		--
	A list of documents referred to in the text of this standard in such a way that some or all of their content constitutes requirements of this document		P
<b>ZD</b>	<b>ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS</b>		--
	List of IEC and CENELEC code designations for flexible cords		P
<b>ZE</b>	<b>ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE</b>		--
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative.....:		N/A
	Model or type reference .....		N/A
	Serial number, if any		N/A
	Production year		N/A
	Designation of the appliance.....:		N/A
7.12	Instructions provided with the appliance so that the appliance can be used safely		N/A
	The instructions contain at least the following information:		--
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N/A
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N/A
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	- the general description of the appliance, when needed due to the complexity of the appliance		N/A
	- specific precautions required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N/A
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N/A
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N/A
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N/A
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N/A
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N/A
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N/A
7.12.ZE1	If needed for specific appliances, the following information to be given:		--
	- on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		N/A
	- on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
	- on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		N/A
	- on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	- on the specifications on the spare parts to be used, when these affect the health and safety of the operator		N/A
	- on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		--
	For fans the A-weighted emission sound pressure level where this exceeds 70dB(A) shall be stated. If the A-weighted emission sound pressure level is below 70dB(A), no value need to be given , explanation in the instructions		N/A
	- the A-weighted emission sound Powerlevel has to be given if the A-weighted emission sound pressure level where this exceeds 80dB(A)		N/A
	if the A-weighted emission sound pressure level where this exceeds 80dB(A) instructions will include		N/A
	Warning		N/A
	Information about noise protection		N/A
7.12.ZE2	The instructions include a warning to disconnect the appliance from its power source during service and when replacing parts		N/A
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug is such that an operator can check from any of the points to which he has access that the plug remains removed		N/A
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		N/A
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N/A
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		--
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A
	Interlocking movable guards used where frequent access is required		N/A
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N/A
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N/A
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N/A
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A
	Where possible, guards are incapable of remaining in place without their fixings		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		--
			N/A
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations 5000 at 5/min...:		N/A
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A
	After these tests the interlock system is fit for further use		N/A
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		--
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A

Clause	Requirement + Test	Result - Remark	Verdict
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N/A
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N/A
	Such isolators are clearly identified, and		N/A
	they are capable of being locked if reconnection endanger persons		N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N/A
22.ZE.10	Airborne noise emissions, determined and declared in accordance with annex ZAA		N/A
ZAA	Emission of acoustical noise		N/A
ZAA 2.1	Built-in or partition fans		N/A
	Wall mounted or duct fan		N/A
ZAA 2.2	Emission sound pressure level determination		N/A
	A-weighted emission sound pressure level $L_{Pa}$ shall be determined by EN ISO 11203 determining sound power level $L_{WA}$ first		N/A
ZAA 2.3	Sound power level determination		N/A
ZAA 2.3.1	EN ISO 3744:2010		N/A
ZAA 2.3.1	Sound power level determination of floor/table/ceiling mounted appliances		N/A
	ISO 11201		N/A
ZAA 2.3.2	Sound power level determination for built-in partition fans(incl DUCT fans)		N/A
	ISO 13347-3/ ISO 13347-1		N/A
ZAA2.4	Mounting and installation conditions		N/A
ZAA 2.5	Operating conditions		N/A
ZAA 2.6	Measurement uncertainties		N/A
ZAA 2.7-2.8	Reporting		N/A
ZAA 2.9	Declaration and verification of noise emission values		N/A
<b>ZF</b>	<b>ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD</b>		--

Clause	Requirement + Test	Result - Remark	Verdict
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive) .....	LVD	P
<b>ZG</b>	<b>ANNEX ZG (NORMATIVE) UV APPLIANCES</b>		--
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
<b>ZH</b>	<b>ANNEX ZH (INFORMATIVE) Common plug and socket-outlet types in CENELEC countries</b>		--
	In general, supply cords of single-phase appliances having a rated current not exceeding 16 A are fitted with a plug complying with the following standard sheets:		--
	- for class I appliances or class II appliances with functional earth, standard sheet EU2, EU3 or EU4 .....		N/A
	- for class II appliances, standard sheet EU5, EU6 or EU7 .....		P
	There are exemptions or differences in certain CENELEC countries		P
<b>ZI</b>	<b>ANNEX ZI (INFORMATIVE) Information on the application of A11:2014 to EN 60335-1:2012 CENELEC CLC/TC 61(SEC)2096A</b>		--
	Clarification of the application of parts 2 in conjunction with the 2002 or 2012 version of EN 60335-1		P
<b>ZZA</b>	<b>ANNEX ZZA (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE SAFETY OBJECTIVES OF DIRECTIVE 2014/35/EU [2014 OJ L96] AIMED TO BE COVERED</b>		--
	This standard provides one means of conforming to safety objectives of Directive 2014/35/EU		P

Clause	Requirement + Test	Result - Remark	Verdict
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZA.1 confers a presumption of conformity with the safety objectives of that Directive and associated EFTA regulations		P
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the safety objectives		P
<b>ZZB</b>	<b>ANNEX ZZB (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE ESSENTIAL REQUIREMENTS OF DIRECTIVE 2006/42/EC AIMED TO BE COVERED</b>		--
	This standard provides one means of conforming to essential requirements of EU Directive 2006/42/EC		N/A
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZB.1 confers a presumption of conformity with the essential requirements of that Directive and associated EFTA regulations		N/A
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the essential health and safety requirements		N/A
	<b>ANNEX EN 62233:2008 + AC:2008 EMF- ELECTROMAGNETICS FIELDS</b>		--
	The tested product also complies with the requirements of EN 62233:2008		--
	Limit ..... 100%	Measured max. :<10%	P

**ATTACHMENT TO TEST REPORT IEC 60335-2-98  
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES**

Household and similar electrical appliances – Safety –  
Part 2-98: Particular requirements for humidifiers

**Differences according to** : EN 60335-2-98:2003 + A1:2005 + A2:2008  
EN 60335-1:2012

<b>CENELEC COMMON MODIFICATIONS</b>			
6.1	Delete “class 0” and “class 01”		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.10	Devices used to start/stop operational functions of the appliance distinguished from other manual devices by means of shape, size, surface texture, position, etc.		P
	An indication that the device has been operated is given by:		--
	- a tactile feedback, or		N/A
	- an audible and visual feedback		P
7.12	The instructions include the substance of the following:		--
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
7.12.Z1	The specific instructions related to the safe operation of this appliance is collated together in the front section of the user instructions		P
	The height of the characters, measured on the capital letters, is at least 3 mm	>3 mm	P
	These instructions are also available in an alternative format, e.g. on a website		P
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test		P
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		P

	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		P
	parts intended to be removed for user maintenance are also not removed		P
8.2	Compliance is checked by applying the test probes of EN 61032		P
	For built-in appliances and fixed appliances, the test probe B and probe 18 of EN 61032 are applied only after installation		N/A
11.8	Footnotes to “External enclosure of motor-operated appliances” to be taken into account		P
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N/A
20.2	When using the test probe similar to test probe B with a circular stop face, the accessories and detachable covers are removed		P
	Test probe 18 applied with a force of 2,5 N on the appliance fully assembled		P
24.1	Components comply with the safety requirements specified in the relevant standards as far as they reasonably apply		P
	The requirements of clause 29 of this standard apply between live parts of components and accessible parts of the appliance.		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P
	Components that have not been previously tested or do not comply with the standard for the relevant component are tested according to the requirements of 30.2		P
	Components that have been previously tested and shown to comply with the resistance to fire requirements in the standard for the relevant component need not be retested provided that:		--
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		P
	- the test report for the component states whether it complied with the standard for the relevant component with or without flame, flames not exceeding 2 s during the test are ignored		P
	Unless components have been previously tested and found to comply with the relevant standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P

	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been separately tested and found to comply with the relevant standard, and		P
	components that are not marked or not used in accordance with their marking,		P
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		P
	Lamp holders and starter holders that have not been previously tested and found to comply with the relevant standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant standard under the conditions occurring in the appliance		N/A
	Where the relevant standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of clause 11 are used		P
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		N/A
	with connectors and appliance inlets complying with the standard sheets of IEC 60320-1,		N/A
	if direct supply to these parts from the supply mains gives rise to a hazard		N/A
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is EN 41003		N/A
	Compliance with clause 8 of this standard is not impaired by connecting the appliance to a device covered by EN 41003		N/A
24.Z1	For motor running capacitors (IEC 60252-1 type P2) with a metallic enclosure having an overpressure fuse the flame testing of internal plastic parts supporting current carrying connections as required in 30.2.2 and 30.2.3.1 is not necessary		N/A
25.6	Supply cords of single-phase portable appliances having a rated current not exceeding 16 A, fitted with a plug complying with the following standard sheets of IEC/TR 60083:		--
	- for class I appliances: standard sheet C2b, C3b or C4 .....		N/A

	- for class II appliances: standard sheet C5 or C6..... :	Replaced by Annex ZH	P
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors or when they are liable to be exposed to significant amount of ultraviolet radiation		N/A
	Halogen-free thermoplastic compound sheathed supply cords have properties at least those of:		--
	- halogen-free thermoplastic compound sheathed cords (H03Z1Z1H2-F or H03Z1Z1-F), for appliances having a mass not exceeding 3 kg		N/A
	- halogen-free thermoplastic compound sheathed cords (H05Z1Z1H2-F or H05Z1Z1-F), for other appliances		N/A
	Cross-linked halogen-free compound sheathed supply cords have properties at least those of cross-linked halogen-free compound sheathed cords (H07ZZ-F)		N/A
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position unless they are held in place near the terminals independently of the solder		P
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N/A
32	Compliance regarding electromagnetic fields is checked according to EN 62233		P
Annex I, 19.I.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		N/A
	The duration of the test is as specified in 19.7		N/A
<b>ZA</b>	<b>ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS</b>		--
	<b>Norway</b>		--
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	<b>Norway</b>		--
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A

	<b>All CENELEC countries</b>	--
25.6 and 25.25	Information concerning National plug and socket-outlets is available from the CENELEC website. Normative national requirements concerning plug and socket-outlets are shown in the relevant National standard	P
	<b>Ireland and United Kingdom</b>	--
25.8	In the table, the lines for 10 A and 16 A are replaced by:	--
	> 10 and ≤ 13 1,25	N/A
	> 13 and ≤ 16 1,5	N/A
<b>ZB</b>	<b>ANNEX ZB (INFORMATIVE) A-DEVIATIONS</b>	--
	<b>Ireland</b>	--
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances	N/A
	<b>United Kingdom</b>	--
25.6	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances. It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes	P
<b>ZC</b>	<b>ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>	--
	A list of referenced documents in this standard	P
<b>ZD</b>	<b>ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS</b>	--
	A table with IEC and CENELEC code designations for flexible cords	P
<b>ZE</b>	<b>ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE</b>	--

7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative .....		N/A
	Model or type reference .....		N/A
	Serial number, if any .....		N/A
	Production year		N/A
	Designation of the appliance .....		N/A
7.12	Instructions provided with the appliance so that the appliance can be used safely		N/A
	The instructions contain at least the following information:		--
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N/A
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N/A
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N/A
	- the general description of the appliance, when needed due to the complexity of the appliance		N/A
	- specific precautions if required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N/A
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N/A
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N/A
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N/A
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N/A
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N/A
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N/A

7.12.ZE1	If needed for specific appliances, the following information to be given:		--
	- on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		N/A
	- on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
	- on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		N/A
	- on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		N/A
	- on the specifications on the spare parts to be used, when these affect the health and safety of the operator		N/A
	- on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		--
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A).....;		N/A
	- where this level does not exceed 70 dB(A), this fact is indicated		N/A
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa) :		N/A
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A).....:		N/A
7.12.ZE2	The instructions includes a warning to disconnect the appliance from its power source during service and when replacing parts		N/A
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which he has access that the plug remains removed		N/A
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A

19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		N/A
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N/A
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		--
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A
	Interlocking movable guards used where frequent access is required		N/A
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N/A
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A

22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N/A
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts only removable with the use of tools		N/A
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A
	Where possible, guards are incapable of remaining in place without their fixings		N/A
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		--
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2..... :		N/A

	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A
	After these tests the interlock system is fit for further use		N/A
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		--
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N/A
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N/A
	Such isolators are clearly identified, and		N/A
	they are capable of being locked if reconnection endanger persons		N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N/A
<b>ZF</b>	<b>ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD</b>		--
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive) .....	LVD	P
<b>ZG</b>	<b>ANNEX ZG (NORMATIVE) UV APPLIANCES</b>		--
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A

32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
<b>ZZ</b>	<b>ANNEX ZZ (INFORMATIVE) COVERAGE OF ESSENTIAL REQUIREMENTS OF EC DIRECTIVES</b>		--
	Description of the relation between this European standard and the LVD (Low Voltage Directive, 2006/95/EC) and the MD (Machinery Directive, 2006/42/EC)	The new Low Voltage Directive 2014/35/EU is applicable from 20 April 2016	P

EN 60335-2-98:2003/A11 :2019			
Clause	Requirement – Test	Result - Remark	Verdict
<b>7</b>	<b>Marking and instructions</b>		--
7.1	Add a further dashed item:		--
	– If the appliance is an ultrasonic humidifier or impeller humidifier, it shall be marked with the symbol "Clean the water tank every 3 days" or by similar text.		N/A
7.6	Additional symbols		N/A
7.12	Replace the addition by the following:		--
	The instructions shall include details regarding filling, cleaning and descaling.		P
	If symbols referred to in 7.1 or 7.6 of this amendment are used, then their meaning shall be explained in the instructions.		P
	The instructions shall state the substance of the following:		P
	– Be aware that high humidity levels may encourage the growth of biological organisms in the environment.		P
	– Do not permit the area around the humidifier to become damp or wet. If dampness occurs, turn the output of the humidifier down. If the humidifier output volume cannot be turned down, use the humidifier intermittently. Do not allow absorbent materials, such as carpeting, curtains, drapes, or tablecloths, to become damp.		P
	– Unplug the appliance during filling and cleaning.		P
	– Never leave water in the reservoir when the appliance is not in use.		P

EN 60335-2-98:2003/A11 :2019			
Clause	Requirement – Test	Result - Remark	Verdict
	– Empty and clean the humidifier before storage. Clean the humidifier before next use.		P
	The instructions for ultrasonic humidifiers and impeller humidifiers shall state the substance of the following:		--
	Warning: Micro-organisms that may be present in the water or in the environment where the appliance is used or stored, can grow in the water reservoir and be blown in the air causing very serious health risks when the water is not renewed and the tank is not cleaned properly every 3 days.		N/A
	The instructions for ultrasonic humidifiers and impeller humidifiers not provided with specific antibacterial features shall state the substance of the following:		--
	– Empty the tank and refill every third day. Before refilling, clean it with fresh tap water or cleaning agents if required by the manufacturer. Remove any scale, deposits, or film that has formed on the sides of the tank or on interior surfaces, and wipe all surfaces dry.		N/A
	– The instructions for ultrasonic humidifiers and impeller humidifiers provided with specific antibacterial components to be added to the water, shall state, if relevant, the type or characteristics of the antibacterial component to be used and shall clarify that these additives shall be added to the water at each refilling.		N/A
	The instructions for steam vaporizer humidifier shall state the substance of the following:		--
	– Keep the appliance out of the reach of children. Steam and boiling water may cause burns.		N/A
	The instructions for electrode-type appliances shall include the substance of the following:		--
	– the composition and quantity of solution to be used and advice not to use an excessive amount of salt;		N/A
	– the appliance is not to be operated from a d.c. supply.		N/A
7.14	The height of the symbols "Clean the water tank every three days" and "IEC 60417-5575 (2007-01)" shall be at least 12 mm.		N/A
	The height of the text "Clean the water tank every three days" shall be 8 mm measured on the capital letters.		N/A

EN 60335-2-98:2003/A11 :2019			
Clause	Requirement – Test	Result - Remark	Verdict
7.15	The symbol or the text for "Clean the water tank every three days" shall be clearly visible from the outside of appliance in normal use.		N/A
22.Z101	Water reservoirs of ultrasonic or impeller type humidifiers not provided with specific antibacterial features shall be constructed so that every internal surface in touch with water is easily accessible for cleaning.		N/A
	Inspection is made by using test probe B of EN 61032, which should be able to access all surfaces and within 3 mm of any corners.		N/A
22.Z102	Ultrasonic and impeller humidifiers not provided with specific antibacterial features shall give an audible and visible indication after a maximum interval of 3 days since last refill and every time when the appliance is energised. The indication shall remain until action by the user (e.g. cleaning and filling the container with fresh water or resetting the alarm) is taken.		N/A
	Compliance is checked by inspection.		N/A
22.Z103	For ultrasonic and impeller humidifiers provided with specific antibacterial features (e.g. by construction, by chemical additives, etc.), the manufacturer shall deliver a declaration, with supporting documentation, to give evidence of the effectiveness of antibacterial features.		N/A
	Compliance is checked by inspection of the documentation delivered.		N/A
22.Z104	Appliances shall be constructed so that lubricants are prevented from polluting the water in the reservoir.		N/A
	Compliance is checked by inspection.		N/A

## Appendix 3: equipment list

Test used	Equipment name / model	Equipment ID	Last Calibration date	Calibration due date
√	<b>Caliper</b>	B1040199SH	13-Oct-2	12-Oct-26
√	<b>Stopwatch</b>	B2040029SH	1-Dec-25	30-Nov-26
	<b>Test Probe (IEC60529 test probe 1A)</b>	F2000012SH	21-May-25	20-May-26
√	<b>Test finger (IEC61032 test probe B)</b>	F2000748SH	26-Sep-25	25-Sep-26
√	<b>Test finger nail</b>	F2000716SH	26-Sep-25	25-Sep-26
	<b>Test probe (IEC61032 test probe 41)</b>	F2000648SH	6-Feb-25	5-Feb-26
√	<b>Short test pin (IEC61032 test probe 13)</b>	F2000647SH	26-Sep-25	25-Sep-26
	<b>Test finger (IEC61032 test probe B with 125mm circle stop)</b>	F2000765SH	21-May-25	20-May-26
√	<b>Push &amp; pull scale</b>	B3040114SH	26-Nov-25	25-Nov-26
√	<b>Impact hammer</b>	B3040122SH	11-Oct-25	10-Oct-26
	<b>Torque screwdriver kit(0,6-2.6N.m)</b>	B3080060SH	8-Aug-25	7-Aug-26
√	<b>Child test finger (IEC61032 test probe 18)</b>	F2000772SH	16-Jun-25	15-Jun-26
	<b>Child test finger (IEC61032 test probe 18)</b>	F2000147SH	16-Jun-25	15-Jun-26
	<b>Test Probe ((IEC/EN 60335-2-14, 20.103)</b>	F2000140SH	15-Jan-25	14-Jan-26
	<b>Torque tester for cord anchorage test</b>	B3080001SH	16-May-25	15-May-26
	<b>Indicator with 42 V</b>	F4000143SH	no need calibration	
√	<b>Ruler</b>	B1040083SH	7-Jul-25	6-Jul-26
√	<b>Balance</b>	B3041012SH	6-Aug-25	5-Aug-26
	<b>Stability tester</b>	G4000124SH	no need calibration	
	<b>Angle meter</b>	B1060017SH	13-Oct-25	12-Oct-26
	<b>Weight for impact for induction hob</b>	F4000491SH	21-May-25	20-May-26
	<b>Test guage (IEC/EN 60335-2-16 Figure 14)</b>	F4000578SH	16-Jun-25	15-Jun-26
	<b>Test guage (IEC/EN 60335-2-16 CL.20 D:223mm)</b>	F4000579SH	18-Jun-25	17-Jun-26
	<b>Test guage (IEC/EN 60335-2-16 CL.20 D:7mm)</b>	F4000580SH	18-Jun-25	17-Jun-26
	<b>Test guage (IEC/EN 60335-2-116 CL.22)</b>	F4000581SH	18-Jun-25	17-Jun-26
	<b>Heating Zone impactor(EN 60335-2-9;EN 60335-2-6;EN 60335-2-36)</b>	F4000490SH	21-May-25	20-May-26
	<b>Heating Zone impactor(EN 60335-2-9;EN 60335-2-6;EN 60335-2-36)</b>	F4000491SH	21-May-25	20-May-26
	<b>Steel plate(IEC 60335-2-2 Cl.21.101)</b>	F4000291SH	8-Feb-25	7-Feb-26
	<b>Steel plate(IEC 60335-2-2 Cl.21.101)</b>	F4000292SH	8-Feb-25	7-Feb-26

	<b>Cylindrical receptacle(IEC 60335-2-35 Clause 22.108)</b>	F4000199SH	20-Aug-25	19-Aug-26
	<b>Hardwood dowel(IEC60335-2-25 clause 21.105)</b>	F4000178SH	8-Jun-25	7-Jun-26
	<b>Polyethylene disks(IEC 60335-2-5 Clause 22.103)</b>	F4000200SH	20-Aug-25	19-Aug-26
	<b>Detail of scratching tool tip(IEC 60335-2-24 Figure 102)</b>	F4000218SH	15-Jan-25	14-Jan-26
√	<b>Ohmmeter</b>	A1300011SH	5-Jun-25	4-Jun-26
	<b>Earthing continuity tester</b>	A6620008SH	6-Aug-25	5-Aug-26
	<b>AC power supply</b>	A7040056SH	23-Jun-25	22-Jun-26
	<b>Numeric multimeter</b>	<u>A1240133SH</u>	9-Jan-25	8-Jan-26
	<b>Data acquisition/switch unit</b>	A7440029SH	25-Nov-25	24-Nov-26
	<b>Test corner</b>	G2000012SH	no need calibration	
	<b>AC power supply</b>	A7040050SH	15-Mar-25	14-Mar-27
	<b>Numeric multimeter</b>	A1240056SH	25-Nov-25	24-Nov-26
	<b>Data acquisition/switch unit</b>	A7440025SH	25-Nov-25	24-Nov-26
	<b>Test corner</b>	G2000151SH	no need calibration	
√	<b>AC power supply</b>	A7040011SH	15-Mar-25	14-Mar-27
√	<b>Numeric multimeter</b>	A1240077SH	6-Aug-25	5-Aug-26
√	<b>Data acquisition/switch unit</b>	A7440023SH	6-Aug-25	5-Aug-26
√	<b>Test corner</b>	G2000271SH	no need calibration	
√	<b>Heating cabinet</b>	D1020012SH	6-Aug-25	5-Aug-26
√	<b>Ball pressure</b>	F2000003SH	17-Mar-25	16-Mar-27
√	<b>Microscope</b>	B1040134SH	18-Feb-25	17-Feb-26
√	<b>Glow-wire test apparatus</b>	G4000160SH	5-Jun-25	4-Jun-26
√	<b>Tracking test apparatus</b>	G4000161SH	5-Jun-25	4-Jun-26
√	<b>Needle flame test apparatus</b>	G4000123SH	20-Dec-25	19-Dec-26
	<b>Apparatus for IPX</b>	D1080034SH	7-May-25	6-May-26
√	<b>Leakage current tester</b>	A1060009SH	13-Nov-25	12-Nov-26
√	<b>Withstanding voltage tester</b>	A6600012SH	7-May-25	6-May-26
	<b>Cable flexing apparatus</b>	G2000228SH	6-Aug-25	5-Aug-26
	<b>Oscilloscope</b>	A4089049SH	6-Aug-25	5-Aug-26
	<b>RH chamber</b>	D1080039SH	11-Aug-25	10-Aug-26
	<b>AC power supply for RH chamber</b>	A7040103SH	30-May-25	29-May-27
	<b>AC power supply for RH chamber</b>	A7040104SH	22-Dec-24	21-Dec-26
	<b>Power hitester for RH chamber</b>	A1240111SH	9-Jan-25	8-Jan-26

	<b>Power hitester for RH chamber</b>	A1240112SH	9-Jan-25	8-Jan-26
	<b>Data acquisition/switch unit</b>	A7440037SH	6-Aug-25	5-Aug-26

<End of report>